


PA Amplifier

NT - 120PA

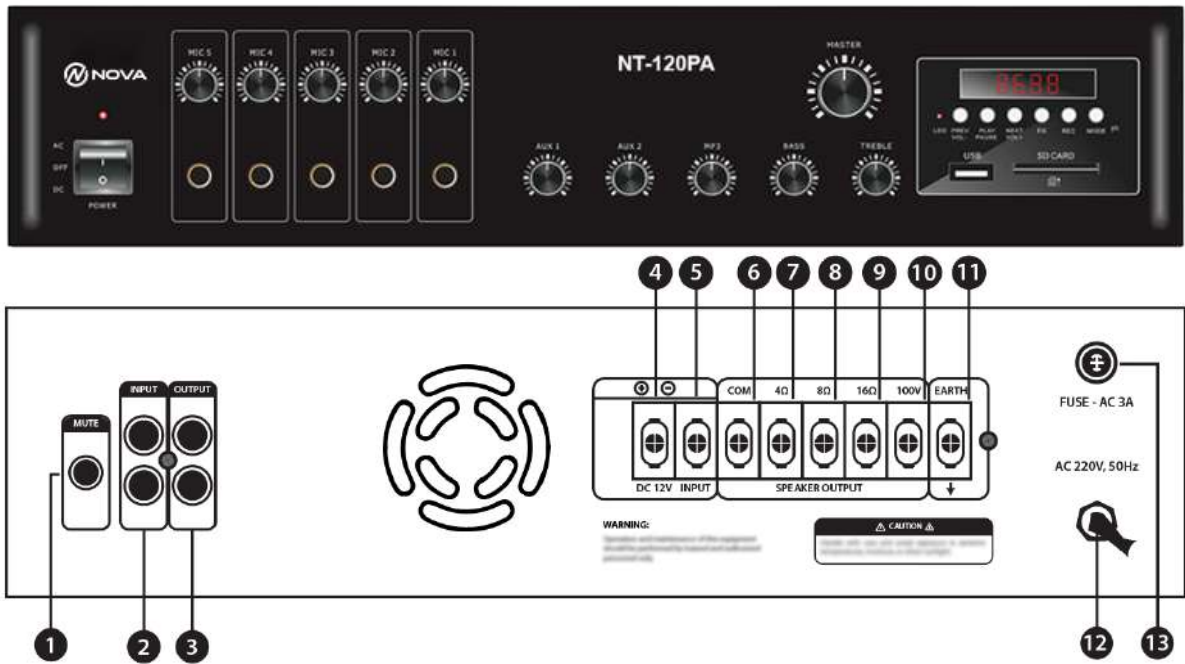

PA Amplifier (NT-120PA)

The NT-120PA is a professional audio amplifier ideal for PA systems, emergency broadcasts, and general sound reinforcement. It supports USB, Bluetooth, and radio playback for versatile connectivity. With 5 mic inputs, 2 AUX inputs, and 1 line output, it accommodates multiple audio sources. It offers 100V constant voltage and 4Ω, 8Ω, 16Ω resistance outputs, ensuring compatibility with various speaker systems. Built-in short-circuit, overheating protection, and emergency broadcast insertion enhance safety. Independent mic volume, high/low sound control, and a robust design make it perfect for commercial, educational, and public settings.

TECHNICAL DATA SPECIFICATION

Model	NT-120PA
Line Voltage:	100 v
Mic and Aux:	5 Microphone, Aux 2 input
Power Supply:	AC: 240V-50Hz DC: 24V (Car Battery)
Speaker Outputs Taps:	4Ω, 8Ω, 16Ω & 100V
Rated Power:	120W
Dimension:	430*300*88mm
Weight:	8.5 KG
Panel Color:	Black

KEY FEATURES

The NT-120PA audio amplifier offers USB, Bluetooth, and radio playback, along with 5 microphone inputs, 2 AUX inputs, and 1 line output for versatile audio connectivity. It supports 100V constant voltage and 4Ω, 8Ω, 16Ω resistance outputs, making it compatible with various speaker systems.

QUICK GUIDE

This versatile audio device features plug-and-play USB compatibility, supporting radio and Bluetooth functions. It includes 5 microphone inputs, 2 auxiliary inputs, and 1 line output for flexible connectivity. The system offers 100V constant voltage output and adjustable resistance settings (4, 8, and 16).

