

PRODUCT DATA SHEET



PART NUMBER – BLC1F265L7: BRAH Electric, aftermarket direct replacement contactors for Telemecanique LC1F265L7, TeSys F Series, type LC1F, 3P, 3PH, 350A, 600V, 75HP @ 240V, 150HP @ 480V, 175HP @ 600V, complete with 208V AC coil, AC magnetic contactor, suitable for use with LC1-F series motor control systems


PRODUCT SPECIFICATIONS

MAGNETIC CONTACTOR
PART NO. BLC1F265L7

TYPE	VALUE (UNITS)	NOTES	COMMENTS
PHASE	3		
POLES	3		
VOLTAGE	600 (VAC)		
AMPERAGE	350 (A)		
COIL VOLTAGE MIN	208 (V)		
COIL VOLTAGE MAX	208 (V)		
MIN HP. RATING	75 (HP)	@ 240V	
MAX HP RATING	175 (HP)	@ 600V	




Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of one year, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric.

STOPS FOR ATTACHING FRONT MOUNTED ACCESSORIES

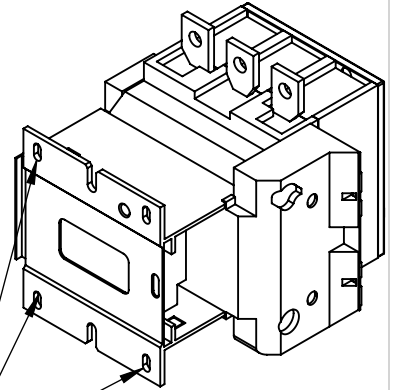


Technical drawing of the front view of a rectangular component. The drawing shows a central rectangular body with a rounded front edge. There are three mounting holes on the top and bottom edges, each with a cross symbol. The dimensions are as follows:

- Top edge: 4.01 [101.9]
- Right edge: 8X Ø0.26 [6.5]
- Bottom edge: 5.04 [128.0]
- Left edge: 5.71 [145.0]
- Inner left edge: 4.72 [119.9]
- Inner right edge: 4.44 [112.9]

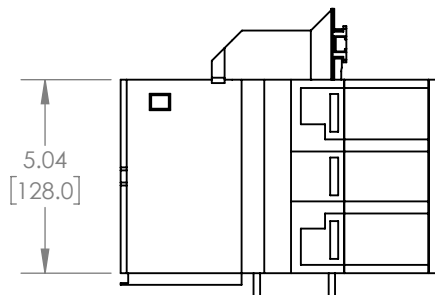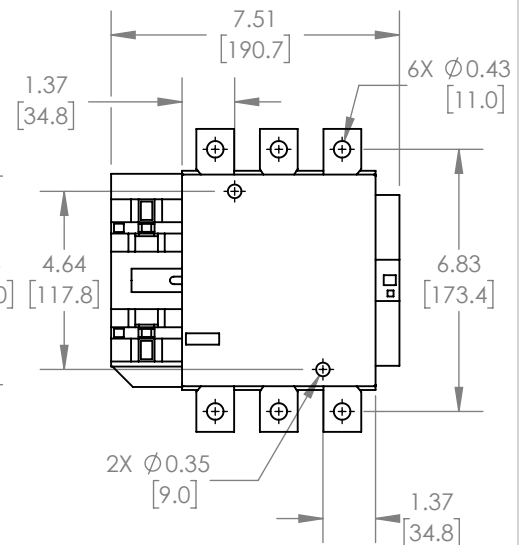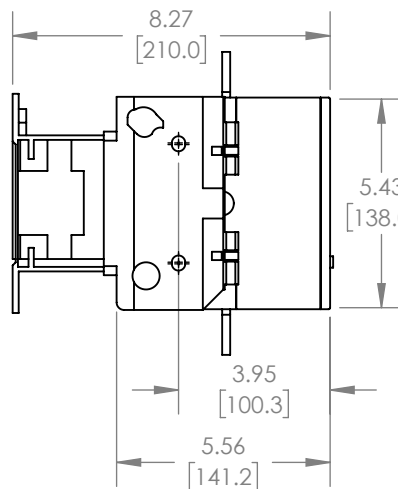

***NOTE: BRAH ELECTRIC
CONTRACTOR BLC1F265L7 IS
AN AFTERMARKET DIRECT
REPLACEMENT FOR LC1F265L7,
LC1-F SERIES. SUITABLE FOR
USE WITH LC1-F SERIES
MOTOR CONTROL SYSTEMS**



THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
BRAH ELECTRIC. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF BRAH ELECTRIC
IS PROHIBITED.

ALL DIMENSIONS ARE IN INCHES
METRIC UNITS ARE DISPLAYED
BENEATH IN [MM.]

DO NOT SCALE DRAWING



MAGNETIC CONTACTOR

SHEET 1 OF 1

REV.
A