

PRODUCT DATA SHEET



PART NUMBER – BLC2D2510-R7: BRAH Electric, aftermarket direct replacement reversing contactors for Telemecanique LC2D2510-R7, TeSys D Series, type LC2D, 3P, 3PH, 40A, 600V, 7.5HP @ 240V, 15HP @ 480V, 20HP @ 600V, both complete with 440V 50/60Hz AC coil, and 1 N/O auxiliary contact, AC magnetic contactor, suitable for use with LC2-D series motor control systems



PRODUCT SPECIFICATIONS

MAGNETIC CONTACTOR
PART NO. BLC2D2510-R7

TYPE	VALUE (UNITS)	NOTES	COMMENTS
PHASE	3		
POLES	3		
VOLTAGE	600 (VAC)		
AMPERAGE	40(A)		
COIL VOLTAGE MIN	440 (V)		
COIL VOLTAGE MAX	440 (V)		
MIN HP. RATING	7.5 (HP)	@ 240V	
MAX HP RATING	20 (HP)	@ 600V	

Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of one year, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

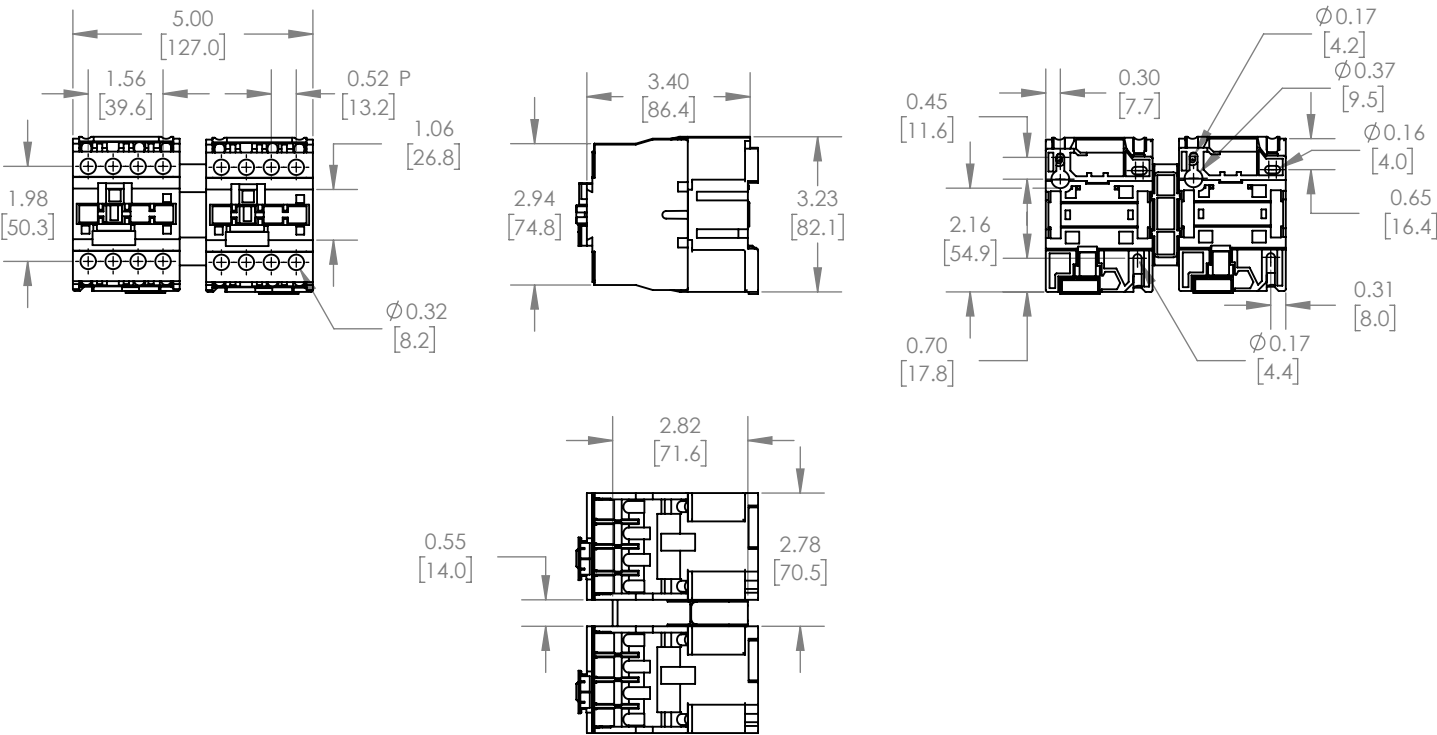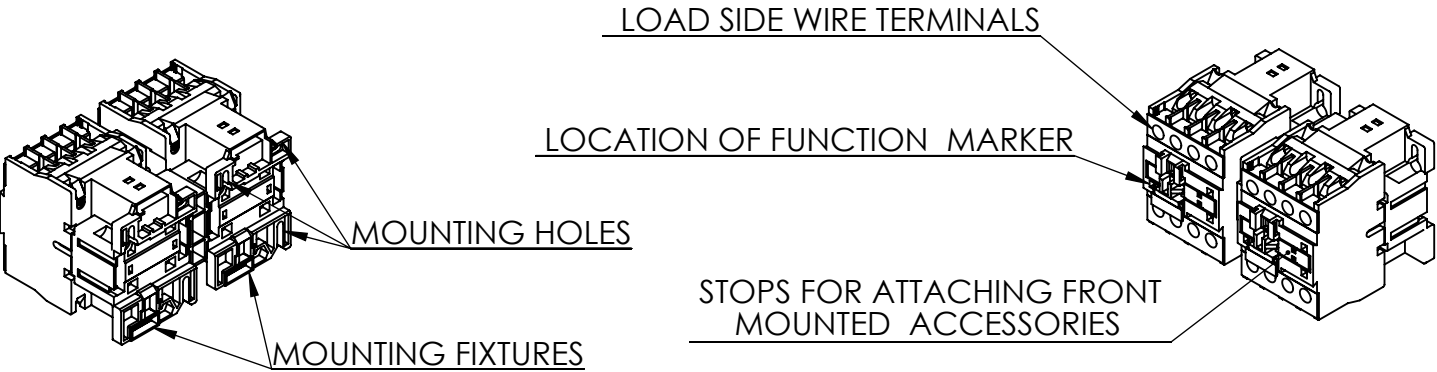

WWW.BRAHELECTRIC.COM, 855-355-2724

*NOTE: BRAH ELECTRIC CONTACTOR BLC2D2510-R7 IS AN AFTERMARKET DIRECT REPLACEMENT FOR LC2D2510-R7,LC2-D SERIES. SUITABLE FOR USE WITH LC2-D SERIES MOTOR CONTROL SYSTEMS

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED

ALL DIMENSIONS ARE IN INCHES
METRIC UNITS ARE DISPLAYED
BENEATH IN [MM.]

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
BRAH ELECTRIC. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF BRAH ELECTRIC
IS PROHIBITED.

MATERIAL
MOLDED PLASTIC CASE

FINISH
N/A

DO NOT SCALE DRAWING

BRAH
Electric

MAGNETIC CONTACTOR

SIZE **A** DWG. NO. BLC2D2510-R7 REV. **A**

SCALE:1:4 WEIGHT: 3.2 LBS SHEET 1 OF 1