




## PRODUCT DATA SHEET

CONTACT US

855.355.2724

Email - [sales@brahelectric.com](mailto:sales@brahelectric.com)

[www.brahelectric.com](http://www.brahelectric.com)

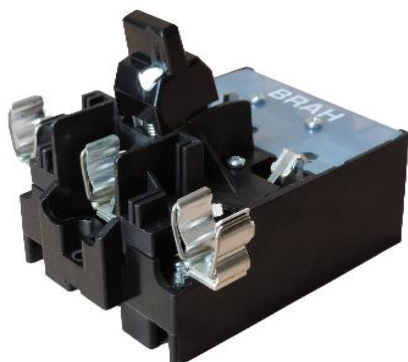

UL 98A Recognized component

File #: E503971

### **FCS206 - Floating Contact Switch**

Internal operating switch, floating contact design, rated 60 Amp 240 volt max, UL Recognized by BRAH Electric Mfg, heavy duty performance, designed specifically for use with all OEM General Electric MCC buckets, disconnects, QMR and THFP fusible switches and fusible bus plugs, substitute for OEM General Electric MR-60 switch, engineered to operate on 240 volt systems, 3 phase, 240 volt, 60 amp maximum

### **Product Specifications**

| Description        | Specs |
|--------------------|-------|
| Max Volts          | 240V  |
| Continuous Current | 60A   |
| No. of Phases      | 3     |
| No. of Poles       | 3,4   |
| Frequency          | 60HZ  |
| Max HP             | 15 HP |

### **Mechanical Data:**

#### **Over center Spring actuated Switch**

**Type:** Floating Contact Design, US patent # 10,141,125 B2

Installation requires removal of Clear Cover

**NOTE:** The BRAH Floating Contact switch is sold in other configurations please see additional options below.


### **Other Configurations include:**

| BRAH Part # | GE, OEM part # | VOLTAGE | AMPS | Horse Power |
|-------------|----------------|---------|------|-------------|
| FCS203      | MR-30          | 240V    | 30A  | 7.5 HP      |
| FCS603      | MR-30          | 600V    | 30A  | 20 HP       |
| FCS206      | MR-60          | 240V    | 60A  | 15 HP       |
| FCS606      | MR-60          | 600V    | 60A  | 50 HP       |
| FCS210      | MR-100         | 240V    | 100A | 30 HP       |
| FCS610      | MR-100         | 600V    | 100A | 75 HP       |





**Warranty:** All Products sold by BRAH Electric are guaranteed to be free of defect for a period of two years, under the condition that the product has been installed and operated properly. All items proven defective within the two year period will be replaced by BRAH Electric. We are not responsible for any consequential losses or damages outside of defective product as well as any replacements or repairs performed by another party without a written authorization from BRAH Electric.

# PRODUCT DIMENSIONS


| REVISIONS |      |             |      |          |
|-----------|------|-------------|------|----------|
| ZONE      | REV. | DESCRIPTION | DATE | APPROVED |

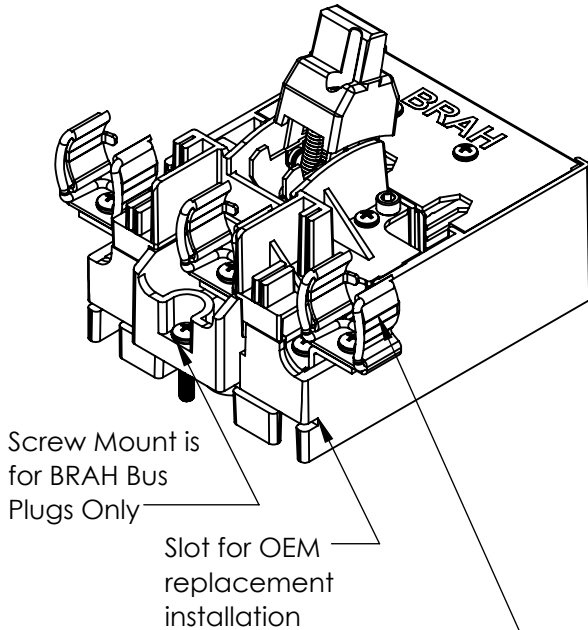

Note: Image is shown with 60A fuses.

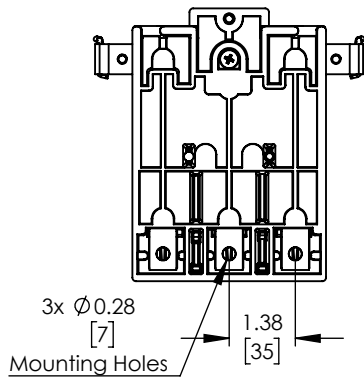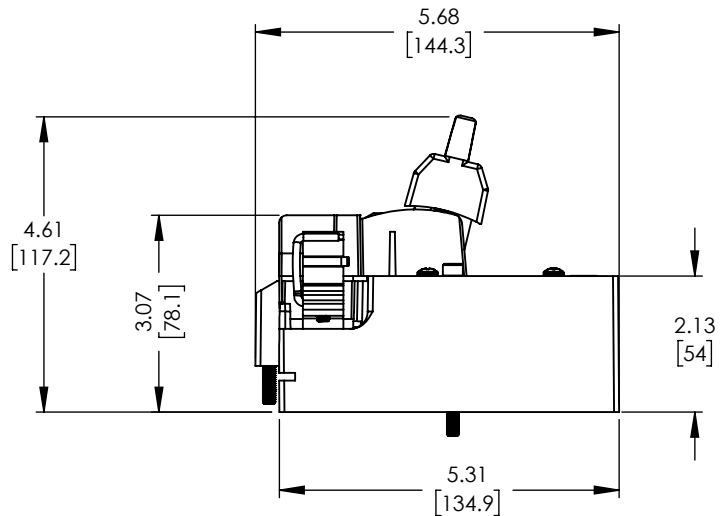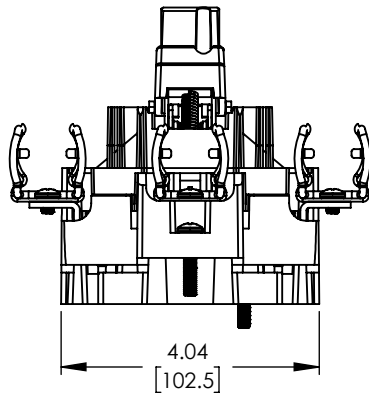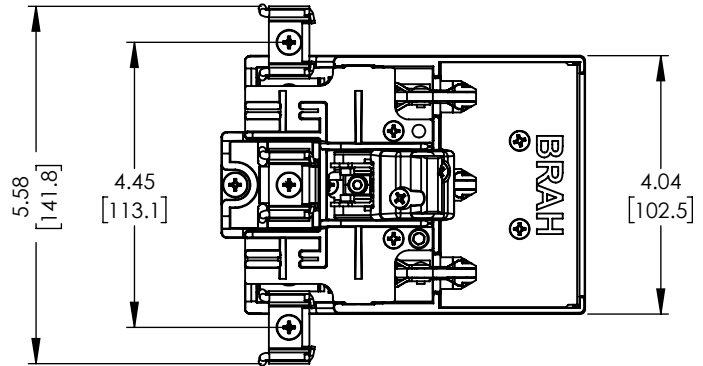

\* NOTE: BRAH Electric Mfg, heavy duty performance, designed specifically for use with all OEM General Electric MCC buckets, disconnects, QMR and THFP fusible switches and fusible bus plugs, substitute for OEM General Electric MR-60 switch, engineered to operate on 240 volt systems, 3 phase, 60A , 240V maximum

|                                                                                                                                                                                                                                          |                                                                                                                         |                                                                                       |               |              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|--------------|
|  <p>THIRD ANGLE PROJECTION</p>                                                                                                                        | <p>UNLESS OTHERWISE NOTED</p> <p>ALL DIMENSIONS ARE IN INCHES<br/>METRIC UNITS ARE DISPLAYED<br/>BENEATH IN [ MM. ]</p> |  |               |              |
|                                                                                                                                                                                                                                          | <p>MATERIAL<br/>MOLDED PLASTIC CASE</p> <p>FINISH</p> <p>DO NOT SCALE DRAWING</p>                                       | Floating Contact Switch, 60Amp                                                        |               |              |
| <p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.</p> | SIZE <b>A</b> DWG. NO. FCS206                                                                                           |                                                                                       | REV. <b>A</b> |              |
|                                                                                                                                                                                                                                          | SCALE: 1:4                                                                                                              |                                                                                       | WEIGHT:       | SHEET 1 OF 1 |