E-Mail: <u>Sales@brahelectric.com</u> www.Brahelectric.com

PRODUCT DATA SHEET



<u>PART NUMBER – BLC2D1810-B7</u>: BRAH Electric, aftermarket direct replacement contactors for Telemecanique LC2D1810-B7, TeSys D, direct substitute contactor, type LC2D, 3P, 3PH, 32A, 600V, 5HP @ 240V, 10HP @ 480V, 15HP @ 600V, complete with 24V AC coil, 1 N/O auxiliary contact, AC magnetic contactor suitable for use with LC2D series motor control systems

PRODUCT SPECIFICATIONS

MAGNETIC CONTACTOR PART NO. BLC2D1810-B7

Voltage Selection Chart


BLC2D18XX


BLC2D18	110/120 VAC
BLC2D1810	110/120 VAC
BLC2D1810-B6	24 VAC
BLC2D1810-B7	24 VAC
BLC2D1810-G6	110/120 VAC
BLC2D1810-G7	110/120 VAC
BLC2D1810-M6	220 VAC
BLC2D1810-M7	220 VAC
BLC2D1810-Q6	380 VAC
BLC2D1810-Q7	380 VAC
BLC2D18D10-R7	440 VAC
BLC2D1810-T6	480 VAC
BLC2D1810-U6	240 VAC
BLC2D1810-U7	240 VAC


TYPE	VALUE (UNITS)	NOTES	COMMENT
PHASE	3		
POLES	3		
VOLTAGE	600 (VAC)		
AMPERAGE	32 (A)		
COIL VOLTAGE MAX	24 (V)		
MIN HP. RATING	5 (HP)	@ 240V	
MAX HP. RATING	15 (HP)	@ 600V	

Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of one year, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

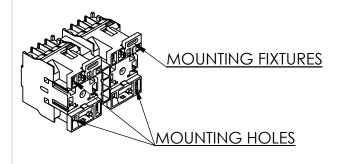

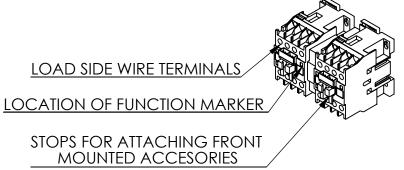

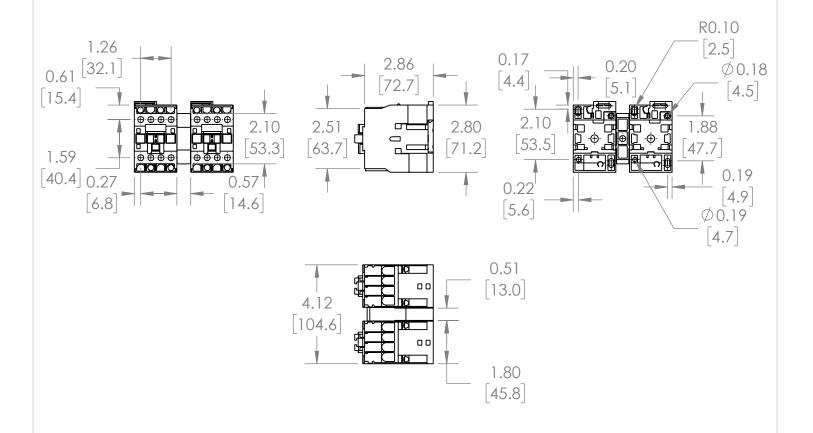

*NOTE: BRAH ELECTRIC
CONTACTOR BLC2D1810-B7
IS AN AFTERMARKET DIRECT
REPLACMENT FOR
LC2D1810-B7,LC2-D SERIES.
SUITABLE FOR USE WITH LC2-D
SERIES MOTOR CONTROL
SYSTEMS



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.

UNLESS OTHERWISE NOTED

ALL DIMENSIONS ARE IN INCHES METRIC UNITS ARE DISPLAYED BENEATH IN [MM.]

MATERIAL

MOLDED PLASTIC CASE

N/A

DO NOT SCALE DRAWING



MAGNETIC CONTACTOR

SIZE	DWG. I	BLC2D181	O-B7	AREV.
SCAL	E:1:4	WEIGHT: 3.2 LBS	SHEET 1 OF 1	