


Submittal

Job _____ Designer _____ Contact _____

Snow Sensor 095

The Snow Sensor 095 is an aerial mounted sensor that detects falling snow and allows a tekmar® Snow Melt Control to automatically start the snow melting equipment. System stop is provided by the control's timer or by manual disable. The 095 mounts to a nominal 1/2" (16 mm) metal or PVC conduit or pole. The 095 is well suited for adding automatic start to an existing snow melt system.

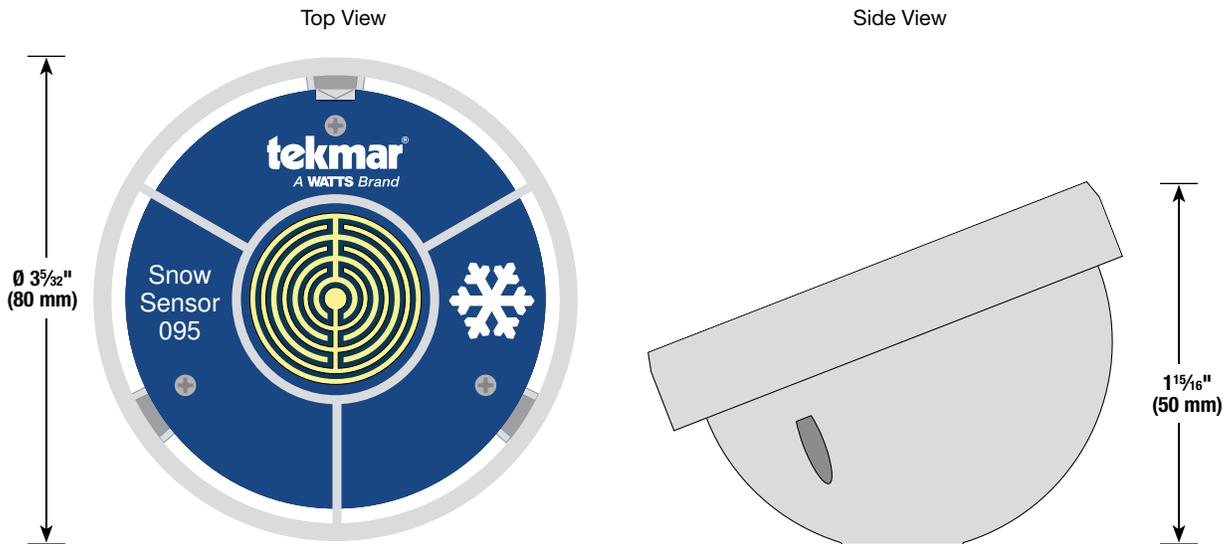

Specifications

Snow Sensor 095 Aerial Mounting	
Literature	095_C, 095_D
Packaged weight	0.4 lbs (180 g)
Dimensions	1 15/16" H x 3 5/32" O.D. (50 H x 80 O.D. mm)
Enclosure	White PVC plastic, UV stable, NEMA type 1
Operating range	-40 to 122°F (-40 to 50°C)
Compatible equipment	tekmar Snow Melting Control 654, 670, 671, 680, 681
Warranty	Limited 3 Year (See 095_D for full warranty)

Energy Saving Features

- Automatic snow detection

Additional Features

- UV Resistant
- Mounts to 1/2" Metal or PVC Conduit

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

SPECIAL REQUIREMENTS

This sensor must be used with a tekmar Snow Melting Control 654, 670, 671, 680, or 681.

tekmar[®]
A WATTS Brand