

# **Current Transducer LT 4000-S**

For the electronic measurement of currents: DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).







#### \_

**Electrical data** 

I <sub>PN</sub> I <sub>P</sub> R <sub>M</sub>	Primary nominal r.m.s. current Primary current, measuring range Measuring resistance		$4000$ $0 \pm 6000$ $R_{M  min}$ $R_{M  max}$		A A
	with ± 24 V	@ $\pm 4000  A_{max}$ @ $\pm 6000  A_{max}$	0 0	10 2	$\Omega$
I <sub>SN</sub> K <sub>N</sub> V <sub>C</sub> I <sub>C</sub> V <sub>d</sub>	Secondary nominal r.m.s. current Conversion ratio Supply voltage (±5%) Current consumption R.m.s. voltage for AC isolation test, 50 Hz, 1 mn		800 1:500 ±24 35(@±		mA V s mA kV

# Accuracy - Dynamic performance data

$\overset{{f x}_{\scriptscriptstyle G}}{e}_{\scriptscriptstyle L}$	Overall accuracy @ $I_{PN}$ , $T_A = 25$ °C Linearity		± 0.5 < 0.1		% %
I <sub>о</sub> I <sub>от</sub>	Offset current @ $\mathbf{I}_{p} = 0$ , $\mathbf{T}_{A} = 25^{\circ}\text{C}$ Thermal drift of $\mathbf{I}_{O}$	- 25°C + 70°C	Тур ± 0.6	Max ± 0.8 ± 0.8	m A m A
t <sub>,</sub> di/dt f	Response time $^{1)}$ @ 90 % of $I_{P max}$ di/dt accurately followed Frequency bandwidth (- 1 dB)		< 1 > 50 DC 1	100	μs Α/μs kHz

#### **General data**

$T_A$	Ambient operating temperature	- 25 + 70	°C	
T <sub>s</sub>	Ambient storage temperature	- 40 + 85	°C	
$\mathbf{R}_{s}$	Secondary coil resistance @ T <sub>A</sub> = 70°C	15	Ω	
m	Mass	6	kg	
	Standards	EN 50178: 19	EN 50178: 1997	

 $I_{DN} = 4000 A$ 



#### **Features**

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

## **Advantages**

- Excellent accuracy
- · Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- · Current overload capability.

#### **Applications**


- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Note:  $^{1)}$  With a di/dt of 100 A/ $\mu$ s.

070706/9



# **Dimensions LT 4000-S** (in mm. 1 mm = 0.0394 inch)

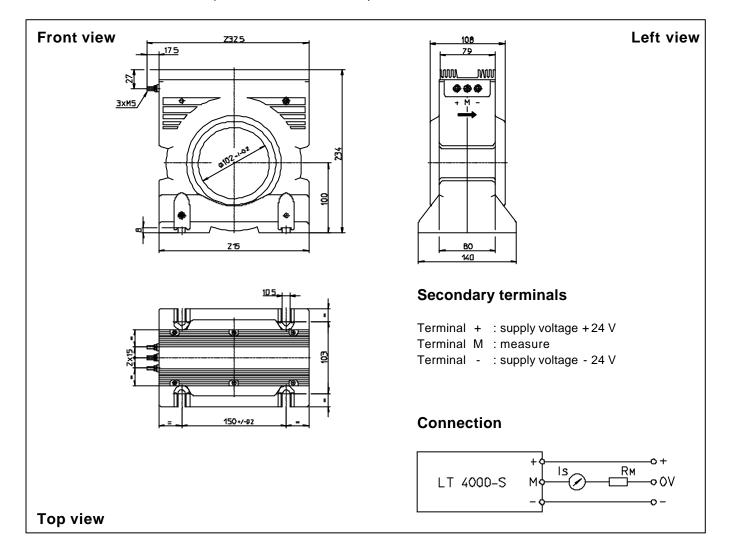

## **Mechanical characteristics**

- General tolerance
- Fastening
- Primary through-hole
- Connection of secondary fastening torque
- ± 1.0 mm
- 4 holes Ø 10.5 mm Ø 102 mm
- M5 threaded studs 2.2 Nm

## Remarks

- I<sub>s</sub> is positive when I<sub>p</sub> flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.