


CromeCap 100 cv910W

Simple, Plug & Play Lecture Capturing

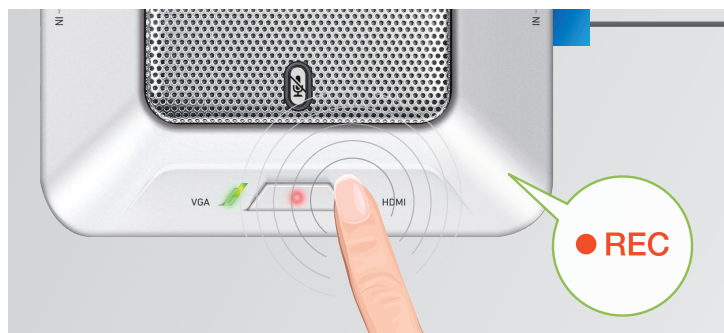

Quick and Simple

Simply connect your computer via HDMI or VGA, press the record button, and your entire lesson will be recorded and ready to share.




No Complicated Software

Since the CromeCap 100 combines all video and audio into one file on an SD card in the unit, there is no complicated video editing or capture software needed to produce full, rich lessons.



Noise Canceling Technology


The integrated microphone includes noise cancelling technology to effectively capture the teacher's voice, and reduce irrelevant background noises for clear, smooth audio.

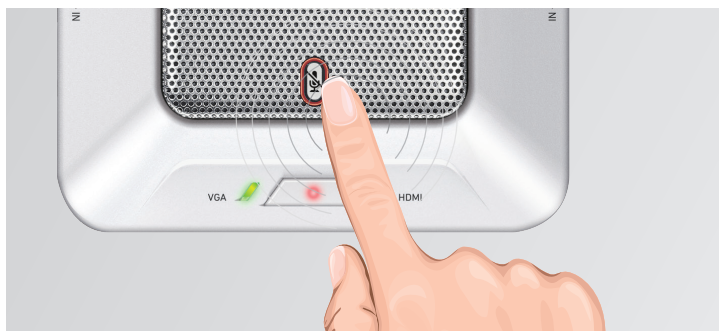

Convenient Mute Control

One-touch mute control allows the teacher to mute the microphone while other audio is playing, or side conversations are taking place to maintain privacy.

Connection Diagram

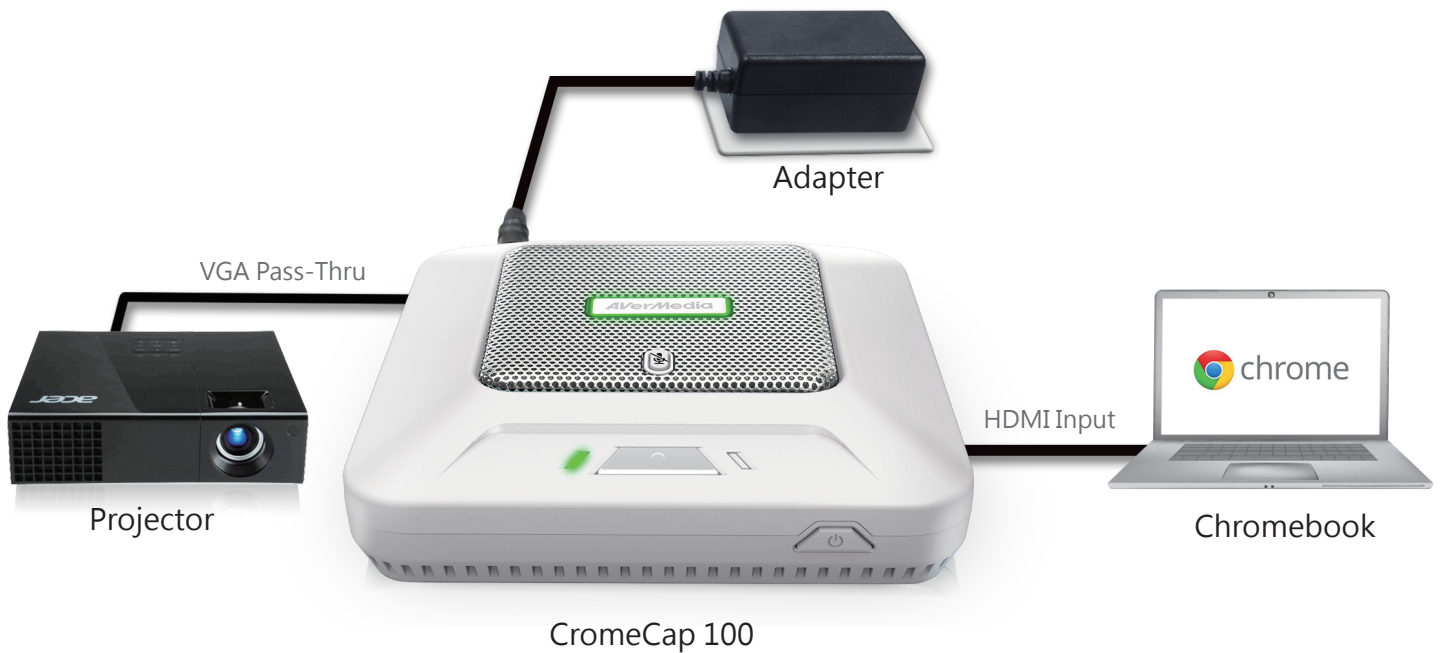

Dashboard

It's a utility for adjusting settings by your usage scenarios.

Large Space:
40 people, 100m²

Medium Space:
15 people, 36m²

Small Space:
5 people, 4m²

Best Quality:
13m/GB, 10Mbps

Standard Quality:
22m/GB, 6Mbps

Low Quality:
68m/GB, 2Mbps

Specification

| | |
|---------------------------|---------------------------------------------------------------------------------|
| Interface | USB 2.0 (mini USB) |
| Video Input/Output | Digital:HDMI Analog:VGA |
| Storage | SD card: SDHC Class 10 (FAT32) |
| Resolution | Input & Pass-thru: 1920x1080 @ 60p (max) Record: 10Mbps@ 1080p30 (max) |
| Media Players (Suggested) | VLC Media Player |
| Microphone | Omnidirectional |
| Audio Input/Output | Digital: HDMI Analog: 3.5mm Audio |
| Recording Format | TS |
| Audio Record | Input: HDMI: PCM Stereo 3.5mm Audio: Stereo Record: AAC Stereo |
| Chroma Subsampling | Input & Pass-through: YUV: 4:4:4 Record: YUV: 4:2:0 |

*Please visit AVerMedia official website for the latest information.

