### **FUSION® SERIES**

# **FEATURES**

1 CONTROLZONE™ LEVELING
Industry-first feature allows post-installation fine tuning of height and leveling.

2 CENTERLESS™ SHIFT

Provides up to 17.5" (445 mm) of postinstallation lateral shift - 8.75"(225 mm)

left/right of uprights - for limitless
centering capabilities.

GLICKCONNECT\*

Hear an audible click when the screen safely engages with the mount. A built-in cable stand provides easy access under the screen.

4 CUSTOMIZABLE ACCESSORY SYSTEM
A full line of supporting accessories can be integrated with the mount, extending the same adjustment benefits to the entire configuration.

MULTIPLE INSTALLATION OPTIONS
Can be installed on 12" (305 mm) on-centers
up to 32" (813 mm).

## SPECIFICATIONS

Depth from Wall	1.96" (50 mm)
Max Lateral Shift	17.5" (445 mm)
Dimensions (HxWxD)	16.5 x 34.44 x 1.96" (419 x 875 x 50 mm)
Max Mounting Pattern (H,W)	19.88" (505 mm) 34.25" (870 mm)
Weight Capacity	200 lbs (90.7 kg)
Color	Black



## WHAT YOU NEED TO KNOW

#### **OTHER PRODUCT OPTIONS**



FUSION Series Wall Mount

- For TVs 37-63"



#### RLF2

 $\mathsf{FIT}^{\scriptscriptstyle{\mathsf{T}}} \, \mathsf{Series} \, \, \mathsf{Low\text{-}Profile} \, \, \mathsf{Hinge} \, \, \mathsf{Mount} \,$ 

- For TVs 32-52"




#### RXF2

 $\mathsf{FIT}^{\scriptscriptstyle{\mathsf{T}}}$  Series Low-Profile Hinge Mount

- For TVs 40-63"

## TECHNICAL DRAWINGS

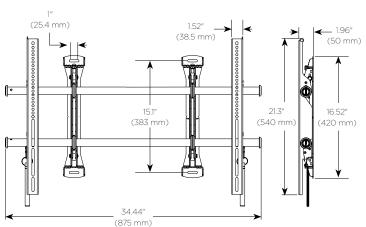

## RECOMMENDED ACCESSORIES



**FVS250** ■ 12" Video Conferencing Shelf - above



FCS100 ■ Single Component Shelf - below



FLR100 Left/Right Speaker Adapter

For a complete list of FUSION accessories see pages 86 - 88.

