# Fact Shee

PAS I Audio System







Dream Systems Award Winner PC Computing, March 1998

160 Hottest Products

Sponsor of the Goldmine Software Sales Force Automation Tour

# Award Winning Presentation Audio For Multimedia & Voice Support

## PAS I Audio System

North America Use Only

- Patented design creates the perfect sound for the perfect presentation in a covenient carry case
- Lightweight and portable
- Connects easily to any projector, portable computer, iPOD, or DVD/VCR player
- Long list of options allow user configuration to specific audiences, source material or rooms
- Satellites can be used independently of the subwoofer as long as separate wall mount or desktop power supply is used (Wall mount power supply (FW-PS12W) and desktop power supply (FW-PS12D) are sold separately)
- Detach speaker satellites from the subwoofer for smaller audiences or ultra portability. Attach the subwoofer for those presentations requiring twice the sound or low-end frequency boost
- Convenient desktop volume control adjusts the sound for both satellites and subwoofer simultaneously
- Hardwired for use in North America and requires a 110 volt outlet for power



### **PAS I Specifications**

#### Satellites

#### Drivers

One 2" full range per satellite One 2.5" passive radiator (PASII)

#### Frequency Response

100 Hz – 18 kHz @ -10 dB 150 Hz – 17 kHz @ -3 dB

#### Power

12 watt @ 10% 10 watt @ 1%

Crossover Frequency with Subwoofer

Crossover Frequency without Subwoofer 100 Hz

#### Subwoofer

**Drivers**One 4.5" long throw woofer One 5.25" passive radiator

#### Frequency Response

47 Hz - 400 Hz @ -10 dB 60 Hz - 200 Hz @ -3 dB

#### Power

20 watt @ 10% THD 15 watt @ 1% THD

#### Crossover Frequency

200 Hz Linkwitz-Riley

#### PAS I

110-120 volt AC = 50/60 Hz USA

#### **Power Requirements**

#### Input Impedance


Signal-to-Noise Ratio




205 Westwood Ave. Long Branch, NJ 07740 866-94-BOARDS(26273) (732)-222-1511

Fax: (732)-222-7088 sales@touchboards.com


# **Room Arrangements For PAS Setup**

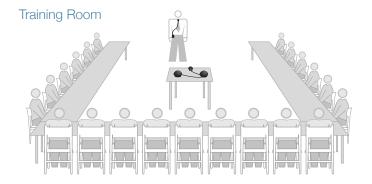


#### Auditorium




#### Conference Room

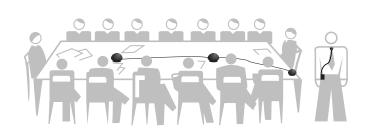

## Church

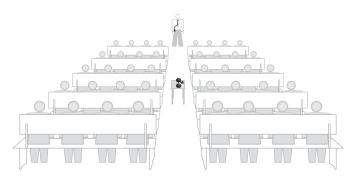

#### Classroom

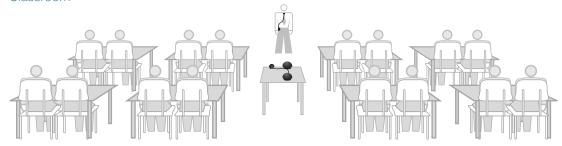

# **Ordering Information**

Presentation Audio System I (PAS I - Port)



Presentation Audio System I 3 Piece System (incl. subwoofer) (PAS I-AVD-CC)



#### Options:



Desktop Power Supply (FW-PS12D)

