

HDNET-4P

AUTOMATICALLY SWITCH BETWEEN UP TO FOUR HDMI DEVICES On one HDMI DISPLAY

HDMI FOUR PORT AUTOMATIC SWITCH

4 Port HDMI Automatic Switch

The HDNET-4P allows you to automatically switch up to four HDMI sources on one display screen

With SmartAVI's HDNET-4P it is now possible to connect up to four HDMI devices to one display screen for easy switching between sources. Transmit high definition sources such as BluRay players, gaming consoles, computers or cable receivers effortlessly while viewing on a single HDTV monitor.

The HDNet-4P offers an automatic switching mode, and when configured as an automatic switcher, it has the ability to switch to a selectable secondary input upon powering off of the primary input. HDNet-4P will automatically switch to the next device when the higher input is powered off. This allows the user to control multiple devices with the HDNet-4P.


FEATURES:

- RS232 switching control
- IR switching control
- Front panel switching control
- EDID learning of any monitor
- Maintains 480p, 720p, 1080i and 1080p video formats
- Supports HDMI 1.3 digital audio format, LPCM/Dolby-AC3/ DTS7.1/DSD
- ATC & HDCP compliant
- Connect four HDMI components to one HDTV monitor
- Supports DVI-D

APPLICATIONS:

- Restaurants
- Board/Conference Rooms
- Resorts
- Lounges
- Civic Centers
- Retail Locations
- Meeting Halls
- Theaters
- Schools/Universities
- Control Rooms



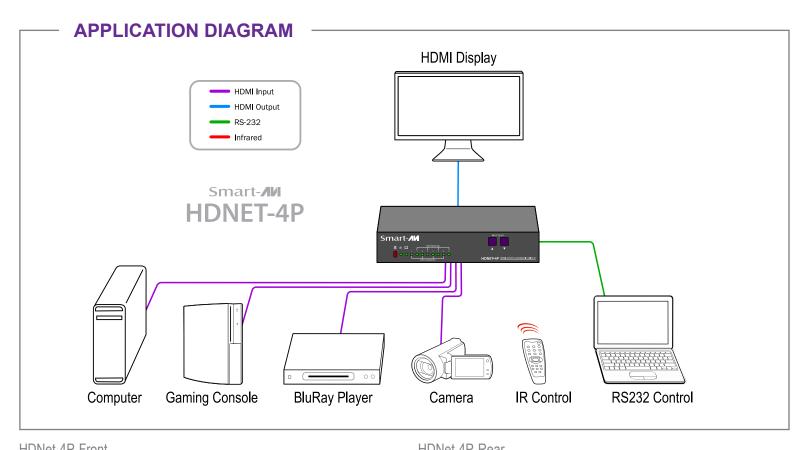

HDNet-4P Front



Пι	JΙV	eı-	41	Real	



VIDEO	
Video Amplifier Bandwidth	1.65 Gbps
Input Video Signal	1.2 volts
Input DDC Signal	5 volts
Single Link Range	1080p
HDMI Connector	HDMI Type A 19 pin female

CONTROL				
Direct	2 front panel buttons			
IR	3.5mm connector with 38khz			
RS232	Female DB9 @ 9600bps			
OTHER				
Power Requirements	5V DC			
Dimensions	9.1" W x 1.75" H x 2.5" D			
Weight	2.5 lbs.			

ORDERING INFORMATION			
Part No.	Description		
HDNET-4PS	HDMI 4x1 Automatic Switch. Includes: [HDNET-4P & (PS5VDC-2A)]		

