




FX-8804

SMD HOT TWEEZERS

The **HAKKO FX-8804 SMD Hot Tweezer** delivers direct heat to the component, preventing damage to surrounding components on dense boards. Easily removes SMD chips and flat packs up to 25mm. Compatible only with the HAKKO FX-888/FX-888D and FX-889 soldering stations.

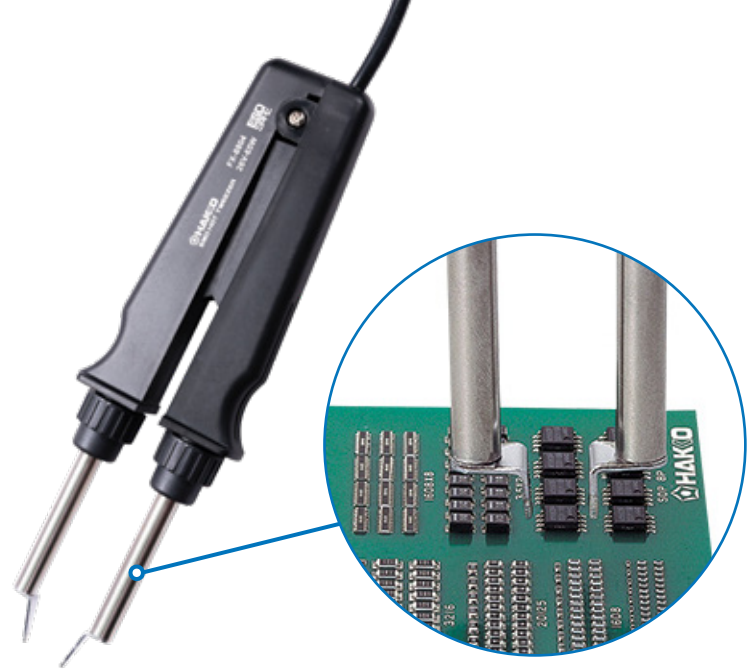

FEATURES & BENEFITS

- Direct heating - less effect upon surrounding components on crowded boards
- Easily removes SMD chips and flat packs up to 25 mm
- The collet allows easy replacement of the tips
- Specially designed tool allows easy and precise tip alignment



SPECIFICATIONS For Part No. FX8804-02 (Handpiece Only)

Station Compatibility	FX-888/FX-888D see page 45 & FX-889 see page 46
Tip Series	950 Series Tips see below
Power Consumption	65 W
Temperature Range	392 °F - 750 °F / 200 °C - 400 °C
Tip to Ground Resistance	< 2 Ω
Leak Voltage	2 mV
Heating Element	Ceramic heater



CONTENTS For Part No. FX8804-CK (Hot Tweezers & Holder included)

Part No.	Description
FX8804-02	SMD hot tweezer
FH800-04BY	Holder with cleaning sponge A1559
B2300	Heat resistant pad
A1378 (2mm)	One set of tips



TIPS For Part No. FX8804-02

	Size A [B] x W	Part No.	Description
CHIP	0.10 x 0.04 in. / 2.6 x 1.0 mm	A1576	Tip/Chip 2.6C
	1.5 [0.5] x 1.0 mm / 0.06 [0.02] x 0.04 in.	A1388	Tip/Chip 0.5C
	0.02 x 0.04 in. / 0.5 x 1.0 mm	A1577	Tip/Chip 0.5L
	0.04 x 0.04 in. / 1.0 x 1.0 mm	A1379	Tip/Chip 1L
	0.08 x 0.04 in. / 2.0 x 1.0 mm	A1378	Tip/Chip 2L
	R0.01 in. / R0.25 mm	A1389	Tip/Chip 0.5I
SOP	0.16 x 0.04 in. / 4 x 1.0 mm	A1390	Tip/SOP 4L
	0.24 x 0.04 in. / 6 x 1.0 mm	A1391	Tip/SOP 6L
	0.31 x 0.04 in. / 8.0 x 1.0 mm	A1380	Tip/SOP 8L
	0.39 x 0.04 in. / 10.0 x 1.0 mm	A1381	Tip/SOP 10L
	0.51 x 0.04 in. / 13.0 x 1.0 mm	A1382	Tip/SOP 13L
	0.59 x 0.04 in. / 15.0 x 1.0 mm	A132	Tip/SOP 15L
	0.71 x 0.04 in. / 18.0 x 1.0 mm	A1383	TIP/SOP 18L
	0.79 x 0.04 in. / 20.0 x 1.0 mm	A1384	Tip/SOP 20L
	0.98 x 0.04 in. / 25.0 x 1.0 mm	A1385	Tip/SOP 25L

REWORK



**FX8804-CK
IRON HOLDER
CONVERSION KIT**
Includes everything shown in picture.

HEAT RESISTANT PAD
P/N: B2300

A1378* TIPS
P/N: A1378
**Included*

SMD HOT TWEEZERS
P/N: FX8804-02

IRON HOLDER W/CLEANING SPONGE
P/N: FH800-04BY

