

JBC

www.jbctools.com

INSTRUCTION MANUAL



CL6217

Metal Brush

This manual corresponds to the following reference:

CL6217

Packing List

The following items are included:




Metal Brush 4 units

Manual 1 unit

Ref. 0027085

Metal Brush replacement in Compact Stations *

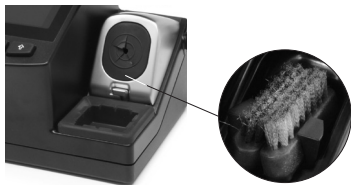

* **Note:** To join 2 brushes the connection clip is needed. Ref. CL 6217 does not include any clip. Reuse the clip of your worn brushes.

The replacement Ref. CL6220 instead carries the clip built.


As replacement for CP-A and CF-A there is no connection clip needed.

Metal Brush replacement in CL8499 *

1. Unlock



2. Remove and replace



CL8499 ESD Tip Cleaner

Improve thermal transfer by cleaning the tip after each solder joint.

Brass Wool


Ref. CL6210

Splashguard

Ref. 0017576

Antisplash Membrane

Ref. 0017574



Sponge

Ref. S0354

ESD Tip Wiper

Ref. CL0240

Optional

Inox Wool

Ref. CL6205



Brushes

Ref. CL6220



Tip Tinner

Ref. TT-A



Specifications

- | | |
|--|--|
| - Total Net Weight: | 16.9 gr / 0.037 lb |
| - Total Package Dimensions:
(L x W x H) | 90 x 55 x 40 mm
3.54 x 2.17 x 1.57 in |
| - Total Package Weight: | 18.1 gr / 0.04 lb |

Complies with CE standards
ESD protected

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.



www.jbctools.com