

MA-101G 5.8 GHz Personal Wireless PA

Key Features

- 5.8 GHz true diversity receiver module with 10 auto-scannable frequencies. One-touch Scan & Sync (ACT) button for fast and easy channel setup.
- 50W Class-D amplifier to power a 5" full-range driver.
- Built-in high-efficiency active antennas prevent accidental antenna breakage and ensure improved reception distance and stable signal quality.
- The mixed output of wired mic and wireless mic.
- 3.5 mm line input accepts external iPod, MP3/CD/DVD player or laptop.
- Built-in Bluetooth to connect mobile devices for music streaming.
- ID code setting to prevent the interference from the same operating channel and increase compatible channels at the same venue.
- External AC switching power supply for fast battery charge. Built-in high capacity lithium battery provides the amplifier complete operation without AC power.
- 4-hour full charge for 10-hour stand by time.
- A 4-level battery indicator for monitoring the battery level and charging state.



Transmitters & Microphones


ACT-58H	Handheld Transmitter
ACT-58HC	Rechargeable Handheld Transmitter
ACT-58T	Bodypack Transmitter
ACT-58TC	Rechargeable Bodypack Transmitter
MM-107	Supercardioid Dynamic Microphone

Accessories

MB-25	Lithium-ion Rechargeable Battery (14.8 V / 2.6 AH)
SC-10	Storage and Carry Bag
MS-30	Tripod Microphone Stand

Technical Specifications

Power Output	Class D, 56 W max.
Loudspeaker	5" full-range
Receiver	ISM 5.8 GHz × 1
Audio Inputs	Ø 6.3 mm Mic In × 1, Ø 6.3 mm Line In × 1
Audio Output	Ø 3.5 mm Line Out × 1
Audio Player	Bluetooth
Installation	Shoulder-strapped, hand-carried and mounted on a stand.
Power Supply	Built-in 14.8V/ 2.6A lithium battery. External DC power supply
Dimensions	160 × 178 × 285 mm (W×H×D)
Weight (battery included)	Approx. 2.2 kg (battery included)

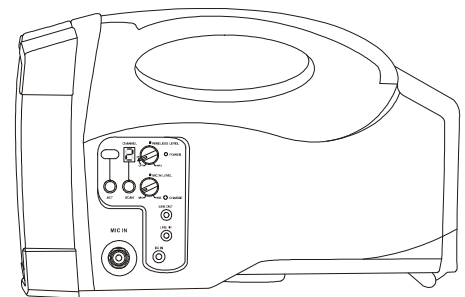

MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw