




Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

## Extension Adapter Plates for 40" to 65" Flat Panels

Model: UFP-1065

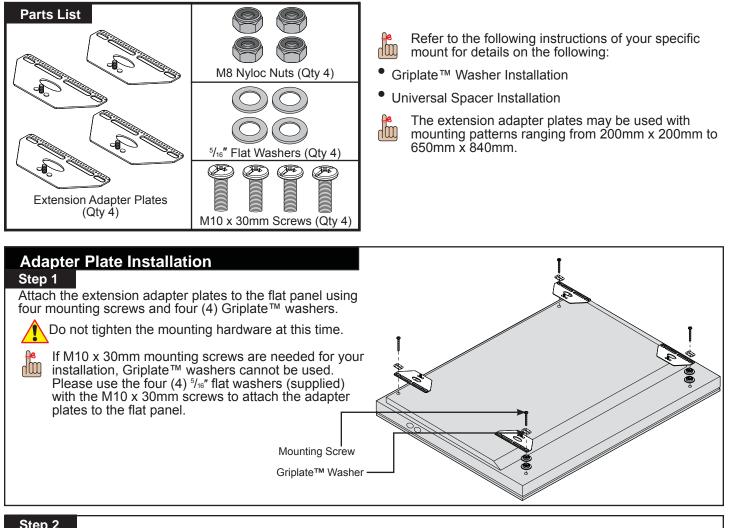


## Step 2

- Place the universal bracket arms over the threaded 1) mounting studs that are on the adapter plate.
- Place one (1) <sup>5</sup>/<sub>16</sub>" washer and one (1) M8 nyloc nut 2) on each threaded mount stud.
- 3) Use a socket wrench and <sup>1</sup>/<sub>2</sub>" socket to tighten all M8 nyloc nuts.
- 4) Use a screwdriver and tighten the mounting screws.

Do not overtighten the mounting screws.

Make certain that the two alignment stubs on each daa adapter plate are properly seated in the universal bracket slots. The alignment stubs help keep the universal bracket assembly aligned and level during installation.

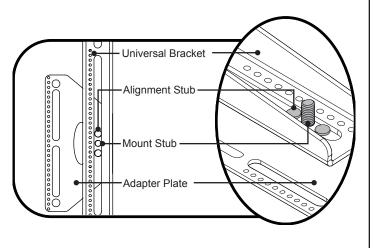

9531-005-011-01