PUREX
INCORPORATED

The Future of Fume Extraction

FEATURES

• Clear & informative graphic display

• Highest grade HEPA and carbon technology

• Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks

• Gas and particle sensors to warn the operator

• Adjustable airflow

SPECIFICATIONS

| Voltage	120v	230v
Part Number	0LX3002	0LX3003
Wattage	1.2kW	1.2kW
Frequency	50Hz / 60Hz	50Hz / 60Hz
Cabinet Height	885mm	885mm
Cabinet Width	455mm	455mm
Cabinet Depth	517mm	517mm
Cabinet Weight	50kg	50kg
Sound Level	<60dBa	<60dBa
Airflow	330m3/h	360m3/h

INCLUDED AS STANDARD...

FILTERS

Main Filter
Code
113505

Description
HEPA/Chemical

Pre-filter
Code
111085

Description
F6 Labyrinth

CONNECTION KIT

Connection kit is included see overleaf for options

Find out more:

🌐 **www.purexinc.com**

✉ **sales@purexinc.com**

📞 **+1 847 348 5203**

Machine Supplied With • 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

OPTIONS

Main Filter

Code:	Description:
113505H	HEPA/Chemical (Hydrophobic)
113579	HEPA/Twin Chemical
113668	HEPA/Twin Chemical
113512	HEPA/Chemical (Cleanroom)
113669	HEPA/Chemical (Cleanroom)
113508	Chemical
113809	HEPA
113513	Solvent Lock

Main Filter

Code:	Description:
113662	Chemical Special
113505P	Chemical Special
113531	Pleated Bag

Pre-filter

Code:	Description:
111095	F8/F9 Labyrinth

Connection Kits

	Hose End Diameter	Hose Length	Purex Inlet Diameter

Code: 100032 — 50mm — 3m — 80mm

Connect to 50mm diameter pipe/port or Purex valve

3.0m

Code: 120299 — 80mm — 3m — 80mm

Connect to 80mm diameter pipe/port

3.0m

Code: 120288 — 100mm — 2.3m — 80mm

Connect to 100mm diameter pipe/port

0.3m   2.0m
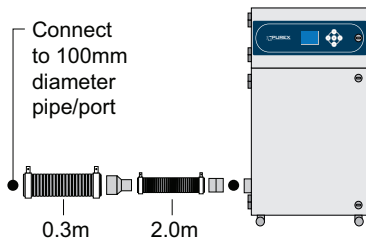
Code: 120289 — 150mm — 3.3m — 80mm

Connect to 150mm diameter pipe/port

0.3m   0.3m   3.0m
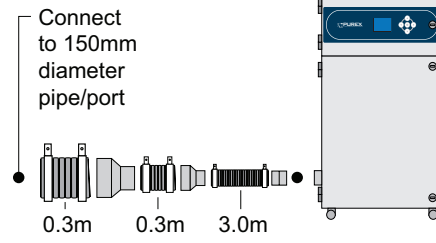
If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing

Your Machine — 10011010 — Extractor — 10011010

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options

purex
INCORPORATED