

MASTHEAD AMPLIFIER + PSU

LTE 700 READY

REF.	DESCRIPTION	EAN 13
536080	KIT: AMP. MAST 2I/1O + PSU 12V 110Vac UL	8424450185629
536081	KIT: AMP. MAST 3I/1O + PSU 12V 110Vac UL	8424450185643



+ Two and three-input amplification kits for individual MATV installations with LTE/4G 700MHz rejection.

- High output level
- Switch DC pass
- EasyF coaxial plug
- Zamak die cast
- High efficiency switched-mode power supply


i

REF.	in	lb	Units/Packing
536080	6.23 x 5.9 x 4.13	1.69	1 / box
536081			


📄

Ref.Nr.	536020 (Amp. in 536080)			536021 (Amp. in 536081)		
Inputs	UHF1	UHF2/BIII/DAB		UHF1	UHF2	BIII/DAB
Band	MHz	470-698	470-698 174-254	470-698	470-698	174-254
Gain	dB	26		26		26
Gain adjust	dB	0...18	0...18 0...18	0...18	0...18	0...18
Output Level (DIN45004B)	dBm	54		54		50
N.F.	dB	8		8		10
D.C. Out	Vdc/mA	12 / 100			12 / 100	
D.C. Pass	mA	45	45	45	-	-
IP		23				
Dimensions	in	4.72 x 5.12 x 1.57				


Ref.Nr.	550104 (PSU in 536080 and 536081)	
Freq.Margin	MHz	5...862
Through loss	dB	1Out Main: 4.5 / Aux: -
		2 Out Main: 4 / Aux: 4
Output Voltage	Vdc	12 ± 1.5
Máx. Output current	mA	220
Mains voltage	Vac/Hz	108...132 / 50...60
IP		20
Dimensions	in	5.7 x 1.77 x 1.38

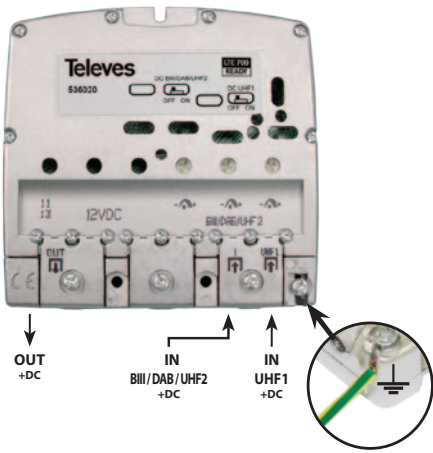


REF. 536020 (536080)

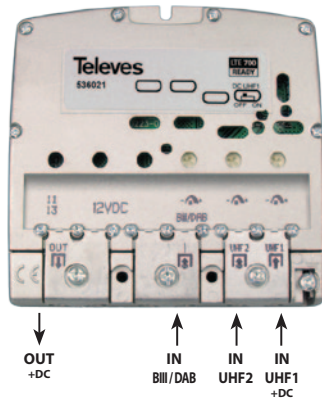

REF. 536021 (536081)

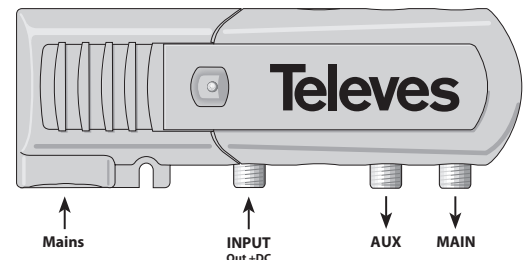

REF. 550104 (536080 / 536081)

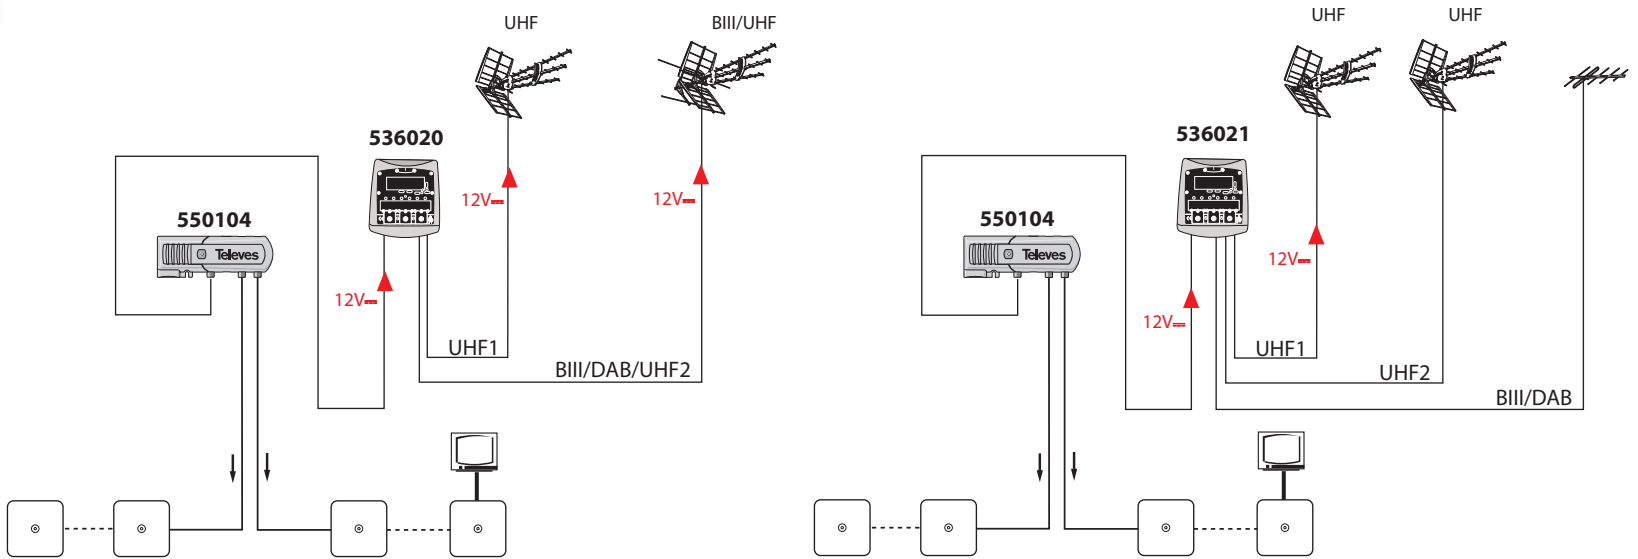

REF. 536080

REF. 536081