



NovoConnect B360

Wireless Presentation & Collaboration System


Quick Start Guide




205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



Package Contents



(a) NovoConnect B360 main unit




(b) Micro-HDMI-to-HDMI cable



(c) Micro-USB-to-USB power cable




(d) USB power adapter



(e) NovoConnect mount

Your NovoConnect B360

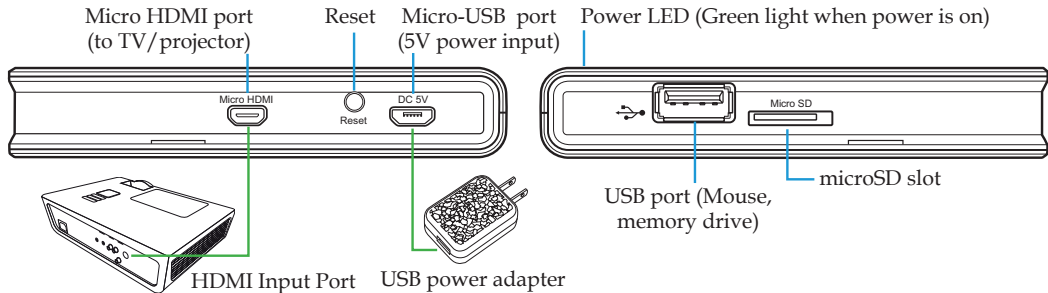

Connecting Your B360

1. **Video/Audio connection:** Connect the Micro HDMI port to the TV/projector's HDMI input port using the Micro-HDMI-to-HDMI cable (item (b) in "Package Contents").
2. **Power input:** Connect the Micro-USB port to the power source using the Micro-USB-to-USB power cable and the USB power adapter (items (c) and (d) in "Package Contents").

Note: Throughout this manual, your NovoConnect B360 will be referred to as B360.

Note: You may connect an optional USB mouse or memory drive to the USB port.

Note: The microSD slot supports microSD cards up to 32 GB, FAT32 and NTFS file types.

Software Download and Installation



Your B360 will power up and show the NovoConnect home screen (as shown on this page) once it is properly connected. Follow the on-screen steps to connect wirelessly to your B360 and download the presentation software for your device:

4 Select the Application Edition (optional)

Connect a USB mouse to your B360. Click the on-screen edition display area to set your NovoConnect to either Education Edition or Enterprise Edition.

1 Wi-Fi

Enable Wi-Fi on the computer. Search for and connect to the SSID shown in this step (e.g. NVC_39FC7). The default Wi-Fi mode is Hotspot Mode for your B360.

2 Installation

Windows/Mac Users: Enter the URL into a web browser and follow the instructions on the next page.

iPad/Android Users: Follow the instructions on the next page.

3 Connect

Windows/Mac Users: Launch the installed NovoConnect Desktop Streamer software and enter the URL (and PIN if required) shown in this step.

iPad/Android Devices: Scan the QR code on the bottom right corner of the NovoConnect screen or manually configure the SSID into your tablet and enter the IP address into your NovoPresenter and connect.

Software Download and Installation (continued)

For Windows and Mac computers

Once you have opened the webpage from your B360 home screen (for example, <http://192.168.43.1:8080> in the sample home screen), select an OS type and follow the instructions on the web page to download and install the NovoConnect Desktop Streamer software.

For Android and iOS tablets

Download and install the App “NovoPresenter” from Google Play or iOS App Store. After installation, you can find the NovoPresenter icon on your tablet.


For direct download of the B360 Quick Start Guide

Open a web browser and enter the URL shown on your B360’s home screen (for example, <http://192.168.43.1:8080>). From the drop-down menu, select the quick start guide download option and click/touch the **Download** button.




Managing a Presentation


Launching a Presentation

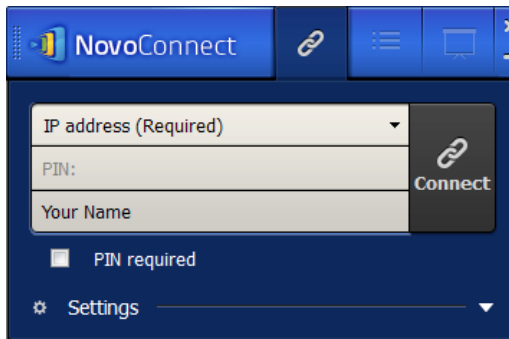


After the software installation you will find the following presentation software on the desktop of your PC, Mac or tablet.



Start the application to launch the control panel (shown on the left). Follow the steps below to start or join a presentation group:



1. **IP address** Enter the IP address shown on the **(Required):** NovoConnect home screen.
2. **PIN** Check the “PIN required” box and **(optional):** enter PIN if needed.
3. **Your Name** Type in your name which will be **(optional):** displayed to other members of your presentation group.
4. Click  to start or join the presentation group.

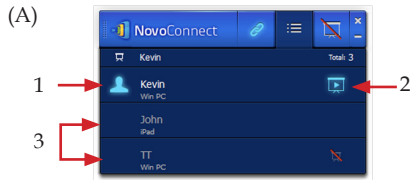
Managing a Presentation (continued)



Roles in a Presentation Session

Click on the list tab. This will display all participants in your presentation group. The role of each participant is indicated by the graphic symbols shown below.


1. *Host* 
2. *Presenter* 
3. *Participant*

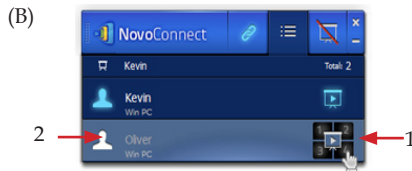

Assigning Roles

Move the cursor over a participant entry to change the role of a participant:

1. The *host* assigns a *participant* as a *presenter*.
2. The *host* assigns a *participant* as the *new host*.

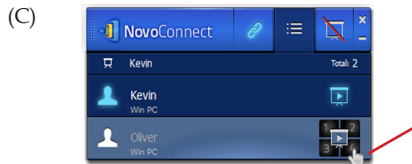


4-Way Split Screen Presentation





Click the numbered box 1-4 to assign a *presenter's* on-screen display to screen #1-#4. Click the center box to assign a *presenter's* on-screen display to full screen.

Managing a Presentation (continued)

(D)




Screen Preview


1. Only the *host* can preview a *participant's* screen.
2. The participant denies or allows screen preview by toggling the button from  to  (as seen below).



Note: When your B360 is set to Education Edition, the host can preview any participant's screen at any time.


(E)



Click the Connection tab and click  to leave the presentation group.

Online Firmware Upgrade

Your B360 supports online firmware upgrade. When a newer firmware is available, you can upgrade the firmware of your B360 online with an Internet connection. Please see the steps outlined below.

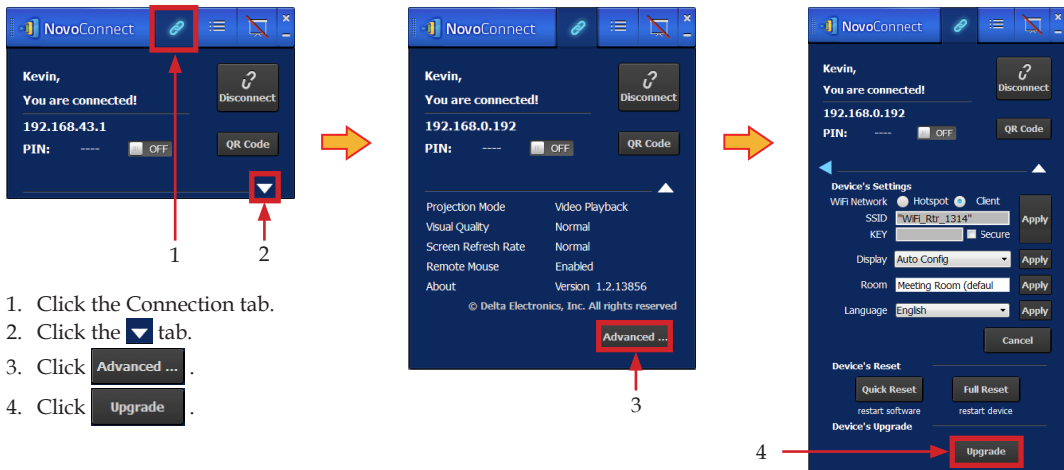

The image shows a sequence of three screenshots from the NovoConnect application interface, illustrating the steps to reach the firmware upgrade screen. The interface is dark-themed with blue accents.

- Screenshot 1:** Shows the main connection screen. A red box highlights the 'Connection' tab icon (a blue link symbol) in the top navigation bar. A red arrow points to it with the number '1'. Another red box highlights a dropdown arrow icon in the bottom right corner, with a red arrow pointing to it and the number '2'.
- Screenshot 2:** Shows the 'Advanced ...' button highlighted with a red box and a red arrow pointing to it with the number '3'. The screen displays various settings like Projection Mode, Video Playback, Visual Quality, etc.
- Screenshot 3:** Shows the 'Device's Upgrade' section at the bottom of the settings screen. The 'Upgrade' button is highlighted with a red box and a red arrow pointing to it with the number '4'.

1. Click the Connection tab.
2. Click the ▾ tab.
3. Click **Advanced ...**.
4. Click **Upgrade**.

For More Information

Please refer to the B360 user manual for more information on all the features and tools available. Here is a quick list of topics in the B360 user manual useful in making an effective presentation:

- MS, PDF, and Photo document presentations
- Annotation Tools for tablets and PCs
- Browser-based content presentations
- microSD card-based document presentations
- Resetting a presentation session
- Display parameters configuration
- Wi-Fi setup



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Notes



Taiwan

Delta Electronics Inc. Education Solutions and Service Department
186, Ruey Kuang Road, Neihu, Taipei
11491, Taiwan R.O.C.
T +886-2-87519506 / F +886-2-8797-2120

www.deltaww.com