


Optional Tips for FX-8801



Packing List

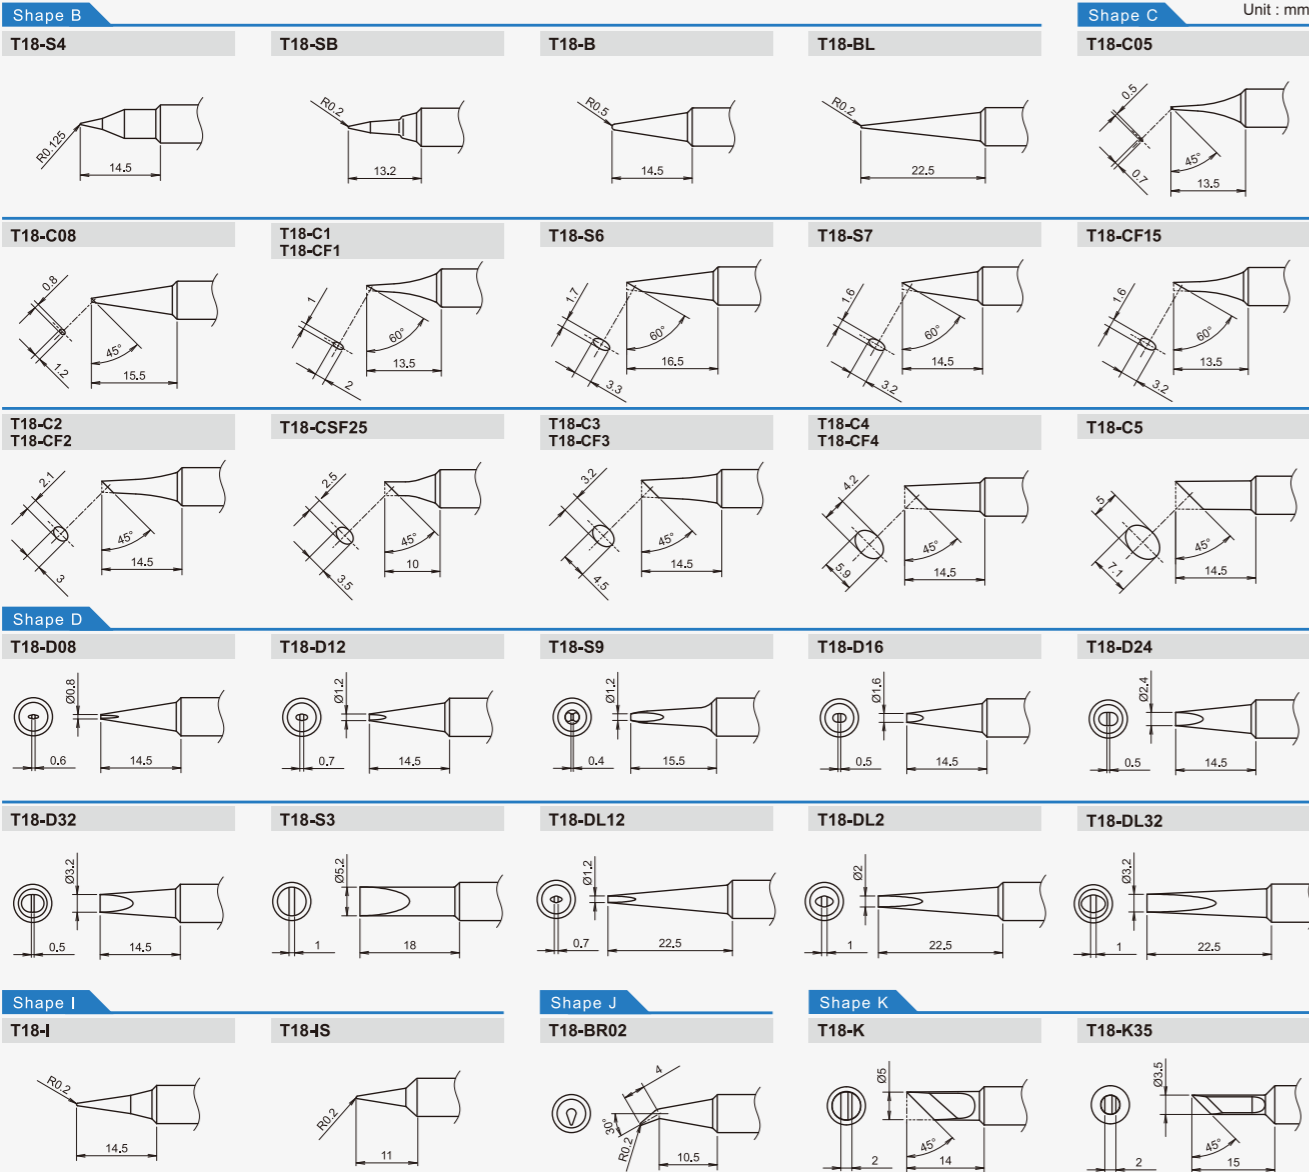

FX-888DX

Station, Handpiece FX-8801, Iron holder (with cleaning sponge and wire), Instruction manual

Standard tip T18-B
Optional tips T18 series

Specifications

| | |
|--------------------------|---|
| Model No. | FX-888DX |
| Body color | Titanium Sliver Blue&Yellow Sunflower Yellow |
| Power consumption | 100 W |
| Temperature range | 50 to 480°C |
| Temperature stability | ±1°C (At idle temperature) (When set to 200 to 480°C) |
| Station | |
| Output | AC 26 V |
| Dimensions | 100 (W) × 120 (H) × 125 (D) mm |
| Weight | 1.2 kg |
| Handpiece | |
| Power consumption | 65 W (26 V) |
| Tip to ground resistance | <2 Ω |
| Tip to ground potential | <2 mV |
| Heating element | Ceramic heater |
| Standard tip | Shape B (T18-B) |
| Cord length | 1.2 m |
| Total length | 217 mm (with T18-B tip) |
| Weight | 46 g (with T18-B tip) |
| Iron holder | Titanium Sliver |

*Total length and weight are measured without cord.

Option



FX-8806

Handpiece FX-8806, Iron holder (with cleaning sponge and wire), Instruction manual

Standard tip T32-D24
Optional tips T32 series

FX8806-811 / Conversion kit

FX8806-81 / Handpiece only

Web page for FX-8806



OVERSEAS AFFILIATES
U.S.A.
AMERICAN HAKKO PRODUCTS, INC.
28920 AVENUE WILLIAMS VALENCIA, CA 91355, U.S.A.
TEL: (661) 294-0090 FAX: (661) 294-0096
Toll Free (800)88-HAKKO
4 2 3 3 6
https://www.HakkoUSA.com
E-mail:Support@HakkoUSA.com

HEAD OFFICE
4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN
TEL:+81-6-6561-3225 FAX:+81-6-6561-8466
https://www.hakko.com E-mail:sales@hakko.com

HONG KONG
HAKKO DEVELOPMENT CO., LTD.
ROOM 1504, EASTERN HARBOUR CENTRE,
28 HOI CHAK STREET, QUARRY BAY, HONG KONG.
TEL: 2811-5588 FAX: 2590-0217
https://www.hakko.com.cn
E-mail:info@hakko.com.hk

SINGAPORE
HAKKO PRODUCTS PTE LTD
1, GENTING LINK #02-04
PERFECT ONE, SINGAPORE 349518
TEL: 6748-2277 FAX: 6744-0033
https://www.hakko.com.sg
E-mail:sales@hakko.com.sg

Please access the web address below for other distributors.

https://www.hakko.com

Specifications and design are subject to change without notice. Copyright HAKKO Corporation. All right reserved.



FX-888DX





PRODUCTION LINE



FX-8806

95 W Soldering iron
(optional accessory)


A new accessory for increase of work efficiency.
95 W superb performance heater and new designed tip adopted soldering iron.



How do you solder? FX-888DX



HOBBY

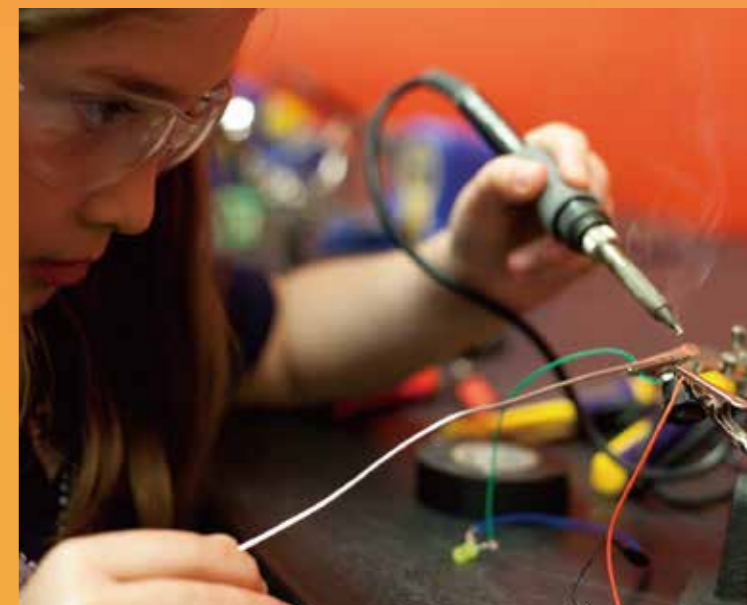

EDUCATION



Adopting rotary encoder

Ideal operability for simple temperature setting by "Turn" and "Push".

