

### Brief Product Description

This time delay switch can be used to delay a lighting circuit from switching off for 30s -20 minutes, with easy to use timer function and manual override function. This delay timer can be used in the BG range of consumer units and enclosures.

### Features

- 1 Module
- Manual Override
- 30 Seconds to 20 Minute Countdown Period
- 16A Switching Capability

### Part Code


Cat No.	Description
CUTS1	Time Delay Switch 30s - 20 Minutes

### Technical Specifications


Channels	2 Channel
Programme Type	Daily Programme
Shortest Switching Time	1 Minute
Permanent ON/Off Switch	Yes
Manual Switching	Yes
Switching Display Status	Yes
Rated Operational Voltage Ue	230V
Operating Temperature Range	-10°C - + 50°C
Languages	English/Spanish/French/ German/Portuguese/ German/Italian
Power Reserve	5 Years
Time Accuracy	± 2 Sec/Day
Switching Capacity	Resistive Load 16A Inductive Load 4A
Memory Inputs	48
Standards BS EN 60730-1 BS EN 6073-02-7	



### Product Images

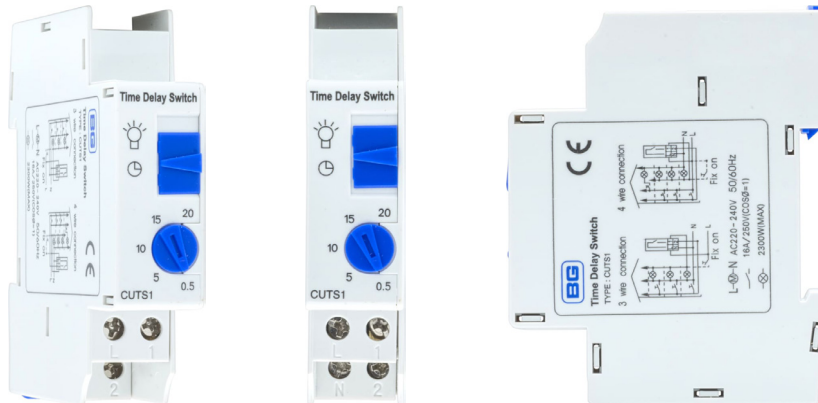

### Dimensional Line Drawing

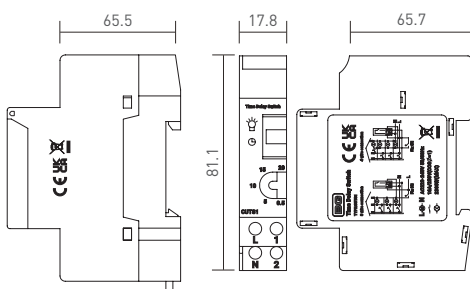

### Dimensions of Product

Height: 81.1mm

Width: 65.5mm

Depth: 65.7mm



**CIRCUIT**  
PROTECTION

# Technical Data

## Time Delay Switch 1 - 20 Mins

### Guarantee

BG Electrical Circuit Protection products are guaranteed against faulty materials and workmanship for a period of 10 years from date of delivery.

Products will be repaired or (at BG Electrical's discretion) replacements will be supplied or (at BG Electrical's discretion) a credit note will be issued. This guarantee is subject to BG Electrical's conditions of sale and in particular to the following conditions being met.



1. Notification of any defect is given as soon as reasonably practicable after becoming apparent, and the products then returned to BG Electrical.
2. The products have only been operated under normal operating conditions and have only been subject to normal use.
3. No work (other than normal and proper maintenance) has been carried out to the products without BG Electrical's prior written consent.
4. The products have been assembled, or incorporated into other goods, by a qualified and recognised electrician and only in accordance with any instructions issued by BG Electrical.
5. The defect has not arisen from an item manufactured or supplied by a person other than BG Electrical.

This guarantee does not affect any customer statutory rights.

All components used in a BG Electrical enclosure, must be supplied by BG Electrical.

The use of any other components will negate compliance to BS 61439 and the BG Electrical guarantee. Failure to fit the enclosure in accordance with these instructions will invalidate the guarantee.