

Connecting X10 Cameras to Wirepath NVRs

The following steps guide you through adding your Luma X10 series camera to a Wirepath brand NVR.

Set up ONVIF in the Camera

Log in to the Luma X10 camera.

In the camera interface, click the **Enable ONVIF** checkbox at the top left.


Next, navigate to **Advanced Network Settings** and click the **Integration Protocol** tab.

Click the **Add** button.

Create a new user ("ONVIF" is an obvious choice) and password. Set that user's level to Administrator.

Click **Save**.

Do this for each X10 camera.

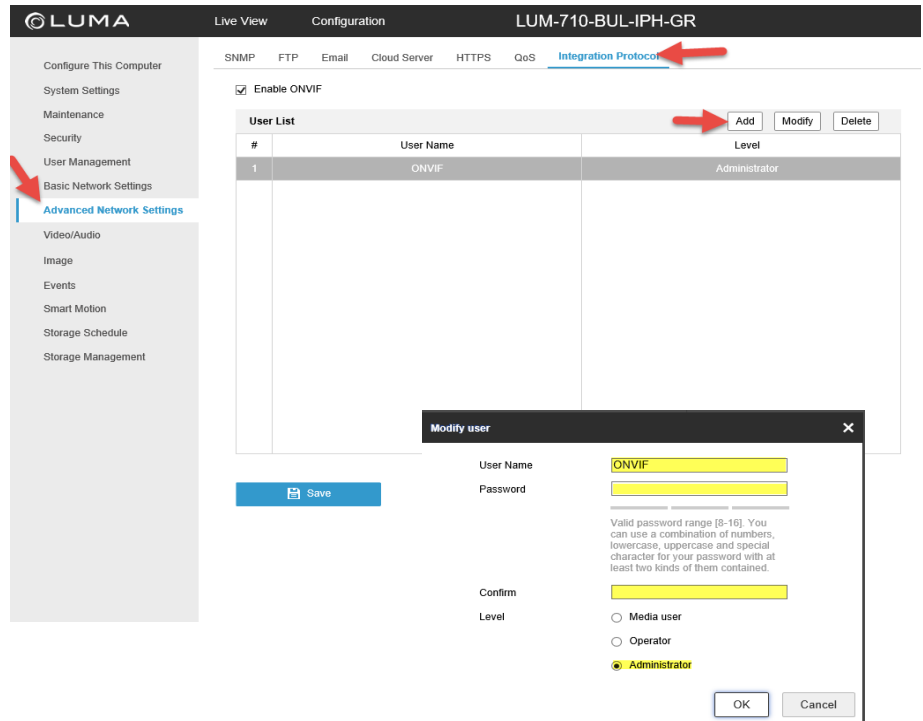

Set up the Wirepath NVR

Log in to the Wirepath NVR.

Navigate to **NVR Settings > Camera Setup**.

Click **Enable**.

Set the Mode to ONVIF.

At the bottom, enter the new ONVIF credentials you just created in the camera interface.

Click **Save**.

Your camera should now connect.

