


Cable Protection Duct

with perforated bottom, incl. cover without barrier wall

HKL6060.6

EAN Code: 4011126211290
 Smallest packaging unit: 32 m
 quantity unit: m M

the photorealistic images are to be considered as reference images

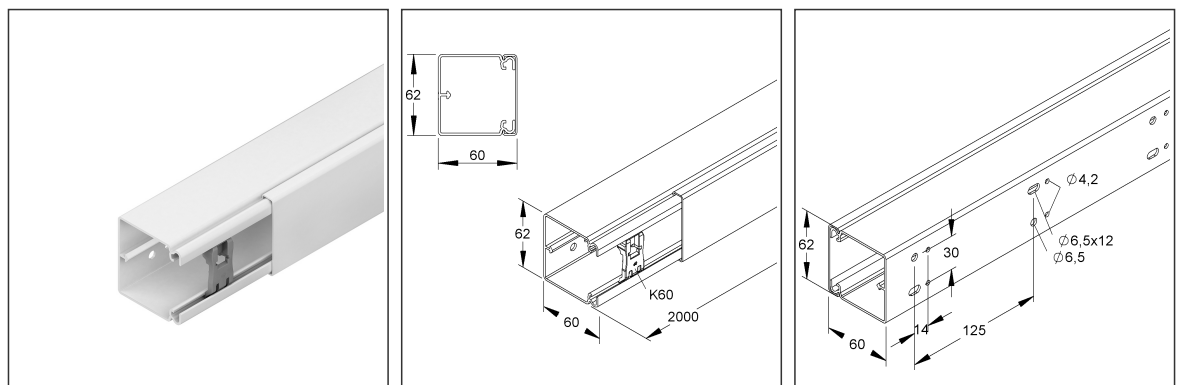

Article Description

HKL-cable protection duct, with bottom perforation, 60x62x2000 mm, plastics PVC-hard, RAL 9001, cream white, incl. accessories

Incl. accessories

4 x K60

Additional Price Information

Article group	K640
quantity unit	m

Weight

Weight per quantity unit	736 g / m
Weight in kg per 100	74 kg / 100m

Technical Datasheet

Cable routing duct

HKL6060.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	61.70 mm
Width	60.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	60.00 mm	Height	62.00 mm
Gross weight	1,47 kg	Volume	0,007 m ³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

32 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	250 mm	Height	245 mm
Gross weight	25 kg	Volume	0,123 m ³		
Min. Quantity	32.00 m	Max. Quantity	32.00 m		

288 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	307 kg	Volume	2,403 m ³		
Min. Quantity	288.00 m	Max. Quantity	288.00 m		

Tender Text

Electrical installation trunking, with cover and double-row, alternating fixing holes in the base, without partition, mounting profile in the base for a partition, including 4 retaining clips K... each 2 m delivery length, halogen-containing.

VDE certified!

Retaining clips : 4 x K60

Dimensions (approx. dimensions)

Height H x width W : 60 x 62 mm

double-row floor perforation : Ø 6.5 x 12 mm, Ø 6.5 mm and 2 x Ø 4.2 mm

Bottom hole spacing grid spacing : 125 mm

Row spacing : 30 mm

Delivery length L : 2000 mm

Usable cross-section : 2204 mm²

Material : PVC-hard (polyvinyl chloride)

Colour : cream white

RAL : 9001 (similar)

Kleinhuis Model no. : HKL6060.6

EP Material _____ EP Wage _____

Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable routing duct

HKL6060.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
SVO60.6	Joint cover, width 60 mm, turning over 12,5 mm, plastics ASA, RAL 9001, cream white

Barrier strip

Model No.	Description
BTR65	Barrier wall, 49x2000 mm, plastics PVC-hard