DATA SHEET

Valid from: 17.09.2018 AB-B4-M12-4-10,0PUR



Description

Sensor/actuator box

 Connection methods: rapid interlock without LED master cable, markers and single-assigned slots

• slots: 4, cable length: 10 m





Number of slots: 4

Nominal voltage U:_N 120 V

Max. current carrying capacity per path: 2 A

Total current: 1x12 A

Connection type: Individual wires

Current carrying capacity per slot: 4 A Number of poles: 4

Degree of protection: IP65/IP67/IP69K

Status display: no Inflammability class acc. to UL 94: V0

Contact surface material: Gold-plated Material, O-ring: NBR

Material of the moulding mass: PUR

Material of threaded sleeve: Zinc die-cast
Material of threaded sleeve surface: Nickel-plated
Tightening torque slot sensor/actuator 0.4 Nm

cable:

Tightening torque screw plug: 0.4 Nm

Conductor data

Cable types: Master cable suitable for flexi-

ble cable conduit

Outer diameter: 6.9 mm

Conductor structure, voltage supply: 42x0.15 mm

Conductor structure, signal line: 19x0.15 mm

AWG power supply: 18
AWG signal line: 22


Power supply cross section: 3x0.75 mm²
Signal line cross section: 4x0.34 mm²
Max. bending cycles: 1500000
Traversing path: 2 m
Traversing rate: 2 m/s

Slot/position = Wire color or connection: 1/4(A) = WH


Creator: FELI1/PDP Document: DB22260011EN
Released: IVSE1/PDP Version: 04
Page 1 of 3

22260011	DATA SHEET	Ω I ΔPP
Valid from: 17.09.2018	AB-B4-M12-4-10,0PUR	

Technical drawing

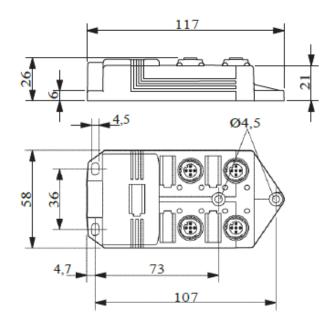


Circuit diagram

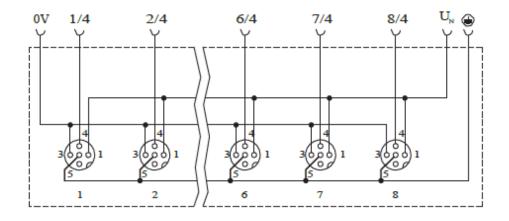

Creator: FELI1/PDP	Document: DB22260011EN	Dogo 2 of 2
Released: IVSE1/PDP	Version: 04	Page 2 of 3

22260011	DATA SHEET	Ω I ΔPP
Valid from: 17.09.2018	AB-B4-M12-4-10,0PUR	

Schema drawings



Pin assignment

Slot/ position = Wire color or connection

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP	Document: DB22260011EN	Dogo 2 of 2
Released: IVSE1/PDP	Version: 04	Page 3 of 3