

# **КТМ-МВЗ1112Р** КТМ

SICK Sensor Intelligence.

**CONTRAST SENSORS** 

CONTRAST SENSORS



### **Ordering information**

Туре	Part no.
KTM-MB31112P	1070053

Other models and accessories -> www.sick.com/KTM

Illustration may differ



## Detailed technical data

#### Features Dimensions (W x H x D) 12 mm x 31.5 mm x 21 mm ≤ 12.5 mm **Sensing distance** Sensing distance tolerance ±3mm Small Housing design Light source LED, white 1) Light emission Long side of housing Ø 2 mm (12.5 mm) Light spot size Light spot direction Round **Receiving filters** None Adjustment Potentiometer, screw driver

 $^{1)}$  Average service life: 100,000 h at  $T_{U}$  = +25 °C.

#### Mechanics/electronics

Supply voltage	12 V DC 24 V DC <sup>1)</sup>
Ripple	$\leq$ 5 V <sub>pp</sub> <sup>2)</sup>
Current consumption	< 50 mA <sup>3)</sup>
Switching frequency	10 kHz <sup>4)</sup>
Response time	50 μs <sup>5)</sup>
Jitter	25 µs

1) Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

 $^{2)}$  May not exceed or fall below  $\mathrm{U}_{\mathrm{V}}$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> With light/dark ratio 1:1.

 $^{5)}\,\mathrm{Signal}$  transit time with resistive load.

<sup>6)</sup> Total current of all Outputs.

**CONTRAST SENSORS** 

Switching output	PNP, NPN
Switching output (voltage)	PNP: HIGH = U <sub>V</sub> $\leq$ 2 V / LOW approx. 0 V, NPN: HIGH = approx. U <sub>V</sub> / LOW $\leq$ 2 V
Switching mode	Light/dark switching
Output current I <sub>max.</sub>	50 mA <sup>6)</sup>
Time delay	None
Connection type	Cable with M12 male connector, 4-pin, 0.2 m
Protection class	III
Circuit protection	U <sub>V</sub> connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression
Enclosure rating	IP67
Weight	20 g
Housing material	Plastic, ABS
Optics material	Plastic, PMMA
Indication	LED indicator green: power on LED indicator, yellow: Status switching output Q

 $^{(1)}$  Limit values: DC 12 V (–10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.  $^{(2)}$  May not exceed or fall below U $_{v}$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> Signal transit time with resistive load.

<sup>6)</sup> Total current of all Outputs.

#### Ambient data

Ambient operating temperature	-10 °C +55 °C
Ambient temperature, storage	-20 °C +75 °C
Shock load	According to IEC 60068
UL File No.	NRKH.E348498 & NRKH7.E348498


## Classifications

ECLASS 5.0	27270906
ECLASS 5.1.4	27270906
ECLASS 6.0	27270906
ECLASS 6.2	27270906
ECLASS 7.0	27270906
ECLASS 8.0	27270906
ECLASS 8.1	27270906
ECLASS 9.0	27270906
ECLASS 10.0	27270906
ECLASS 11.0	27270906
ECLASS 12.0	27270906
ETIM 5.0	EC001820
ETIM 6.0	EC001820
ETIM 7.0	EC001820
ETIM 8.0	EC001820

**CONTRAST SENSORS** 

UNSPSC 16.0901	39121528
Connection/Pin assignment	
Connection type	Cable with M12 male connector, 4-pin, 0.2 m
Pin assignment	
BN 1	+ (L+)
WH 2	Q <sub>NPN</sub>
BU 3	- (M)
ВК 4	Q PNP


### Dimensional drawing (Dimensions in mm (inch))

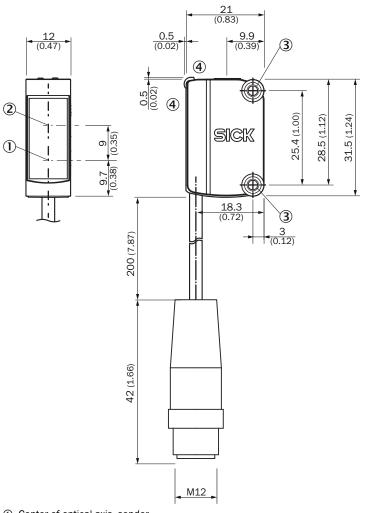

- Center of optical axis, sender
   Center of optical axis, receiver
- ③ Mounting holes M3
- ④ Display and adjustment elements

## Adjustments


Display and adjustment elements



- ① Potentiometer, adjustment of switching threshold
- ② LED yellow
- ③ LED green
- ④ Potentiometer, light/dark switching

#### Pin assignment

Connection type. see table: Connection/PIN assignment




M12 male connector, 4-pin, A-coding

## **Concept of operation**

Setting the switching threshold

#### For example dark switching

#### 1. Position background




Start at "+" (right-hinged). Turn potentiometer in direction "-" until the yellow LED goes out.

#### **Switching characteristics**

Light switching: yellow LED ≠ switching output Q Dark switching: yellow LED = switching output Q


Light/dark switching selectable by means of rotary switch KTM-xBxxx1xx: potentiometer can be adjusted with a screwdriver KTM-xBxxx9xx: potentiometer can be adjusted with a screwdriver or by hand

#### 2. Position mark



Yellow LED lights up. T Continue to turn the potentiometer t in direction ,--" until the yellow LED is goes out again.


#### 3. Set switching threshold



Turn between positions 1 and 2, to ensure that the switching threshold is optimally set.

CONTRAST SENSORS

## Sensing distance

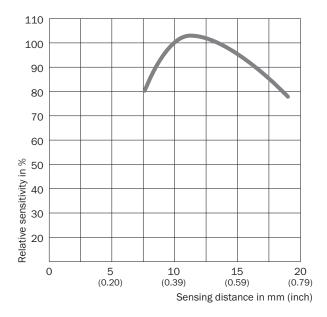

## **Recommended accessories**

Other models and accessories → www.sick.com/KTM

	Brief description	Туре	Part no.	
Device protection (mechanical)				
	Stainless steel 1.4301 (SVS 304), 3 mm thick protective sleeve for G6, stainless steel 1.4301, mounting hardware included	BEF-SG-G6-01	2069044	
Plug connectors and cables				
<b>N</b> O	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals</li> </ul>	YF2A14- 050VB3XLEAX	2096235	
80 80	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Male connector, M12, 4-pin, straight, A-coded</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals</li> </ul>	YF2A14- 050VB3M2A14	2096600	

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

