

LEO LED IP66




- | | | |
|-------------------------------------|------------------------------------|---------------------------------------|
| EN Installation Instructions | HR Uputstvo za montažu | SE Installationsanvisning |
| DE Montageanleitung | NL Montagehandleiding | RU Инструкция по монтажу |
| CZ Montážní návod | RO Instrucțiuni de montaj | SRB Instrukcija za instalaciju |
| DK Monteringsvejledning | IT Istruzioni di montaggio | SK Montážny návod |
| EE Paigaldusjuhend | LT Montavimo Instrukcijos | SLO Navodilo za montažo |
| FI Asennusohje | LV Instalācijas instrukcija | CN 安装说明书 |
| FR Notice de montage | NO Monteringsanvisning | |
| HU Szerelési útmutató | PL Instrukcja montażu | |




1. Installation and commissioning may only be carried out by authorized specialists and wired in accordance with the latest IEE electrical regulations or the national standards
2. Mains power must be switched off before carrying out installation
3. The manufacturer, shall not be liable for any damage resulting from inappropriate modifications to the luminaire or faulty installation.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. Caution, risk of electric shock.

Product Description	Wattage	SAP Code	L1	L2	W	H	Wind speed (m/s)	Windage at 13°(m²) Scx	Load
LEO LED FL IP66 75W 830 PC	75W	96632698	273	285	67	349	25m/s(90km/h)	0.034	1.6Kg
LEO LED FL IP66 75W 840 PC	75W	96630252	273	285	67	349			
LEO LED FL IP66 100W 830 PC	100W	96632699	273	285	67	349			
LEO LED FL IP66 100W 840 PC	100W	96630253	273	285	67	349			
LEO LED FL IP66 150W 830 PC	150W	96632700	366	394	72	456	25m/s(90km/h)	0.056	2.6Kg
LEO LED FL IP66 150W 840 PC	150W	96630254	366	394	72	456			
LEO LED FL IP66 200W 830 PC	200W	96632701	366	394	72	456			
LEO LED FL IP66 200W 840 PC	200W	96630255	366	394	72	456			
LEO LED FL IP66 210W 830 PC	210W	96632702	366	394	72	456			
LEO LED FL IP66 210W 840 PC	210W	96630256	366	394	72	456			

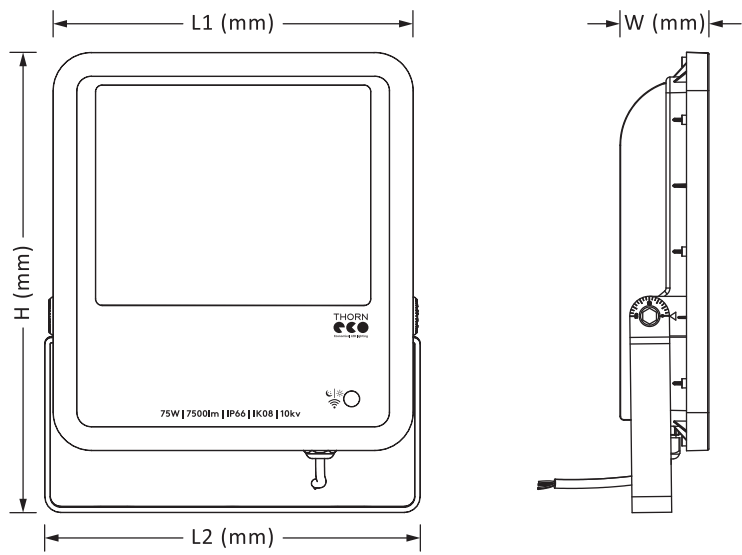

LEO LED IP66

1

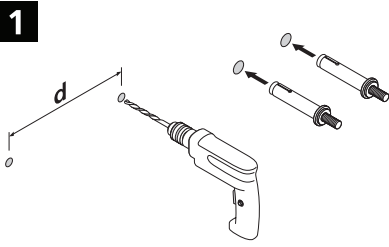


	d
LEO LED 75W	180mm
LEO LED 100W	180mm
LEO LED 150W	180mm
LEO LED 200W	180mm
LEO LED 210W	180mm

2

Parts A, B, C, D are NOT included.
Teile A, B, C, D sind nicht im Lieferumfang enthalten.
Pièces A,B,C, D non incluses.

A:Screw



75W/100W-M10x85
150W/200W/210W-M12x100

B:Washer



75W/100W-φ10.5xφ20x2
150W/200W/210W-φ13xφ24x2.5

C:Spring washer




75W/100W-φ10.2xφ15.4x6.5
150W/200W/210W-φ12.2xφ18.4x3.1

D:Nut




75W/100W-M10
150W/200W/210W-M12


3

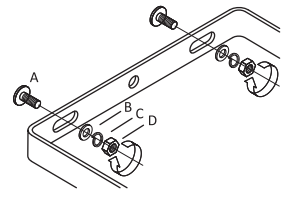



4



5


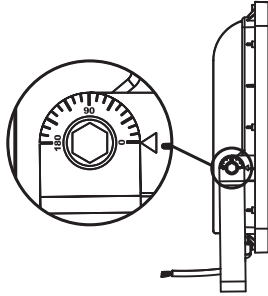


6



Photocell / Dämmerungssensor
/ Détecteur de luminosité
- : ON
o : OFF

7

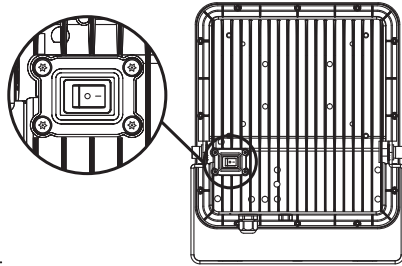

Photocell
Dämmerungssensor
Détecteur de luminosité

☀ >75LUX OFF
🌙 <25LUX ON

