# 1SET312621R0000 ACTIVE

### ENTRELEC | M8 Connector

TE Internal #: 1SET312621R0000

M8 Cable Assembly, 4 Position, 3 m, Sensor/Actuator, Code A, M8

Plug, M8 Socket, Shielded, Double Ended, GF Nylon

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies



M8/M12 Application Type: Sensor/Actuator

Number of Positions: 4

Keying Code: A

Connector Type (End A): M8 Plug
Connector Type (End B): M8 Socket

### **Features**

## Product Type Features

LED	Without
Product Type	Cable Assembly
Cable Type	PUR
Assembly Type	Pigtail
Connector Type (End A)	M8 Plug
Connector Type (End B)	M8 Socket
Cable Assembly Type	M8
Configuration Features	
Number of Positions	4
Keying Code	A
Electrical Characteristics	
Operating Voltage	30 VDC
Body Features	
Cable Exit Angle	Right Angle



Environmental Protection	With
Conductor Material	Copper Alloy
Connector Color	Blue
Wire Color	Brown, White, Blue, Black
Cable Jacket Color	Gray
Insulation Material	PVC
Contact Features	
Contact Current Rating	3 A
Mechanical Attachment	
Screw & Hole Thread Size	M8 × M8
Connector Orientation (End A)	Right Angle
Connector Orientation (End B)	Right Angle
Housing Features	
Housing Material	GF Nylon
Dimensions	
Overall Outside Cable Diameter	5 mm
Wire Size	.25 mm <sup>2</sup>
Operation/Application	
M8/M12 Application Type	Sensor/Actuator
Shielded	Yes
Other	
Field Serviceable	Yes

# **Product Compliance**

Cable Assembly Length

Cable Assembly Configuration

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224)

3 m

Double Ended



Candidate List Declared Against: JUNE 2022 (224)

SVHC > Threshold:

Pb (1.9% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.

Solder Process Capability

Not reviewed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



## Also in the Series | M8 Connector

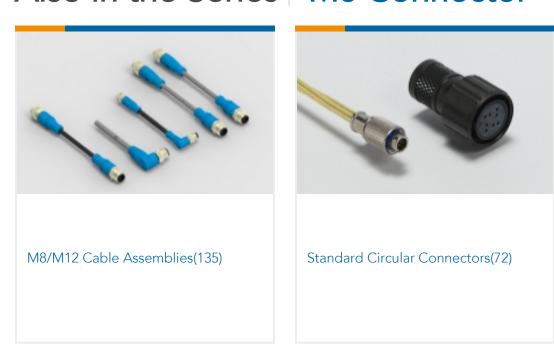

#### **Documents**

**Product Drawings** 

M8 Cable Assembly, 4 Position, 3 m, Sensor/Actuator, Code A, M8 Plug, M8 Socket, Shielded, Double Ended, GF Nylon



#### M8-MR-4P-M8-FR-PUR-3.0-SH

English

**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SET312621R0000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET312621R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET312621R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

### **Product Specifications**

**Application Specification** 

English

**Application Specification** 

English