



Application flexibility

Transformers

Stepdown transformers and autotransformers are used when you need to connect a lower voltage device to a higher voltage source.

Benefits

- Available in the most common voltages
- Linear transformer design operates cooler than a ballast

Features

- Uses Class H (180°C) insulation
- Convenient J-Box cover w/thermal protector available for some transformers

Application

- High bay retail, manufacturing, gymnasiums, warehouses, parking structures, outdoor



Versions



71A9741600

Transformers

Dimensional drawing

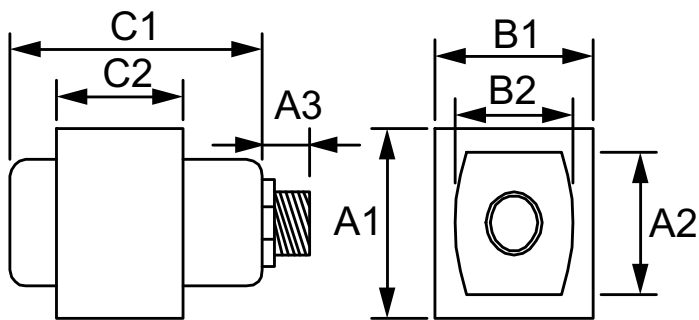

Operating and Electrical

Input Frequency 60 Hz

Operating and Electrical

Order Code	Full Product Name	Input Voltage
913700550709	AUTO-TRANSFORMER 71A9741600	277:120 or 120:277 V
913700566609	AUTO-TRANSFORMER 71A9900600	120:277 V
913700579009	AUTO-TRANSFORMER 71A9862600	347:(120/277) V
913710447602	AUTO-TRANSFORMER 71A9749600	277:120 V
913710559502	AUTO-TRANSFORMER 71A9741600J	277:120 or 120:277 V

Mechanical and Housing

Order Code	Full Product Name	Housing
913700550709	AUTO-TRANSFORMER 71A9741600	NA
913700566609	AUTO-TRANSFORMER 71A9900600	NA
913700579009	AUTO-TRANSFORMER 71A9862600	NA
913710447602	AUTO-TRANSFORMER 71A9749600	NA
913710559502	AUTO-TRANSFORMER 71A9741600J	Coil cover with 1-2 NIP

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER 71A9843600	3.6 in	2.35 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER 71A9833600C	2.8 in	1.2 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER 71A9743600C	2.8 in	1.5 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER 71A9749600	2.7 in	1.5 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER 71A9862600	3.9 in	2.7 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER 71A9900600	3.4 in	1.9 in	2.6 in	2.2 in	2.2 in	1.8 in
AUTO-TRANSFORMER AUTOXFMR 277:115 300VA C&C	3.5 in	2 in	2.6 in	2.2 in	2.2 in	1.8 in

Product	C1	C2	A1	A2	B1	B2
AUTO-TRANSFORMER 71A9862600J	4.7 in	2.7 in	2.63 in	1.81 in	2.19 in	1.84 in
AUTO-TRANSFORMER 71A9839600J	4.2 in	2.2 in	2.63 in	1.81 in	2.19 in	1.84 in
AUTO-TRANSFORMER 71A9741600J	4 in	2 in	2.63 in	1.81 in	2.19 in	1.84 in

Order Code	Full Product Name	Input Voltage
913710559902	AUTO-TRANSFORMER 71A9743600C	120:12 V
913710560102	AUTO-TRANSFORMER 71A9833600C	277:12 V
913710560302	AUTO-TRANSFORMER 71A9839600J	277:120 V
913710560602	AUTO-TRANSFORMER 71A9862600J	347:(120/277) V
913710663402	AUTO-TRANSFORMER 71A9843600	347:190 or 480:270 V

Order Code	Full Product Name	Housing
913710559902	AUTO-TRANSFORMER 71A9743600C	NA
913710560102	AUTO-TRANSFORMER 71A9833600C	NA
913710560302	AUTO-TRANSFORMER 71A9839600J	Coil cover with 1-2 NIP
913710560602	AUTO-TRANSFORMER 71A9862600J	Coil cover with 1-2 NIP
913710663402	AUTO-TRANSFORMER 71A9843600	NA

