

REVISIONS

(A) (A02607) REVISED NAMEPLATE GRAPHICS GAC 21NOV2023 - GC 21NOV2023 - KM 21NOV2023			
(B) (A02662) ADDED MERV 11 PART NUMBERS GAC 19NOV2024 - GC 19NOV2024 - KM 14JAN2025			

AAF PART NUMBER	NOMINAL SIZE		ACTUAL SIZE		RATED AIRFLOW (CFM)	MEDIA AREA (ft²)	RATED INITIAL RESISTANCE @ 500 FPM (in. W.G.)	RECOMMENDED FINAL RESISTANCE (in. W.G.)	ASHRAE 52.2 MERV	CONTINUOUS OPERATING TEMPERATURE LIMITS		FILTERS PER CARTON
	W	H	W	H						DEG F	DEG C	
3184626-601	12 [305]	24 [610]	11 3/8 [289]	23 3/8 [593]	1000	28.1	0.27	1.50	11	150	66	4
3184626-602	16 [406]	20 [508]	15 3/8 [390]	19 3/8 [492]	1100	31.2						
3184626-603	16 [406]	25 [635]	24 3/8 [619]	15 3/8 [390]	1400	38.8						
3184626-604	18 [457]	24 [610]	17 3/8 [441]	23 3/8 [593]	1500	43.2						
3184626-605	20 [508]	20 [508]	19 3/8 [492]	19 3/8 [492]	1400	39.2						
3184626-606	20 [508]	24 [610]	19 3/8 [492]	23 3/8 [593]	1650	47.5						
3184626-607	20 [508]	25 [635]	24 3/8 [619]	19 3/8 [492]	1750	49.0						
3184626-608	24 [610]	24 [610]	23 3/8 [593]	23 3/8 [593]	2000	57.2						
3184626-611	12 [305]	12 [305]	11 3/8 [289]	11 3/8 [289]	500	13.4	0.33	1.50	14	150	66	4
3184626-801	12 [305]	24 [610]	11 3/8 [289]	23 3/8 [593]	1000	28.1						
3184626-802	16 [406]	20 [508]	15 3/8 [390]	19 3/8 [492]	1100	31.2						
3184626-803	16 [406]	25 [635]	24 3/8 [619]	15 3/8 [390]	1400	38.8						
3184626-804	18 [457]	24 [610]	17 3/8 [441]	23 3/8 [593]	1500	43.2						
3184626-805	20 [508]	20 [508]	19 3/8 [492]	19 3/8 [492]	1400	39.2						
3184626-806	20 [508]	24 [610]	19 3/8 [492]	23 3/8 [593]	1650	47.5						
3184626-807	20 [508]	25 [635]	24 3/8 [619]	19 3/8 [492]	1750	49.0						
3184626-808	24 [610]	24 [610]	23 3/8 [593]	23 3/8 [593]	2000	57.2	0.41	1.50	15	150	66	4
3184626-811	12 [305]	12 [305]	11 3/8 [289]	11 3/8 [289]	500	13.4						
3184626-901	12 [305]	24 [610]	11 3/8 [289]	23 3/8 [593]	1000	28.1						
3184626-902	16 [406]	20 [508]	15 3/8 [390]	19 3/8 [492]	1100	31.2						
3184626-903	16 [406]	25 [635]	24 3/8 [619]	15 3/8 [390]	1400	38.8						
3184626-904	18 [457]	24 [610]	17 3/8 [441]	23 3/8 [593]	1500	43.2						
3184626-905	20 [508]	20 [508]	19 3/8 [492]	19 3/8 [492]	1400	39.2						
3184626-906	20 [508]	24 [610]	19 3/8 [492]	23 3/8 [593]	1650	47.5						
3184626-907	20 [508]	25 [635]	24 3/8 [619]	19 3/8 [492]	1750	49.0	0.41	1.50	15	150	66	4
3184626-908	24 [610]	24 [610]	23 3/8 [593]	23 3/8 [593]	2000	57.2						
3184626-911	12 [305]	12 [305]	11 3/8 [289]	11 3/8 [289]	500	13.4						


FRAME:
HIGH IMPACT POLYSTYRENE, COLOR - BLACK

MEDIA:
100% SYNTHETIC FIBER UNIFORM MEDIA
WITH CONTROLLED FIBER SIZE AND BLEND

SEPARATOR:
EMBOSSED FILTER MEDIA - SELF SPACING

ASSEMBLY ADHESIVE:
POLYURETHANE

TOLERANCES:
DEPTH: ±1/16"
HEIGHT AND WIDTH: ±1/8"

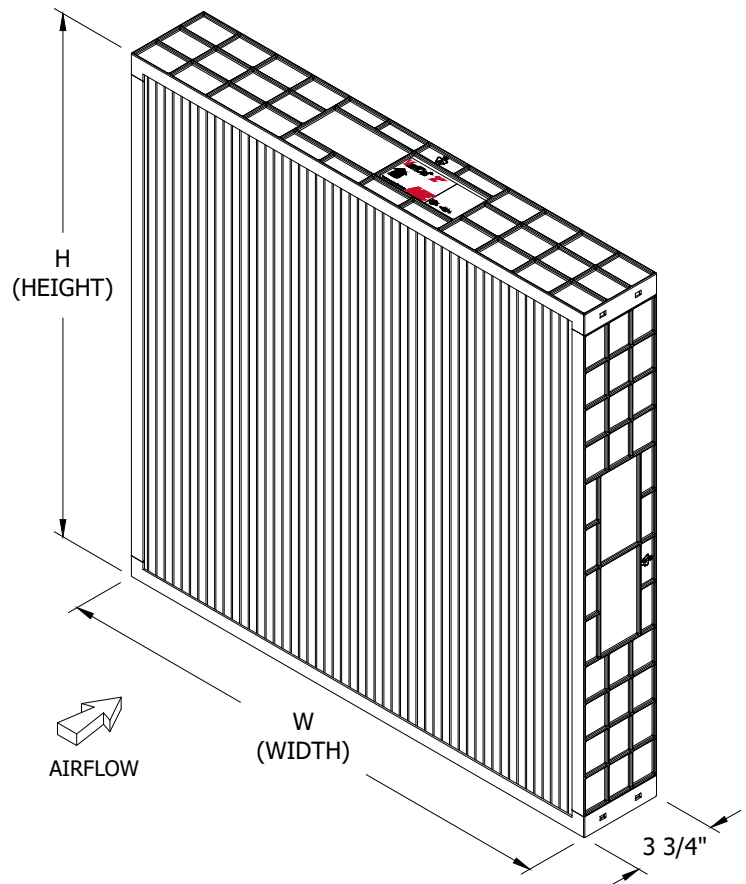

FORM I297 REV. 5/00

DRAWN GAC	DATE 27FEB2023	CHECKED GC	DATE 27FEB2023	APPR. KM	DATE 28FEB2023	 P.O. Box 35690 Louisville, KY. 40232-5690 www.aafintl.com FILTER ASSEMBLY, VARICEL 2+ (NH STD AF) (SUBMITTAL) DRAWING NO. 3185564 SHEET 1 OF 1 REV B
--------------	-------------------	---------------	-------------------	-------------	-------------------	---