


Goulds Water Technology

Residential Water Systems

PERFORMANCE RATINGS – SHALLOW WELL SYSTEM

HP/Model	¾ HP – HSJ07N					1 HP – HSJ10N					1½ HP – HSJ15N							2 HP – HSJ20N						
Shallow Well Package	FHSJ07					FHSJ10					FHSJ15							FHSJ20						
Adapter	4K62										4K62													
Nozzle	AN012					ANO12					ANO12							ANO12						
Venturi	AD3432					AD3437					AD3439							AD3448						
	Discharge Pressure – PSI										Discharge Pressure – PSI													
Total Suction Lift (feet)	30	40	50	60	Max. Shut off (PSI)	30	40	50	60	Max. Shut off (PSI)	30	40	50	60	70	80	Max. Shut off (PSI)	30	40	50	60	70	80	Max. Shut off (PSI)
	Gallons per minute					Gallons per minute					Gallons per minute							Gallons per minute						
5'	18.5	18.3	14.6	8.0	76	22.8	22.7	19.8	12.2	79	22.8	22.8	22.8	21.7	17.0	11.2	104	28.2	28.0	25.8	22.7	21.2	16.2	105
10'	15.9	15.8	12.7	6.7	74	20.7	20.3	17.5	10.3	77	20.7	20.7	20.7	20.0	16.3	9.0	102	24.8	24.7	24.2	23.3	18.7	13.7	103
15'	13.8	13.8	11.0	5.6	71	18.0	17.8	15.2	9.2	74	18.0	18.0	18.0	17.7	14.2	–	99	21.3	21.3	20.8	20.7	18.7	13.7	101
20'	13.8	11.3	9.2	–	68	14.5	14.3	12.8	–	71	15.0	15.0	15.0	15.0	12.0	–	97	18.0	17.7	17.5	17.0	16.2	10.8	98
25'	8.6	8.6	5.7	–	65	11.5	11.4	8.3	–	68	11.2	11.2	11.2	11.0	–	–	95	12.3	12.0	11.9	11.7	10.5	–	95

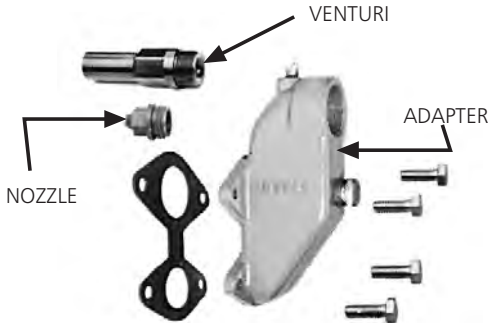

SHALLOW WELL PACKAGE