
## SUBMITTAL DATA SHEET

NL Ball Style Corporation Stop – 74704B-33

MNPT x -33 PEP Compression



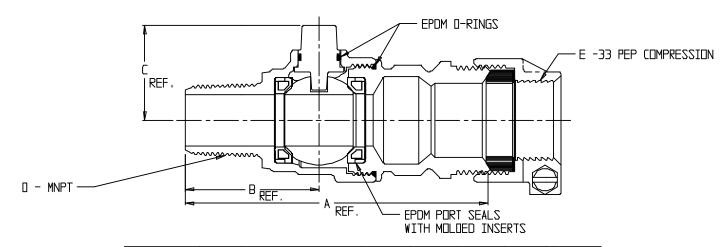

MODEL	SIZE	А	В	С	D	E
74704B-33	3/4	4,44	1.96	1.38	3/4	3/4
74704B-33	3/4 X 1	4.49	1.96	1.38	3/4	1
747048-33	I	4.54	2,15	1.50	1	1
74704B-33	1 1/4	6.06	3.02	1.8B	1 1/4	l 1/4
74704B-33	1 1/2 X 1 1/2 X 1 1/4	6,08	3.05	2.15	1 1/2	l 1/4
74704B-33	1 1/2	6,96	3.05	2.15	1 1/2	l 1/2
74704B-33	2	7.66	3.2l	2,46	2	2

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball rotates 360°
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



A.Y.~McDonald~Mfg.~Co.

P.O. Box 508

Dubuque, IA 52004-508

**Toll Free:** 1-800-292-2737

Fax: 1-800-832-9296

**Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 10-14