| | |
|---|---|
| Requester: | National Public Seating Corp<br>149 Entin Rd<br>Clifton, NJ 07014 |
| Contact Name: | Sherri Miller |
| Dates Tested: | 08/04/26 - 08/05/26 |
| Date Issued: | 08/5/26 |
| Technician: | Matt DeKock |
| UL Order / Project Number: | 16422719 / 4792326998 |

**Scope:** To evaluate the DY-MPD Transport Dolly, supplied by National Public Seating Corp, by subjecting it to the following tests:

**Requested Tests:**

| Test Name | Requirement |
|---|---|
| Durability Test for Chair Carts/Dollies with Casters | BIFMA SC-2015, Section 7 |
| Custom Functional/Proof Load Test | Information only |

**Product Description:**

| Specimen | Description | Received | Condition | Supplier |
|---|---|---|---|---|
| 9974985 | Product name: Transport Dolly<br>Model: DY-MPD | 07/16/26 | New | National Public Seating Corp |

**Summary:**

| Test Name | Results |
|---|---|
| Durability Test for Chair Carts/Dollies with Casters | Met Requirements |
| Custom Functional/Proof Load Test | No breakage or loss of function. |

This report shall not be reproduced, except in full, without written permission from UL. Results contained within this report only apply to the actual product tested under the testing conditions documented in this report.

**Test Results:**

**Durability Test for Chair Carts/Dollies with Casters:**

Testing was performed referencing BIFMA SC-2015, Section 7.

**Notes:**

- Specimen was subjected to 5000 cycles over ⅛" thresholds.
- Unit load rating: 1,000 lbs.
- Test Rate: 8 CPM.
- See photo for setup.

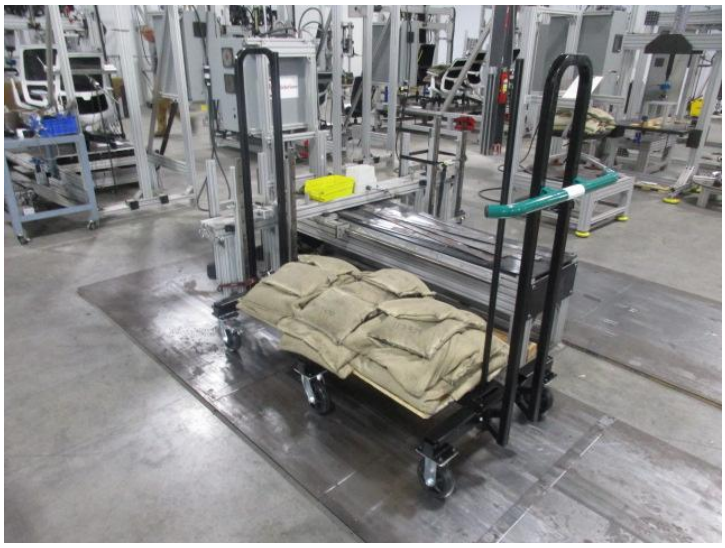

| Specimen | Cycles | Surface | Observations |
|---|---|---|---|
| 9974985 | 5,000 | Thresholds | No loss of serviceability. |

***Requirement:*** *There shall be no loss of serviceability to a caster or the cart/dolly.*

**Custom Functional/Proof Load Test:**

Testing was performed per the requester's instructions.

**Notes:**

- Unit was loaded with a functional load and proof load provided by the requester.
- See photos for setups.

| Specimen | Load (lbs.) | Observations |
|---|---|---|
| 9974985 | 1,000 | No breakage or loss of function. |
| | 1,325 | No breakage or loss of function. |

***Requirement:*** *Information only.*