


Maximum reliability. Minimum fuss.



Technical Data Sheet

Multirange aluminium rivets

Fastener Systems

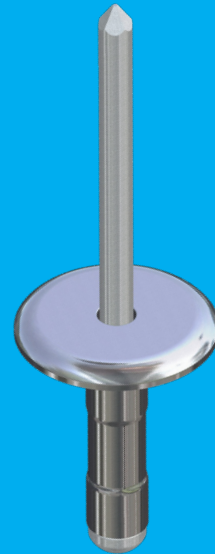


Application

- + Sheeting & Cladding
- + Facade and rainscreen
- + General construction

Key Features

- + Allows one rivet to fasten various thicknesses
- + High grade aluminium
- + Available in a wide range of RAL and BS colours

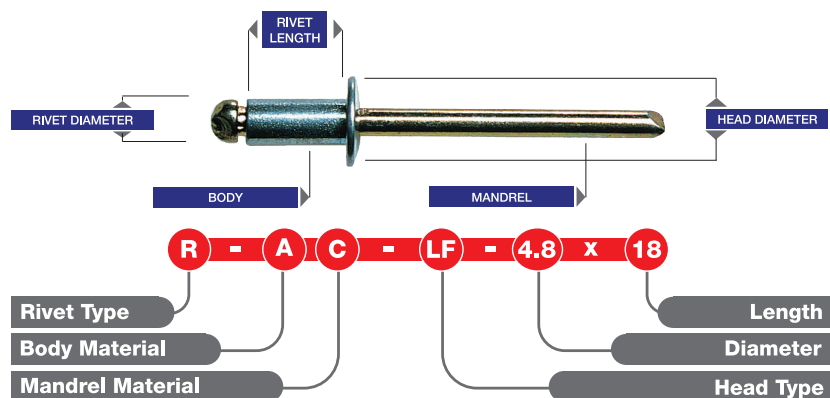

Aluminium rivets

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range (mm)	Shear (N)	Tensile (N)
R-AC-3.2x8	3.2	3.3	6.0	8	1.78	1.0-5.0	680	980
R-AC-3.2x11				9.5	1.78	2.5-7.0	680	980
R-AC-4.0x10	4.0	4.1	8.0	9.5	2.18	1.5-6.5	1150	1600
R-AC-4.0x16				17	2.18	8.5-13.0	1150	1600
R-AC-4.8x10	4.8	4.9	9.5	10	2.8	1.5-6.0	1500	2350
R-AC-4.8x15				15	2.8	4.5-11.0	1500	2350
R-AC-4.8x17				17	2.8	7.0-14.0	1500	2350
R-AC-4.8x25				25	2.8	12.5-20.0	1500	2350
R-AC-4.8x35				35	2.65	27.0-30.0	1850	2600



Large flange aluminium rivets

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range max. (mm)	Shear (N)	Tensile (N)
R-AC-LF-4.8x10	4.8	4.9	16.0	10	2.8	1.9-6.0	2230	5500
R-AC-LF-4.8x16				17	2.8	7.0-13.0	2230	5500
R-AC-LF-4.8x25				25	2.8	12.5-21.0	2230	5500



Lacquered aluminium rivets

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range max. (mm)	Shear (N)	Tensile (N)
R-AC-LAC-4.8x15	4.8	4.9	9.5	15	2.8	4.5-11.0	1500	2350





Merlin House
Seven Mile Lane
Borough Green
Sevenoaks
Kent
TN15 8QY

Enquiries
0800 304 7616
International
+44 (0) 1732 882387
Fax
0845 450 7486
Email
info@fixfast.com

