





Patented, Collated, Stainless Steel, Hidden Fastener Decking System



Making HIDfast™ the only fastener you'll ever need!

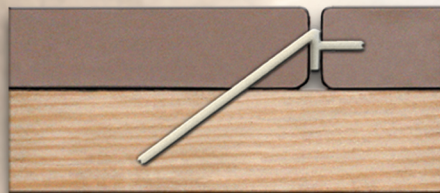


- **EASIEST**
- **FASTEST**
- **INVISIBLE**
- **STRONG**
- **WON'T RUST**



A single package of 175 patented, collated, stainless steel fasteners will do 100 square feet of 6" decking when installed 16" on center.

It's easy as:



HIDFAST is the fastest and easiest hidden fastening system for virtually all decking types


SQUARE EDGE

| DECKING | FASTENERS |
|---------------------|------------------------|
| PVC | HF2.5, HF3, HF3M, HF3W |
| Soft Wood | HF3, HF3M, HF3W |
| Medium Density Wood | HF3, HF3M, HF3W |



TONGUE and GROOVE

| DECKING | FASTENERS |
|---------------------------|-----------|
| PVC | HF2.75TG |
| CVG Wood up to 5/4" thick | HF2.75TG |



DOUBLE GROOVE ONLY

| DECKING | FASTENERS |
|------------|------------|
| Composites | HF3M, HF3W |
| Hard Wood | HF3M, HF3W |

Always check with board manufacturer for recommended gapping requirements.

Go to www.hidfast.com for more information.

By far the fastest and easiest decking system you'll ever use!



The HIDfast way - Using the HIDfast Decker means not only do you stay on your feet, in 3 minutes time you can install 8 deck boards.

100 square feet = 10 MINUTES



The old fashion way - Using a screw gun and screws means sore knees and in 3 minutes time installing only 2 deck boards.



Don't use unsightly screws that will rust or pop up and over time cause cracking, splitting and rot.



HIDfast is the fastest, easiest way to get a fastener free surface for a lasting, beautiful appearance. Patented, worry-free, stainless steel fasteners are collated for easy handling and quick loading. Patent pending pneumatic tool delivers precise, consistent, effortless installation.



HIDfast
P.O. Box 788
Kingston, NH 03848
www.HIDFAST.COM



Patented, Collated, Stainless Steel, Hidden Fastener Decking System

Best Labor Savings on the Market, Thanks to the Unmatched Speed of HIDFAST™

- **EASY**
- **FAST**
- **INVISIBLE**
- **STRONG**
- **DURABLE**



Patented, stainless steel fasteners are collated for easy handling and quick loading.

**THE FIRST AIR DRIVEN
All Stainless Steel, Hidden Fastening
System In The World That Can Fasten
Square Edge, Pre-grooved And T&G Decking.**




**Works With Virtually All decking
Wood, Composite And PVC.**



What Fastener to Use

**Installs decking up to 5 times faster and with a positive deck plank to joist connection,
"Using anything else is just a waste of time"**



| Deck Products | Preferred Fastener |  | Suggested PSI | Spacer Plate | |
|---|---|--|---------------|----------------------|----------------------|
| PVC Decking | Pkg | Square Edge & Grooved Decking | PSI Range | Spacer Plate | Square Edge Only |
| AZEK, Club House, Endeck, Wolf, Veka, Fiberon, Deckorators | Can use any of the following HF-3, HF3M, HF3W | Yes | 100-110 | 1/8" - 1/4" | Yes |
| Capped & WPC Decking | Pkg | Grooved Decking Only | PSI Range | Spacer Plate | Grooved Decking Only |
| Trex | HF-3W | Yes | 100-110 | 1/4" | Yes |
| TimberTech, Fiberon, Wolf, Evergrain, Moistureshield, Deckorators, and other brands | HF-3M | Yes | 100-110 | | |
| Wood Decking | Pkg | Square Edge or Grooved Decking | PSI Range | Spacer Plate | Square Edge Decking |
| Pressure Treated | | | 100-110 | 0- 1/8" | Yes |
| WRC | HF-3 | Yes | 70-90 | 1/8" to 1/4" | Yes |
| Redwood | HF-3 | Yes | 70-90 | 1/8" to 1/4" | Yes |
| Fir | HF-3 | Yes | 70-90 | 1/8" to 1/4" | Yes |
| Mahogany | 1x4 HF-3M / 5/4x6 HF-3W | Yes | 100-110 | 1x4 -3/16 5/4x6 1/4" | Yes |
| Kebony | HF-3W | Yes | 100-110 | | |
| | | | | | |
| Porch Floor | Pkg | T&G | PSI Range | Not Included | T&G Only |
| 3/4" Porch Floor CVG Fir or PVC | | | 80-100 | T&G | Yes |
| | | | | | |
| 7/8" Porch Floor, PVC | | | 100-110 | T&G | Yes |
| 1" Porch Floor, CVG Fir or PVC | HF-2.75TG | Yes | 100-110 | T&G | Yes |
| HIDfast fastener codes, and plank gapping: HIDfast- HF-3 = 1/8" - Hid-Fast - HF-3M = 3/16" - Hid-Fast - HF-3W = 1/4" - Hid-Fast - HF-2.5WG = 1/4" - Hid-Fast - HF-2.75TG | | | | | |
| EDGEfast one size fastener with interchangeable space plates from 0, 1/8", 3/16", 1/4" and 2 for T&G, available in 304 Stainless or Premium Edgecoat finish for a more economical fastener | | | | | |

For a Quick HIDfast Product Demo



Scan QR Code or enter in your browser: [Youtu.be/LX_3g_2s5_k](https://youtu.be/LX_3g_2s5_k)

For a Quick EDGEfast Product Demo



Scan QR Code or enter in your browser: [Youtu.be/-th17Eh5dcw](https://youtu.be/-th17Eh5dcw)



recommends the following fasteners,

| HIDfast fasteners | HF3 | HF3M | HF3W | HF2.75TG | EF2.25SS | EF2.25EC |
|--|-------------------|-------------------|-------------------|-----------------|-----------------------|---------------------|
| Decking Thickness | 2x or less | 2x or less | 2x or less | 5/4 | 5/4" or less | 5/4" or less |
| Spacer bar (gap) | 1/8" | 3/16" | 1/4" | N/A | 0, to 1/4" | 0, to 1/4" |
| Fastener length | 3" | 3" | 3" | 2 3/4" | 2.25" | 2.25" |
| AZEK square edge | YES | YES | YES | | YES | YES |
| AZEK grooved edge | YES | YES | YES | | | |
| Square edge PVC | YES | YES | YES | | YES | YES |
| Grooved PVC | YES | YES | YES | | | |
| Pressure Treated 5/4 x6 | x | x | x | | YES – 0 gap | YES - 0 |
| Pressure Treated 5/4 x6 KD | x | | | | YES – 1/8 + | YES – 1/8+ |
| Pressure Treated 2x6 KD | YES | x | x | | x | x |
| Cedar, Redwood and similar | YES | YES | YES | | YES | YES |
| Mahogany 1x4 (medium density) | YES | YES | YES | | Yes-1/8 - 1/4" | YES 1/8-1/4" |
| " 1x6 | | YES | YES | | YES – 1/4" | YES – 1/4" |
| Mahogany 5/4" x4 (medium D.) | | YES | YES | | YES | YES |
| Mahogany 5/4" x6 (medium D.) | | YES | YES | | YES – 1/4" | YES – 1/4" |
| Mahogany " x4 (hard-grooved only) | YES | YES | YES | | x | x |
| Mahogany " x6 (hard-grooved only) | | YES | YES | | x | x |
| Timbertech – grooved only | | YES | YES | | x | x |
| Trex – grooved only | | | YES | | YES | x |
| Fiberon – WPC –grooved only | | YES | YES | | x | x |
| Evergrain – grooved only | | YES | YES | | x | x |
| Moisture Shield – grooved only | | YES | YES | | x | x |
| All WPC Composites – grooved only | | YES | YES | | x | x |
| T&G - AZEK or PVC | | | | YES | YES-*.250 gap | YES-.250 |
| 1x4 & *5/4 x 4 - Fir, Syp | | | | | YES- .150 | YES -.150 |