

BLOG

25. September 2019
Düsseldorf / JCON

Einführung in Web- Components

INNOQ


MICHAEL VITZ

**Senior Consultant
bei INNOQ Deutschland GmbH**



BLOG

Komponenten im Web

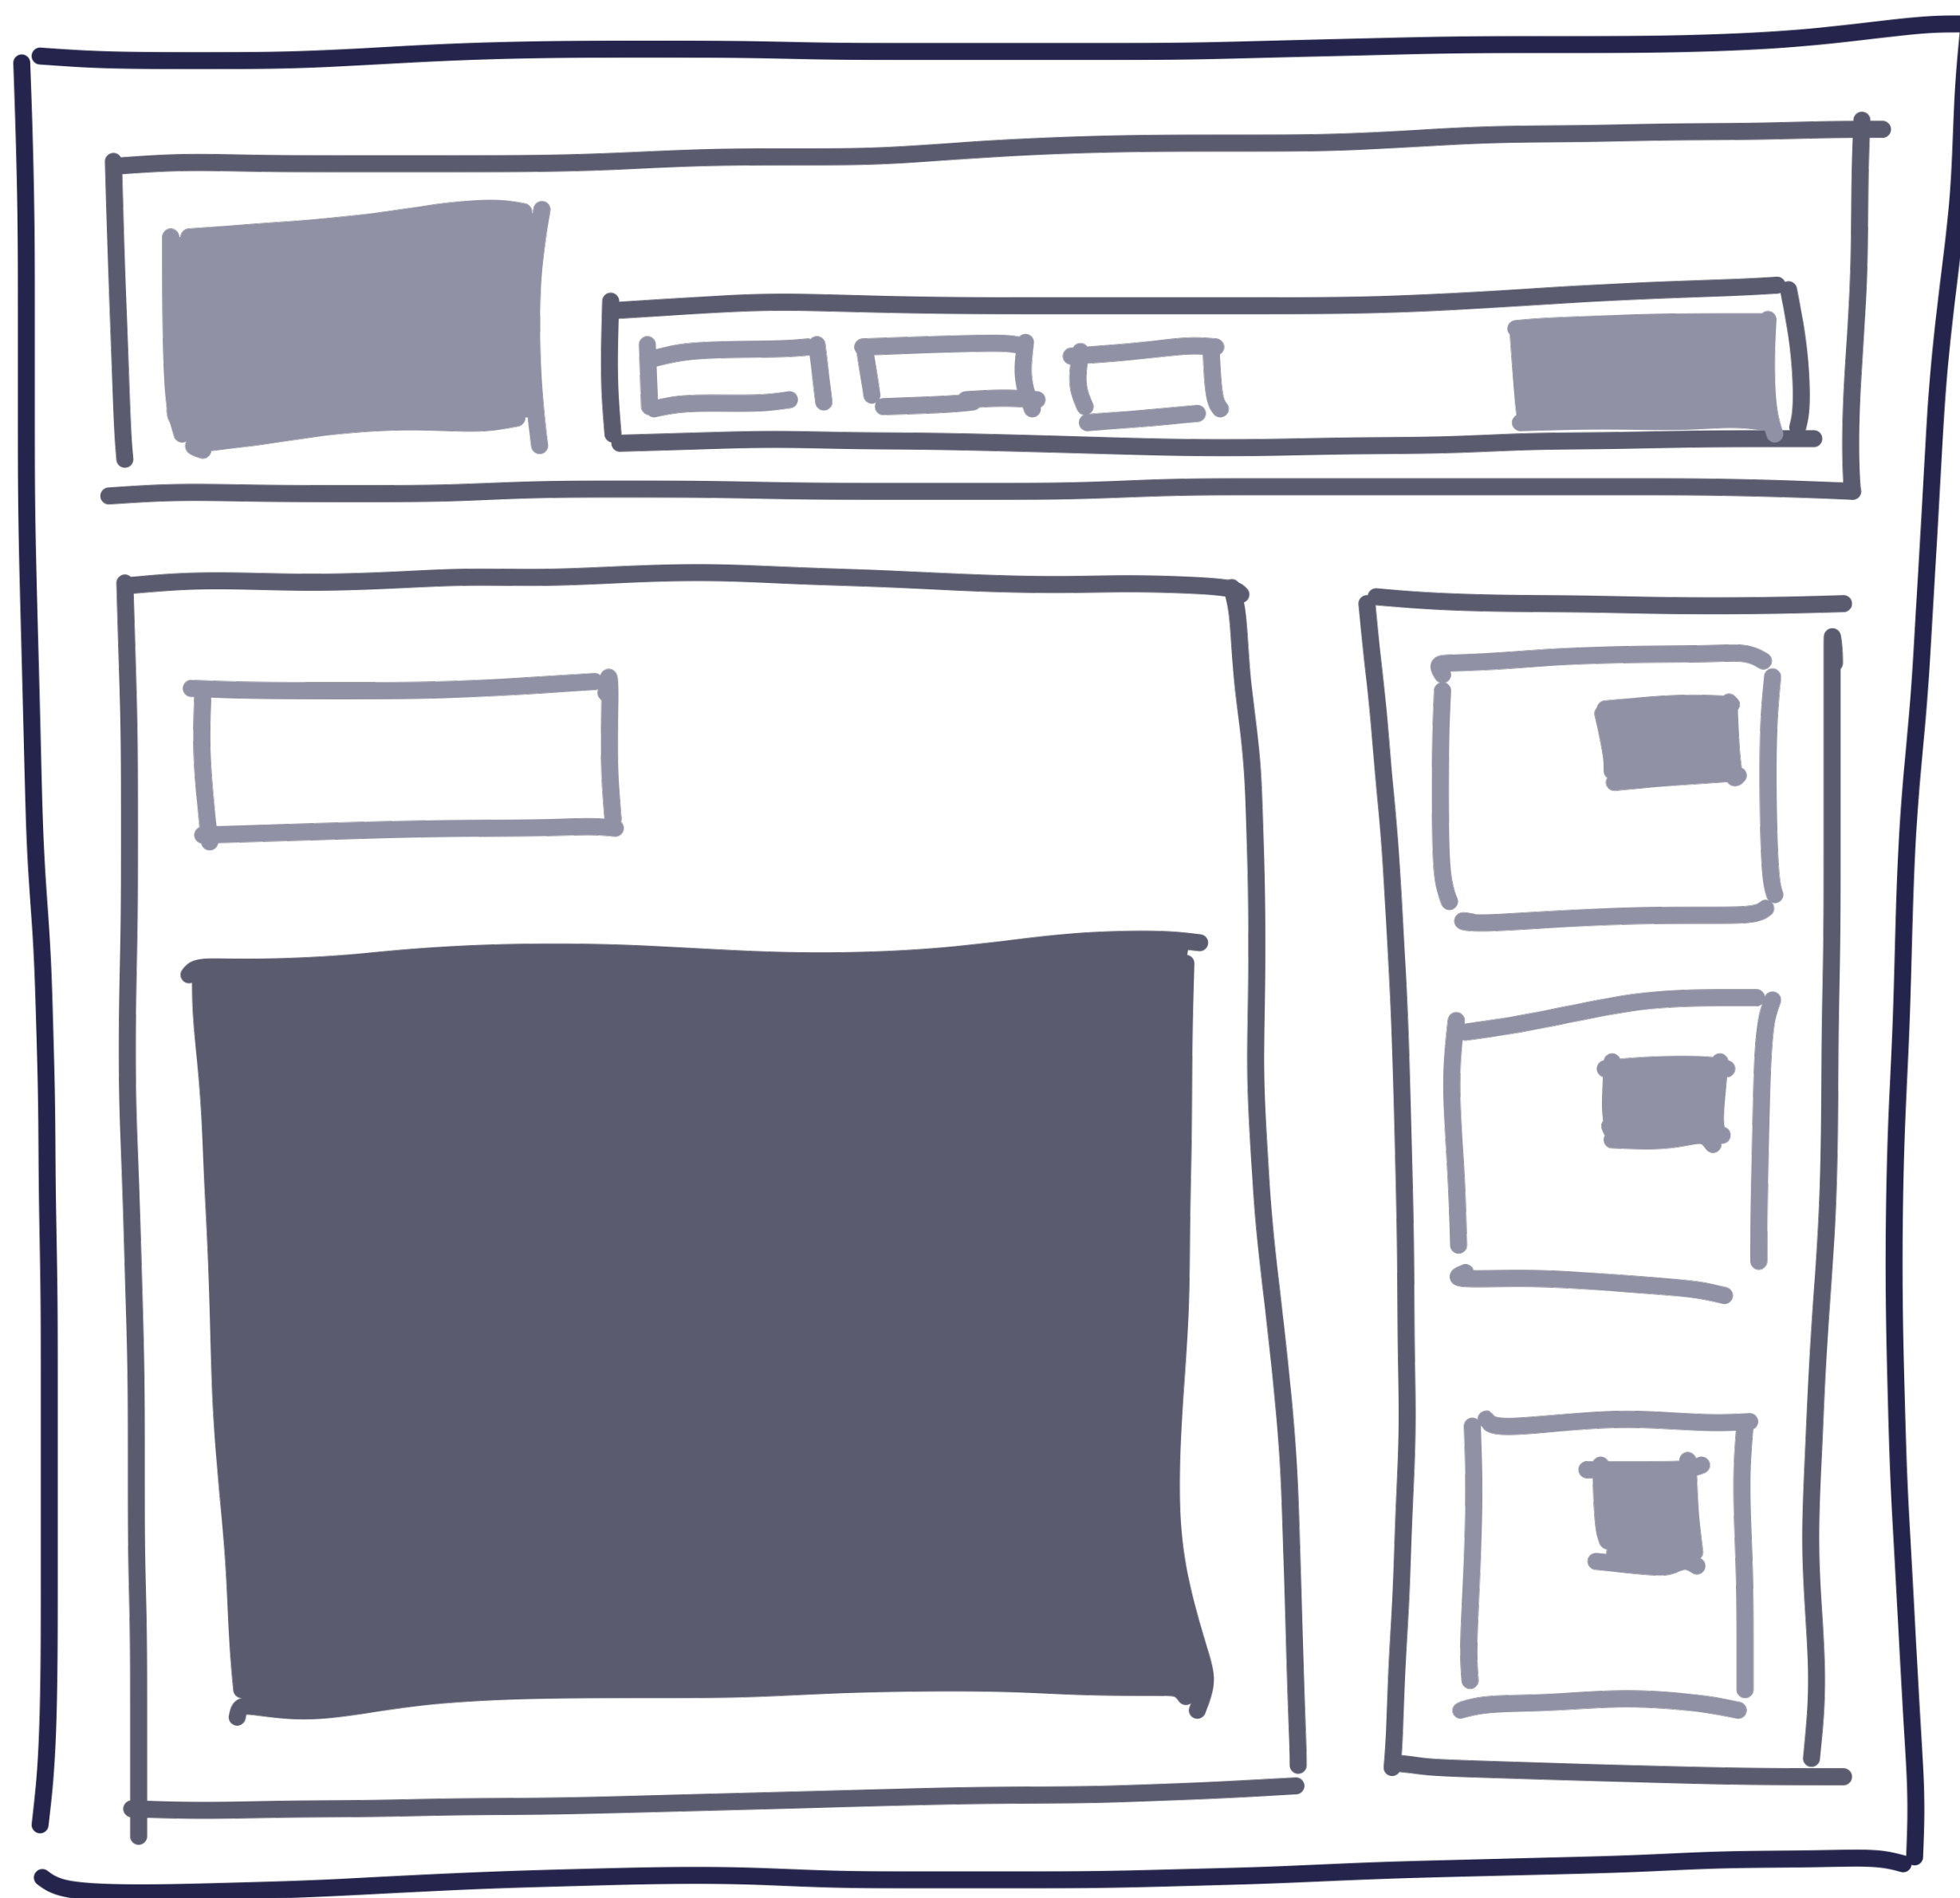




ATOMS



MOLECULES

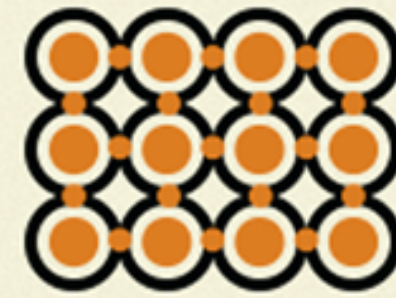


ORGANISMS



TEMPLATES



PAGES

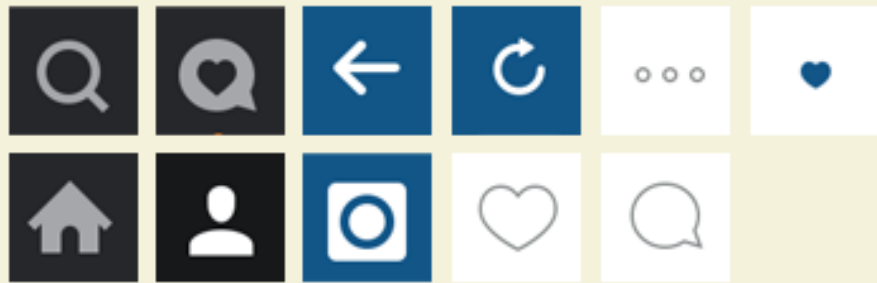



PHOTO

XXXXXX likes


thisistheusersinstagramhandle

2h


Lorem ipsum dolor sit amet, consectetur
adipisici

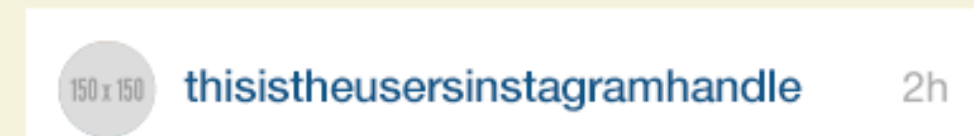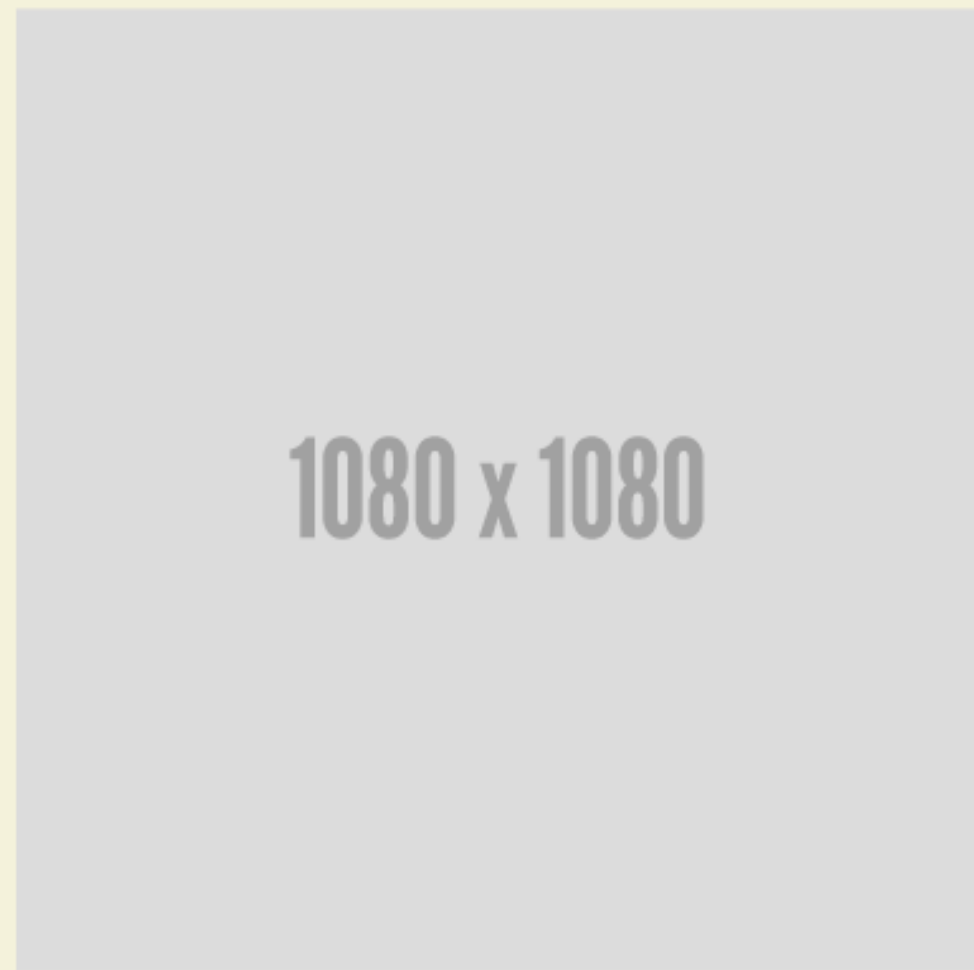

♥ XXXXXX likes
thisistheusersinstagramhandle Lorem
ipsum dolor sit amet, consectetur adipisici

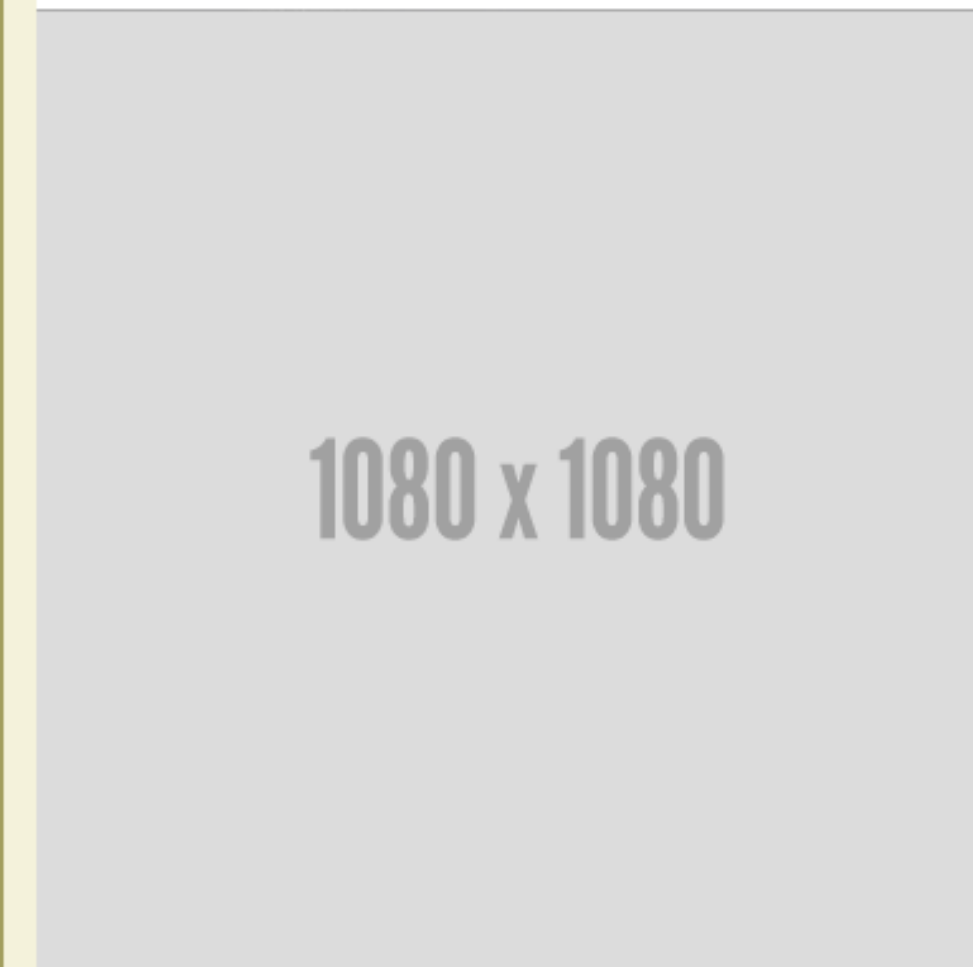


♥ XXXXXX likes
thisistheusersinstagramhandle Lorem
ipsum dolor sit amet, consectetur adipisici

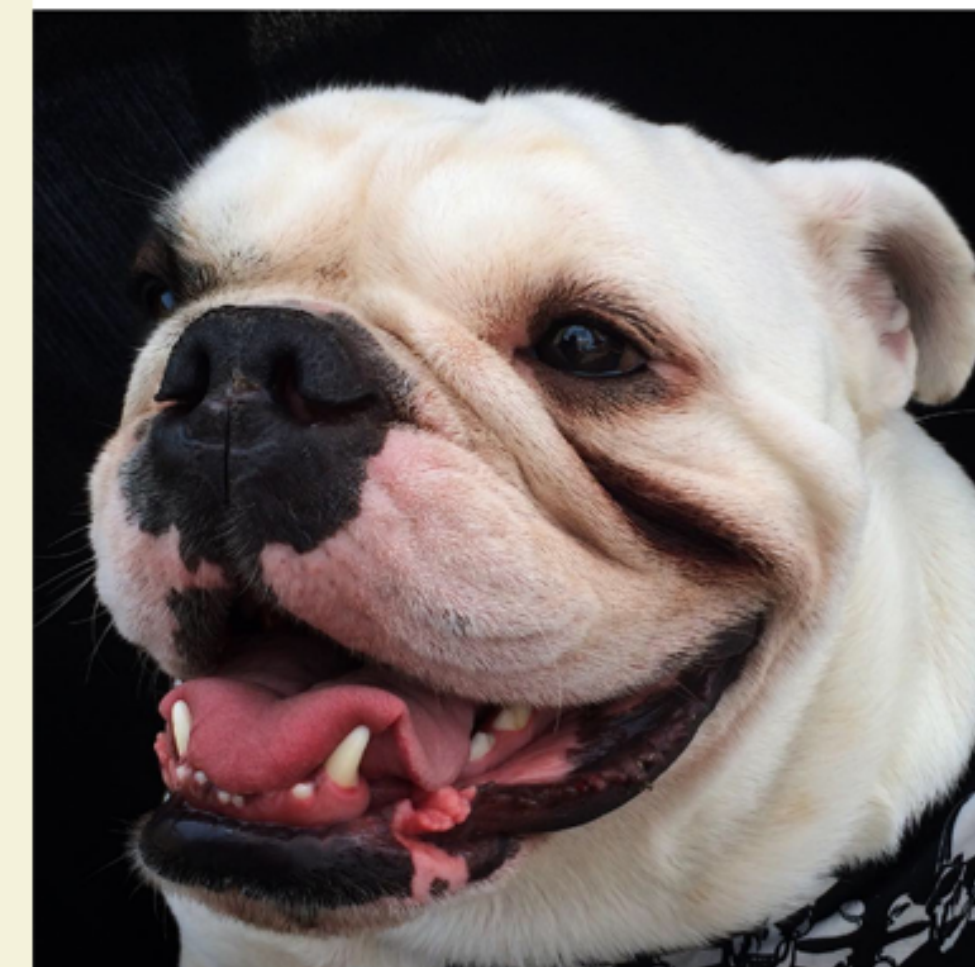


♥ 41 likes
brad_frost Hi!

<http://atomicdesign.bradfrost.com>


Atomic Design

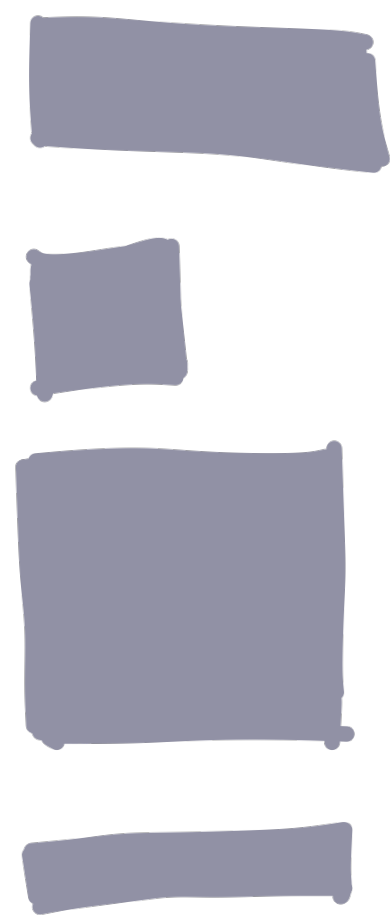

ATOMS

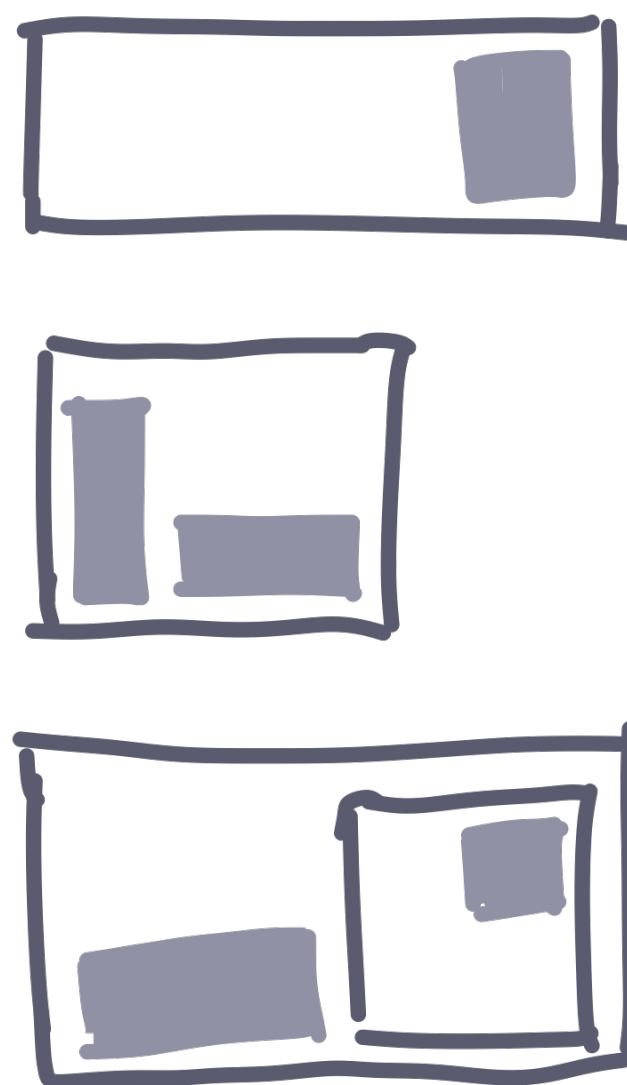

MOLECULES

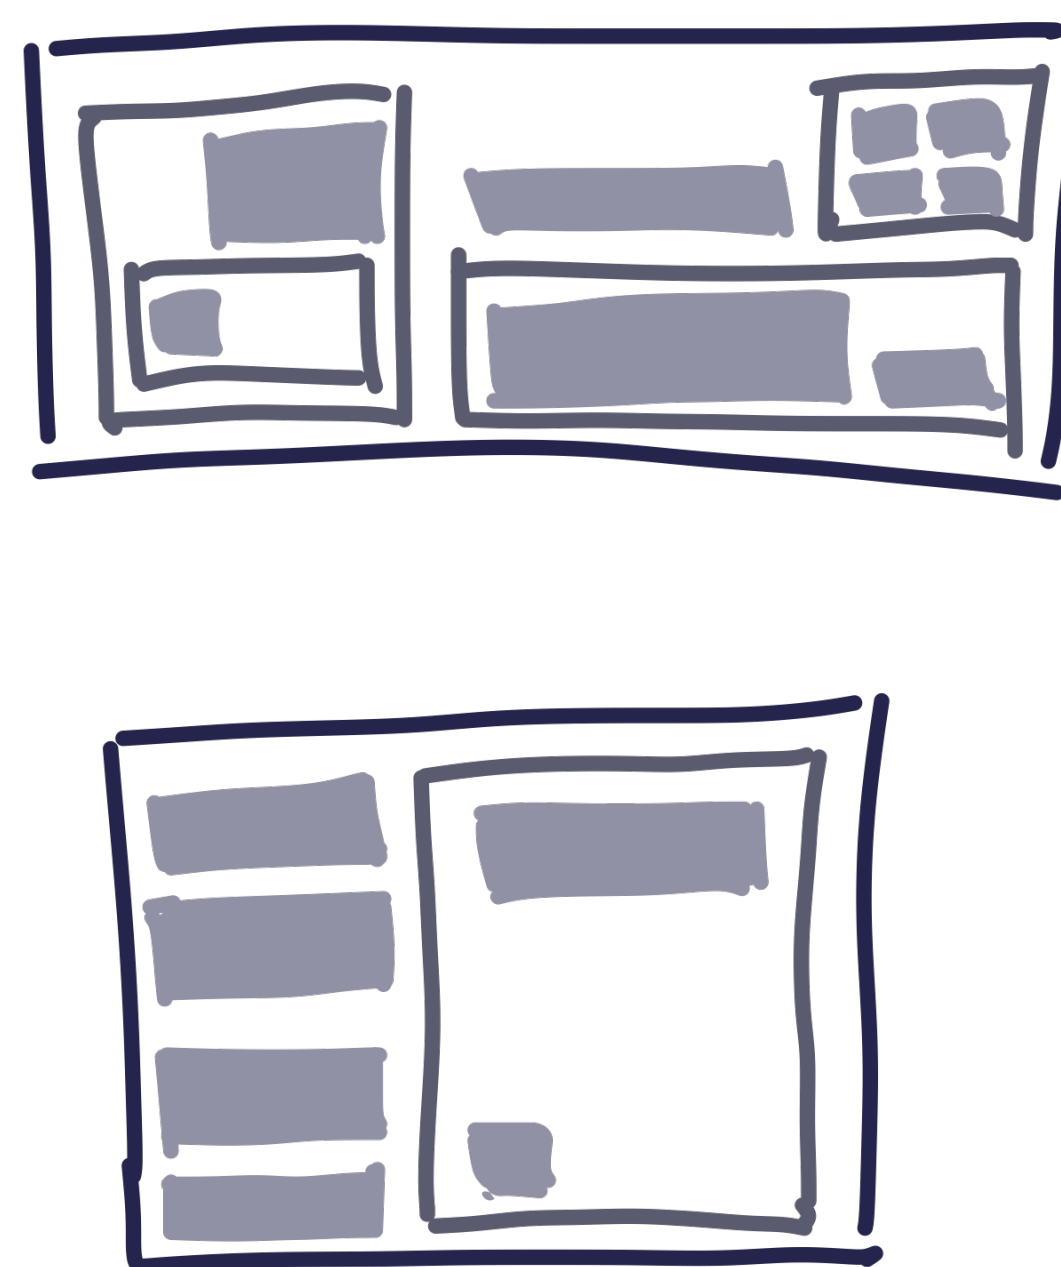

ORGANISMS

×

INNOQ

Living Styleguide

COMPONENTS

▼ Atoms

▼ Input Elements

▼ Alert

Default

Error

Warn

Button

Button Group

Checkbox

Fieldset

► Form Control

► Form Group

► Form Label

Form Text

Legend

Radio

► Media

► Text

► Toggles

Toggle

Alert: Error

READY

Das hat nicht geklappt! Bitte füllen Sie alle Felder aus.

HTML

View

Context

Assets

Info

Notes

<div class="alert alert--error">

<https://innoq.style/components/detail/alert--error.html>

Bestandteile

möglicherweise

JavaScript

Optimiere die UX

vermutlich

CSS

Optimiere das Aussehen

HTML

Mach es Funktional

BLOG

Web-Components

Web-Components

- Erlauben das Definieren von eigenen HTML Elementen
- Set von Web APIs
 - Custom Elements
 - Shadow DOM
 - HTML Template
 - ES Modules (wird im Vortrag nicht behandelt)

BLOG

Custom Elements

Autonomous Custom Element

```
<my-alert type="warn">  
  <h4>Achtung</h4>  
  <p>Etwas schlimmes ist passiert!</p>  
</my-alert>
```

```
class MyAlert extends HTMLElement {  
  ...  
}
```

```
customElements.define('my-alert', MyAlert);
```

Kennen wir das nicht woher?

20

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

<h:form>

<p:dataTable var="car" value="#{dtFilterView.cars}" widgetVar="carsTable"

emptyMessage="No cars found with given criteria" filteredValue="#{dtFilterView.filteredCars}">

<f:facet name="header">

<p:outputPanel>

<h:outputText v

<p:inputText id

</p:outputPanel>

</f:facet>

<p:column filterBy="#{c

<h:outputText value

</p:column>

<p:column filterBy="#{c

<f:facet name="filt

<p:spinner onch

<f:convert

</p:spinner>

</f:facet>

<h:outputText value

</p:column>

<p:column filterBy="#{c

<f:facet name="filt

<p:selectOneMer

<f:selectIt

Search all fields:

Id	Year	Brand	Color	Status	Price
		Select One	Colors	All Sold Sale	
bc640ccf	1983	Mercedes	Maroon	Sale	\$47,392.00
a80cc3fc	1982	Renault	Black	Sale	\$82,466.00
cb7b1158	1988	Ford	Silver	Sale	\$84,917.00
2e1430f7	1998	Jaguar	Black	Sale	\$26,705.00
567c43a8	1985	Honda	Green	Sold	\$48,415.00
474c38ab	1968	Volkswagen	Yellow	Sold	\$29,852.00
69f6d733	1987	Mercedes	Yellow	Sale	\$93,369.00
68372ad8	1988	Volkswagen	Blue	Sold	\$83,726.00
7111c25f	2008	Renault	Black	Sold	\$75,656.00
1fb4d27b	1976	Ford	Brown	Sale	\$97,720.00
contains	lte	exact	in	equals	custom (min)

Customized Built-In Element

```
<a href="/somewhere" is="embeddable-content">  
    Some Link  
</a>
```

```
class EmbeddableContent  
    extends HTMLAnchorElement {  
    ...  
}
```

```
customElements.define('embeddable-content',  
    EmbeddableContent, {extends: 'a'});
```

Custom Element API

- `constructor()`
// instance is created
- `connectedCallback()`
// instance is inserted into DOM
- `disconnectedCallback()`
// instance is removed from DOM
- `attributeChangedCallback(attrName, oldVal, newVal)`
// one of observed attributes changed -> static `get observedAttributes()`
- `adoptedCallback()`
// instance is adopted via `document.adoptNode(el)`

Can I use custom elements ? Settings

4 results found

Custom Elements (V1) - LS

Usage % of all users  ?
Global 73.69% + 15.24% = 88.93%

Method of defining new HTML tags.

Current aligned Usage relative Date relative Apply filters Show all ?

IE	Edge*	Firefox	Chrome	Safari	Opera	iOS Safari*	Opera Mini*	Android Browser*	Opera Mobile*	Chrome for Android	Firefox for Android	UC Browser for Android	Samsung Internet	QQ Browser	Baid Browser
		2-49													
		^{2 1} 50-58	4-53										4		
		^{3 1} 59-62	¹ 54-66	3.1-10	10-40	3.2-10.2							¹ 5.4		
6-10	12-17	63-68	67-76	¹ 10.1-12.1	¹ 41-60	¹ 10.3-12.3		2.1-4.4.4	12-12.1				6.2-8.2		
11	18	69	77	¹ 13	¹ 62	¹ 13	all	76	¹ 46	76	68	12.12	9.2	1.2	¹ 7.1
	76	70-71	78-80	¹ 13.1-TP		¹ 13.1									

- Notes
- Known issues (0)
- Resources (11)
- Feedback

BLOG

Shadow DOM

Shadow DOM

- Ermöglicht stärkere Kapselung der Komponente

```
this.attachShadow({mode: 'open'});
```

oder

```
this.attachShadow({mode: 'closed'});
```

Shadow DOM (V1) 📄 - WD

Usage

% of all users ⬆ ?

Global

76.09% + 13.16% = 89.25%

Method of establishing and maintaining functional boundaries between DOM trees and how these trees interact with each other within a document, thus enabling better functional encapsulation within the DOM & CSS.

Current aligned		Usage relative		Date relative		Apply filters		Show all		?					
IE	Edge *	Firefox	Chrome	Safari	Opera	iOS Safari *	Opera Mini *	Android Browser *	Opera Mobile *	Chrome for Android	Firefox for Android	UC Browser for Android	Samsung Internet	QQ Browser	Baid Brow
		2-57													
		2 58											4		
		3 59-62	4-52	3.1-9.1	10-39	3.2-9.3							5.4		
6-10	12-17	63-68	53-76	1 10-12.1	40-60	1 10-12.3		2.1-4.4.4	12-12.1				6.2-8.2		
11	18	69	77	1 13	62	1 13	all	76	46	76	68	12.12	9.2	1.2	7.1
	76	70-71	78-80	1 13.1-TP		1 13.1									

Notes

Known issues (0)

Resources (8)

Feedback

MS Edge status: In Development

¹ Certain CSS selectors do not work (`:host > .local-child`) and styling slotted content (`::slotted`) is buggy.

² Enabled through the `dom.webcomponents.enabled` preference in `about:config`.

³ Enabled through the `dom.webcomponents.shadowdom.enabled` preference in `about:config`.

BLOG

HTML Template

HTML Template

- Ermöglicht User ein Template anzugeben das von der Komponente verwendet wird

```
<template id="alert">
  <slot name="title"><h1>Achtung</h1></slot>
  <slot name="text"><p>Es passiert!</p></slot>
  <p>Ihnen wird nichts passieren.</p>
</template>
```

HTML templates - LS

Usage

% of all users  ?

Global

94.2% + 0.24% = 94.44%

Method of declaring a portion of reusable markup that is parsed but not rendered until cloned.

Current aligned	Usage relative	Date relative	Apply filters	Show all	?										
IE	Edge *	Firefox	Chrome	Safari	Opera	iOS Safari *	Opera Mini *	Android Browser *	Opera Mobile *	Chrome for Android	Firefox for Android	UC Browser for Android	Samsung Internet	QQ Browser	Baid Browser
				3.1-6											
				³ 6.1											
	12		4-25	7	10-12.1	3.2-7.1									
	^{1 2} 13-14	2-21	¹ 26-34	^{1 2} 7.1-8	¹ 15-21	^{1 2} 8-8.4		2.1-4.3							
6-10	15-17	22-68	35-76	9-12.1	22-60	9-12.3		4.4-4.4.4	12-12.1				4-8.2		
11	18	69	77	13	62	13	all	76	46	76	68	12.12	9.2	1.2	7.1
	76	70-71	78-80	13.1-TP		13.1									

Notes

Known issues (0)

Resources (8)

Feedback

¹ Does not support Document.importNode on templates, nested templates or elements that contain templates.

² Does not support Node.cloneNode on templates, nested templates or elements that contain templates.

³ Safari 6.2 has the same partial support as Safari 7.1.

Danke! Fragen?



Michael Vitz
michael.vitz@innoq.com
+49 151 19116015
@michaelvitz

<https://www.innoq.com/de/articles/2019/02/web-components/>

innoQ Deutschland GmbH

Krischerstr. 100
40789 Monheim am Rhein
Germany
+49 2173 3366-0

Ohlauer Str. 43
10999 Berlin
Germany
+49 2173 3366-0

Ludwigstr. 180E
63067 Offenbach
Germany
+49 2173 3366-0

Kreuzstr. 16
80331 München
Germany
+49 2173 3366-0

Hermannstrasse 13
20095 Hamburg
Germany
+49 2173 3366-0

innoQ Schweiz GmbH

Gewerbestr. 11
CH-6330 Cham
Switzerland
+41 41 743 0116