


1067 Temporary Power Distribution Unit

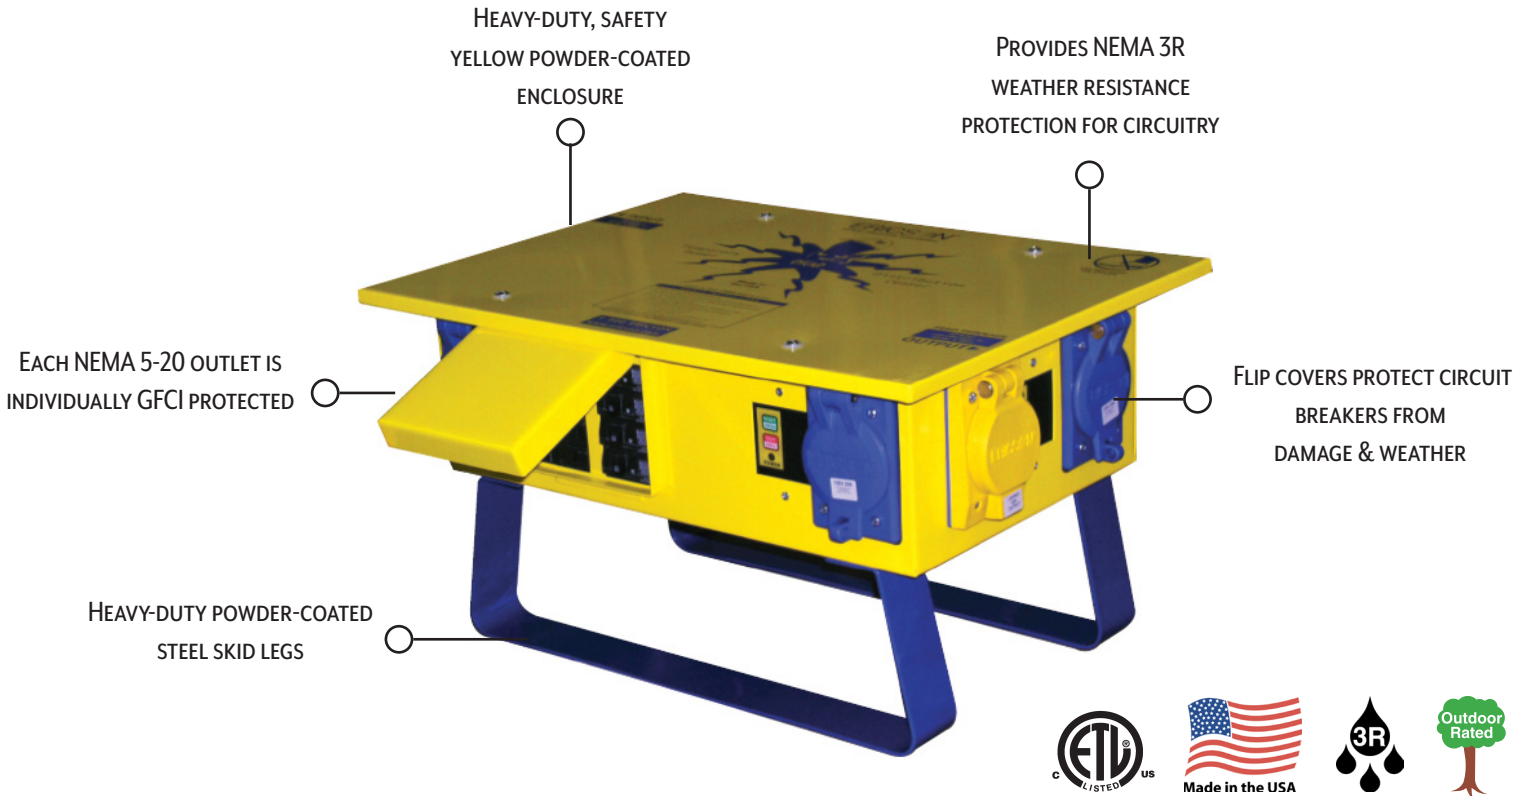

Other Standard Features:

- Each NEMA 5-20 outlet is individually GFCI protected
- Flip seal covers are labeled for quick identification of electrical ratings
- Automatic power-up GFCIs are ready immediately. Only need to push reset after a trip
- CS6375 50Amp, 125/250V power inlet
- Power inlet/outlet clearly marked on lid for quick identification
- Unit is field repairable by qualified personnel. Parts list and wiring diagram appear on underside of lid

Applications:

- Public Events
- Convention Centers
- General Maintenance
- Stadiums
- Industrial Construction
- Commercial Construction

Accessory Selection Guide

Catalog Number	Description	Image Reference
63DSO/63BSO ¹	Cord set, 100' or 50' #6/3-8/1 SO 50A 125V/250V	A
SR50	Power outlet receptacle in weatherproof box with lift cover and 24" leads 50A, 125V/250V	B
63YSTW	50Amp "Y" adapter	C
123-XX	Various 20Amp cordsets	D



¹ - Also available as a secondary cable assembly - cord with connecroe onlt - to hard wire into your power source

Selection Guide

Main Features

Catalog Number	Electrical Rating	Enclosure	Environmental/NEMA Rating	Main Power Inlet	Inlet Flip Cover	Main Power Outlet (Mains Feed-thru)	Mains Feed Thru Flip Cover	Weight (lbs.)	Dimensions (L x W x H)
1067-LC	50A 125/250V 6250/12500W	Steel Welded Powder Coated	Indoor/Outdoor 3R	4W CS6375 (50A, 125/250V)	Yes	4W CS6369 (50A, 125/250V)	Yes	35	22.5" x 16.25" x 11.75"
1067-ALC	50A 125/250V 6250/12500W	Steel Welded Powder Coated	Indoor/Outdoor 3R	4W CS6375 (50A, 125/250V)	Yes	4W CS6369 (50A, 125/250V)	Yes	35	22.5" x 16.25" x 11.75"
1067-BLC	50A 125/250V 6250/12500W	Steel Welded Powder Coated	Indoor/Outdoor 3R	4W CS6375 (50A, 125/250V)	Yes	4W CS6369 (50A, 125/250V)	Yes	37	22.5" x 16.25" x 11.75"
1067-CLC	50A 125/250V 6250/12500W	Steel Welded Powder Coated	Indoor/Outdoor 3R	4W CS6375 (50A, 125/250V)	Yes	4W CS6369 (50A, 125/250V)	Yes	37	22.5" x 16.25" x 11.75"


Receptacles

Catalog Number	A-Type (6 per box)	GFCI Protection	Overload Protection	Flip Covers	B-Type (1 per box)	240V GFCI Protection	Overload Protection	Flip Covers
1067-LC	NEMA 5-20 T Slot Duplex (125V 20A)	Yes	Yes - 1P 20A C.B. (1 per duplex)	Yes	L6-30 (30A, 250V)	No	Yes - 2P Non-GFCI	Yes
1067-ALC	NEMA L5-20 Locking Single (125V 20A)	Yes	Yes - 1P 20A C.B. (1 per receptacle)	Yes	L6-30 (30A, 250V)	No	Yes - 2P Non-GFCI	Yes
1067-BLC	NEMA 5-20 T Slot Duplex (125V 20A)	Yes	Yes - 1P 20A C.B. (1 per duplex)	Yes	L6-30 (30A, 250V)	Yes	Yes - 2P GFCI	Yes
1067-CLC	NEMA L5-20 Locking Single (125V 20A)	Yes	Yes - 1P 20A C.B. (1 per receptacle)	Yes	L6-30 (30A, 250V)	Yes	Yes - 2P GFCI	Yes

*Contact factory for custom assemblies

*NF models are rated for INDOOR ONLY and do not have flip covers installed

*See our complete list of 50Amp power cords in the cordset section in Ericson's catalog

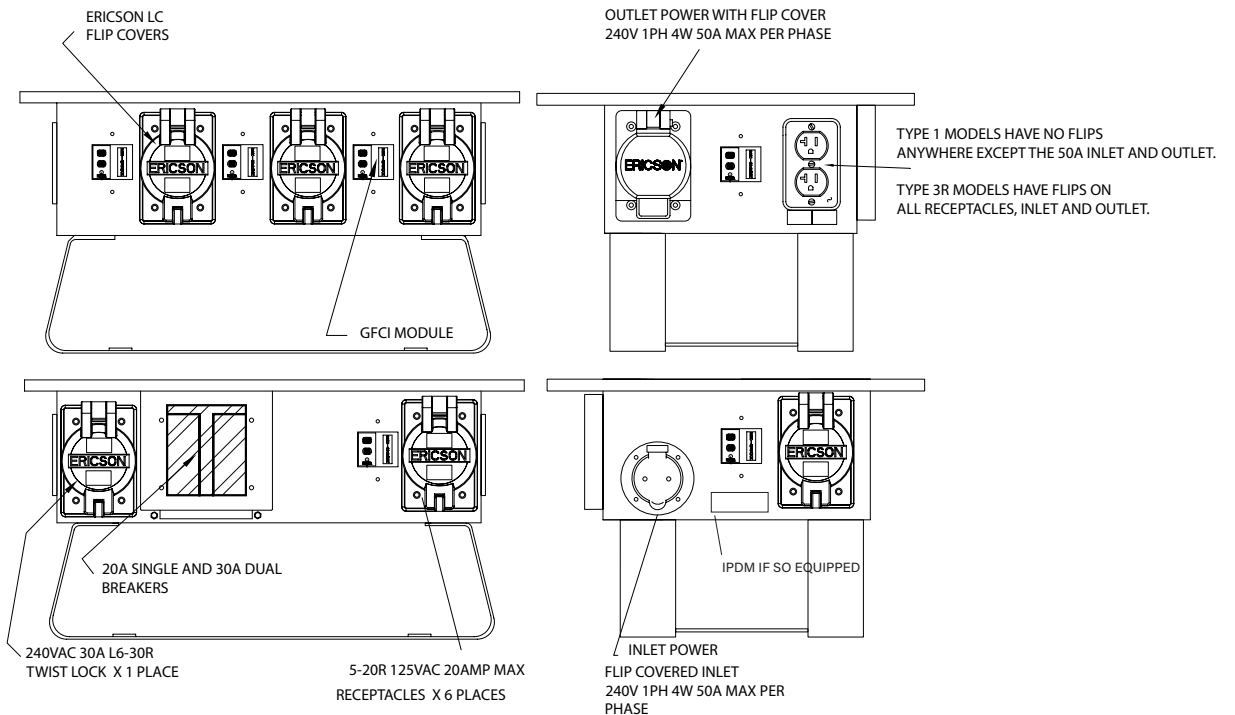

Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1.800.374.2766
info@ericson.com
www.ericson.com
L1000209E