



# OV5

## Homogenizer

---

Versatile homogenizer ideal for dispersing, homogenizing and mixing



# Convenient rotor-stator homogenizer

OV5 is the VELP solution for dispersing, homogenizing and mixing biological tissues, pharmaceutical products, cosmetics and food products. Wide selection of rotors and stators to match multiple applications.

- Stirring volume of up to 8 liters (water) as homogenizer
- Stirring volume of up to 40 liters (water) as high-speed mixer
- Handles fluids up to 10 000 mPa\*s (cP)
- Speed variable from 10 000 to 30 000 rpm
- Shaft connects easily and quickly through a snap hook
- Rotor / stator configuration can be assembled in seconds
- Stainless steel shaft with PTFE seals
- Overload protection
- Smooth start and safety switch



## INSTRUMENT - CODE

<b>OV5</b>	230 V / 50 Hz	<b>R20900010</b>
<b>OV5 - SYSTEM</b>	230 V / 50 Hz	<b>SA20900010</b>

\* Double Rod Mini H-Stand Set, VSS2CSR2 Dispersing tool included

## CONFIGURE WITH ROTOR/STATOR

### HOMOGENIZER



### SHAFT



### STATOR




### ROTOR



## TECHNICAL DATA

CONSTRUCTION MATERIAL	Technopolymer
STIRRING SPEED RPM	Graduated scale
POWER	500 W
POWER SUPPLY	230 V / 50Hz
WEIGHT	1,3 Kg
DIMENSION (WXHXD)	70x255x70 mm (2.7x10x2.7 in)
STIRRING SPEED	From 10000 to 30000 rpm
STIRRING VOLUME MAX (H2O)	Up to 8 litres as homogenizer
STIRRING VOLUME MAX (H2O)	Up to 40 litres as high speed mixer
MAX VISCOSITY (MPA X SEC)	10000

# ROTOR/STATOR CONFIGURATIONS

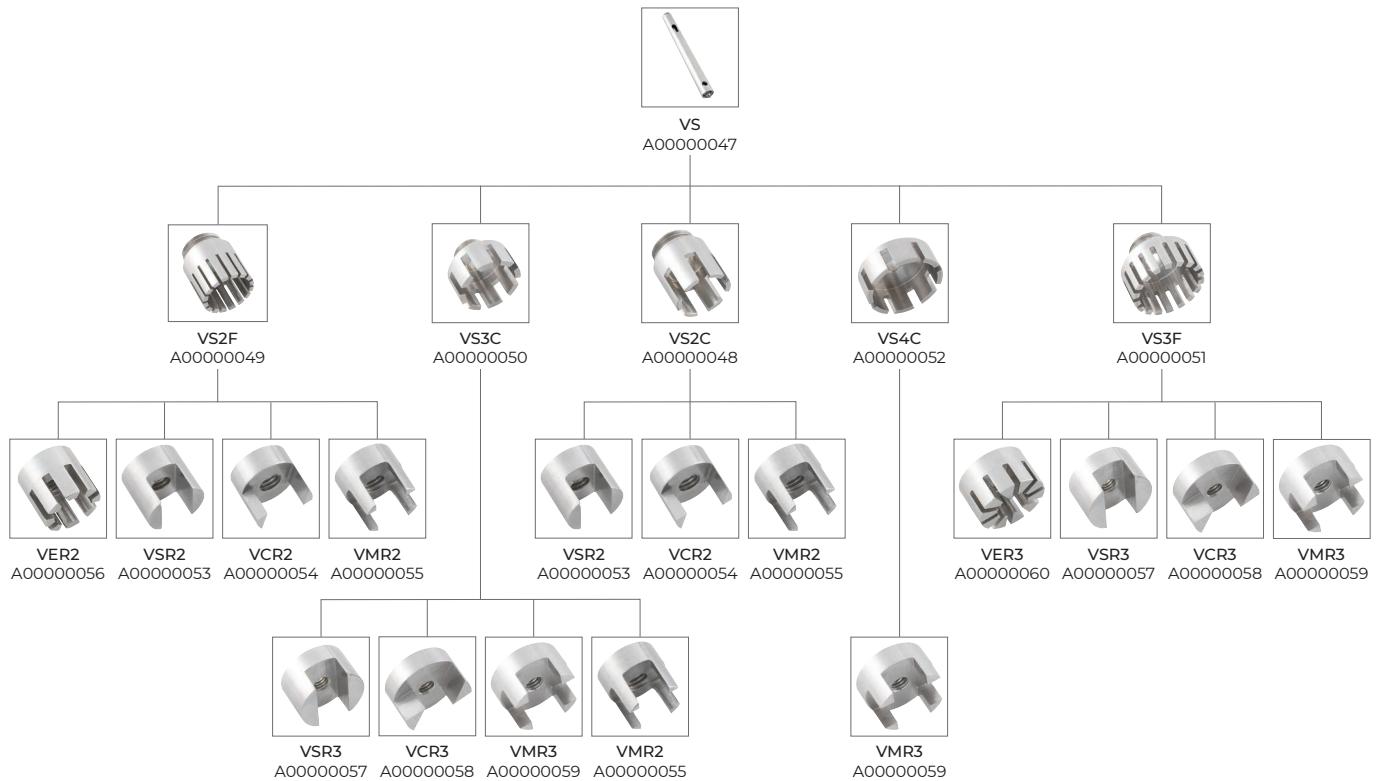

## POSSIBLE COMBINATIONS

	Code No	Application field	Function	Treatable volume (water)	Max circum. speed	Ø Rotor	Ø Stator	Tool length	Min/max immersion depth	Ultimate fineness µm	Suspension emulsion	
*	VSS2CSR2	A00000026	CE, IF, PC, SI	A	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
	VSS2CCR2	A00000027	CT, IA, M, SI	B	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
	VSS2CMR2	A00000028	CE, VE	A	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
*	VSS2FER2	A00000029	CT, IF, SI, VE	C	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
	VSS2FCR2	A00000031	BT, CT, IA, IT, M, SI	B	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-150	1-10
	VSS2FMR2	A00000032	CE, CT, IA, IC, PC, VE	A	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-150	1-10
*	VSS3CSR3	A00000033	CT, IA, IF, M, SI	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3CCR3	A00000034	CT, IA, IF, M, SI	B	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3CMR3	A00000035	CE, VE	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3CMR2	A00000036	CE, IA, SI	D	250-2000	34,9	15 mm	30 mm	220 mm	40/175 mm	High speed mixer	
*	VSS3FER3	A00000037	CT, IF, SI, VE	C	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3FSR3	A00000038	CT, IF, SI, VE	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3FMR3	A00000040	CE, IA, IC, IF, IT	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
*	VSS4CMR3	A00000041	CE, IA, SI	D	1000-4000	34,9	23 mm	40 mm	220 mm	40/175 mm	High speed mixer	
**	VSS5CSR4	A00000046	BT, M	A	0,2-50	6,3	4 mm	5 mm	128 mm	10/60 mm	10-50	1-10

\* Most used model

\*\* The dispersing tool works with Ø 4 mm rotor and Ø 5 mm stator for microbiological applications (e.g. suitable for Eppendorf, cuvettes, etc.)

\*\*\* BT = biotechnology, CE = ceramic industry, CT = paper & tissue industry, IA = food industry, IC = cosmetic industry, IF = pharmaceutical industry, IT = tobacco industry, M = medicine, PC = petrochemistry industry, SI = sewage pollution control, VE = paint industry

\*\*\*\* A = dispersing tool for solid/liquid media, B = dispersing tool with blades for fibrous/stringy materials, C = dispersing tool for water/oil or oil/water emulsions, D = stirring shaft



We reserve the right to make technical alterations  
We do not assume liability for errors in printing, typing or transmission

VELP Official Partner

DESIGNED AND MANUFACTURED IN ITALY



ITALY - HQ  
Via Stazione 16  
20865 Usmate (MB) Italy  
Tel. +39 039 628811  
velpitalia@velp.com

INDIA  
velpindia@velp.com

USA  
155 Keyland Court, Bohemia  
NY 11716 - U.S.  
Tel. +1 631 573 6002  
velpusa@velp.com

CHINA  
Xinlong Rd Building 28, Lane 1333  
Shanghai city - China  
Tel. +86 18017557329  
velpchina@velp.com