


## 28,000 BTU/H MULTI-ZONE HEAT PUMP SYSTEM

SUBMITTAL COVER SHEET

PROJECT NAME	
LOCATION	
ARCHITECT	
ENGINEER	
CONTRACTOR	
REFERENCE	
SUBMITTED BY	DATE

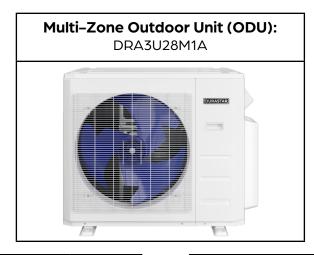

CAPACITIES		DUCTLESS	DUCTED
	Rated <sup>1</sup>	27000	24000
Cooling Capacity (BTU/hr)	Minimum	6000	8400
(610/111)	Maximum	32700	31000
	Rated <sup>2</sup>	28000	24000
Heating Capacity (BTU/hr)	Minimum	6010	7100
(	Maximum	37200	35000

EFFICIENCY DATA	DUCTLESS	DUCTED
SEER	22.0	21.0
EER	12.0	11.0
HSPF	9.8	10.0

### **PRODUCT FEATURES**

- Variable Speed Inverter Compressor
- Included Base Pan Heater
- Auto Restart

OUTDOOR TEMPERATURE OPERATION		
Cooling	-13 °F - 122 °F (-25 °C - 50 °C)	
Heating	–13 °F – 86 °F (–25 °C – 30 °C)	

ELECTRICAL DATA	DUCTLESS	DUCTED
Voltage/Phase/Frequency	208–230V, 1 Phase, 60 H	
Voltage Range	187-253V	
Recommended Breaker (Amps)	35	
Minimum Circuit Ampacity (Amps)	25	
Minimum Wire Size	16 AWG	
Rated Current – Cooling (Amps) <sup>1</sup>	9.7	11.1
Rated Current – Heating (Amps) <sup>2</sup>	9.1	9.8

 $<sup>^{1}\</sup>mbox{Measured}$  at 95 °F.

 $<sup>^2</sup>$  Measured at 47 °F.







# 28,000 BTU/H MULTI-ZONE HEAT PUMP SYSTEM

SPECIFICATIONS - DRA3U28M1A

SYSTEM DATA	
Refrigerant Type	R-410A
Refrigerant Charge (oz.)	98.8
Oil Type	VG74
Oil Charge (oz.)	22.65 (670 ml)
Design Pressure (PSIG)	550/340

LINE SET REQUIREMENTS		
Connection Type	Flare	
Liquid	3 x Ø1/4" (Ø6.35mm)	
Gas	3 x Ø3/8" (Ø9.52mm)	
Pre-Charge Length	74'	
Maximum Length (all indoor units)	197'	
Maximum Length (one indoor unit)	98'	
Minimum Length (one indoor unit)	10'	
Max. Height Differential between indoor and outdoor unit	49'	
Max. Height Differential between indoor units	33'	
Additional Refrigerant (oz/ft)	0.16	

OUTDOOR UNIT FAN DATA		
	Low	600
Speed (r/min)	Medium	750
	High	900
Туре	DC	
RLA (A)	1.39	


SOUND PRESSURE (dB(A))	
Airflow (CFM)	2129
Sound Pressure (dB(A))	63.4


OUTDOOR UNIT DIMENSIONS		
	Width	37 1/4"
Unit Dimensions	Depth	16 1/8"
	Height	31 7/8"
	Width	42 5/8"
Carton Dimensions	Depth	19 1/2"
	Height	34 13/16"
Net Weight	152.1 lbs.	
Gross Weight	160.9 lbs.	





## 28,000 BTU/H MULTI-ZONE HEAT PUMP SYSTEM

ODU DIMENSIONS - DRA3U28M1A

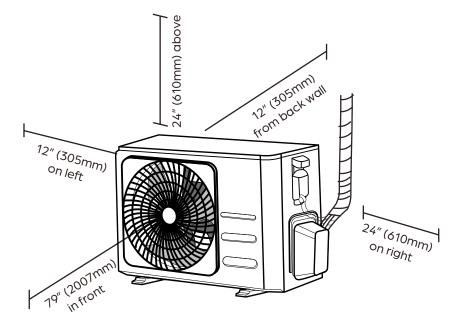

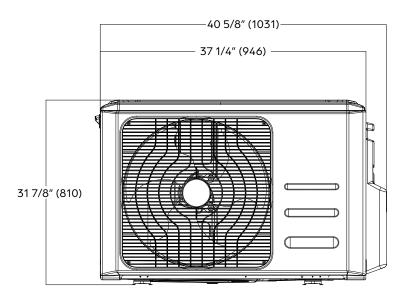



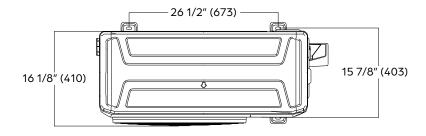



#### NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini–split equipment may vary slightly.