

SUBMITTAL COVER SHEET

PROJECT NAME	
ENGINEER	
CONTRACTOR	
REFERENCE	
SUBMITTED BY	

Indoor Unit (IDU): DRAF24F1A	Outdoor Unit (ODU): DRA1U24S1A	Wireless Remote Control

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated <sup>1</sup>	24000
	Minimum	7600
	Maximum	25200
Heating Capacity (BTU/hr)	Rated <sup>2</sup>	24000
	Minimum	7700
	Maximum	30000

EFFICIENCY DATA		
SEER	20.0	
EER	12.5	
HSPF	11.0	

#### **PRODUCT FEATURES**

- Wireless Remote Control with "Follow Me" Technology
- Variable Speed Inverter Compressor
- Auto Restart
- Auto Changeover
- 24-hour Timer
- Self Clean Function

OUTDOOR TEMPERATURE OPERATION		
Cooling	–13 °F – 122 °F (–25 °C – 50 °C)	
Heating	–13 °F – 86 °F (–25 °C – 30 °C)	

ELECTRICAL DATA	
Voltage/Phase/Frequency	208–230V, 1 Phase, 60 Hz
Voltage Range	187-253V
Recommended Breaker (Amps)	25
Minimum Circuit Ampacity (Amps)	18
Minimum Wire Size	16 AWG
Rated Current – Cooling (Amps) <sup>1</sup>	8.78
Rated Current - Heating (Amps) <sup>2</sup>	8.44

<sup>&</sup>lt;sup>1</sup>Measured at 95 °F.

 $<sup>^2</sup>$  Measured at 47 °F.









**SPECIFICATIONS** 

SYSTEM DATA	
Refrigerant Type	R-410A
Refrigerant Charge (oz.)	82.9
Oil Type	Ester Oil VG74
Oil Charge (oz.)	22.7 (670 ml)
Design Pressure (PSIG)	550/340

LINE SET REQUIREMENTS		
Connection Type	Flare	
Liquid	Ø3/8" (Ø9.52mm)	
Gas	Ø5/8" (Ø16mm)	
Pre-Charge Length	25'	
Minimum Length	10'	
Maximum Length	164'	
Maximum Height Differential	82'	
Additional Refrigerant (oz./ft)	0.32	

FAN DATA		
Indoor Unit Air Flow (CFM)	Low	598
	Medium	708
	High	759
Moisture Removal (Pints/hr) 3.51		
Drain Port O.D. / Drain Hose I.D.	Ø1" (Ø25mm)	


SOUND PRESSURE (dB(A))		
Indoor Unit	Low	42
	Medium	48
	High	53
Outdoor Unit	61	


INDOOR UNIT DIMENSIONS		
Unit Dimensions	Width	42 1/16"
	Depth	9 1/4"
	Height	26 9/16"
Carton Dimensions	Width	45 1/16"
	Depth	12 1/2"
	Height	29 3/4"
Net Weight	60.6 lbs.	
Gross Weight	72.1 lbs.	

OUTDOOR UNIT DIMENSIONS		
Unit Dimensions	Width	37 1/4"
	Depth	16 1/8"
	Height	31 7/8"
Carton Dimensions	Width	42 15/16"
	Depth	19 11/16"
	Height	34 13/16"
Net Weight	141.1 lbs.	
Gross Weight	152.1 lbs.	




IDU DIMENSIONS - DRAF24F1A

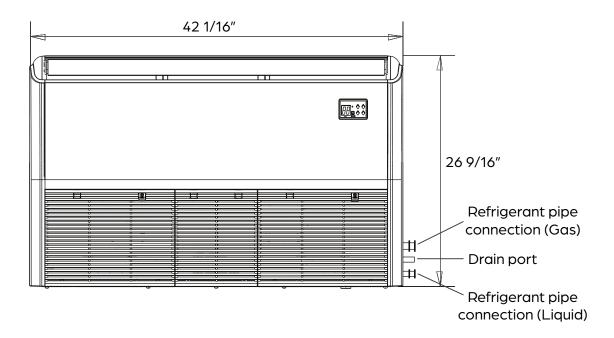


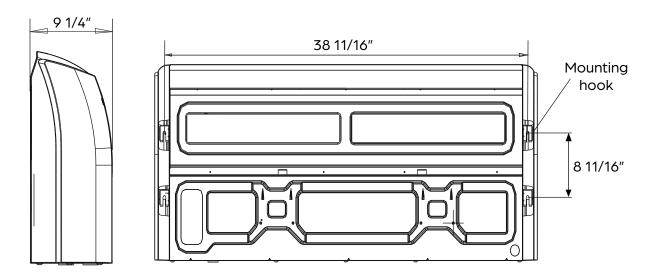





ODU DIMENSIONS - DRA1U24S1A

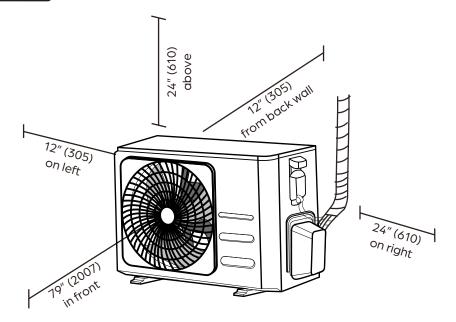

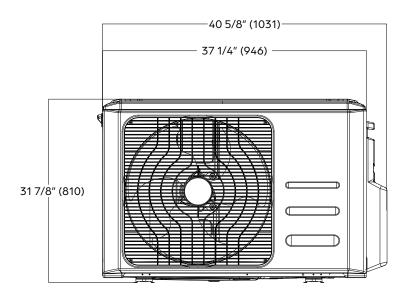



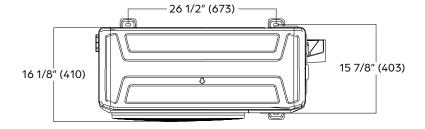



### NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini–split equipment may vary slightly.