

# Electrical high lift truck BUDGET-S BUDGET-S





## Why BUDGET-S?

The Pallit electric high lift truck BUDGET-S is our low cost electric high lift truck. It is ideal for shorter transport and picking operations of goods up to 1200 kg. The maximum lifting height is 2500 mm. The mast rises during the lifting process.

- Ideal entry-level model due to strong price-performance ratio
- Waterproof control unit protects against cold, dust, and moisture: for temporary use in cold rooms and production halls
- Ergonomic tiller handle for userfriendly control

- Two integrated maintenance-free 12V gel batteries
- Charging is done by plugging into conventional 230 V outlet
- Manoeuvrable model for small storage and production areas
- Smooth-running polyurethane tires: abrasion-resistant and with good ground grip



## **Technical data**


Electrical high lift truck BUDGET-S

#### **DIMENSIONS**

Fork length	1150 mm	1
Width	795 mm	b1
Length	1755 mm	
Height	1744 mm	
Total maximum height	2924 mm	h1
Outer fork with	570 mm	b5
Ground clearance	24 mm	
Distance between forks	230 mm	
Height from ground	86 mm	
Height of drawbar	1221 mm	
Individual fork width	160 mm	е
Centre of gravity	600 mm	С
Turning radius	1366 mm	Wa
Min. aisle width (EPAL1 Euro pallets)	2034 mm	Ast

#### **GENERAL INFORMATION**

Load capacity	1200 kg
Material	Steel
Weight	450 kg
Type of brakes	Electromagnetic
Sound pressure level according to EN 12053	70 db(A)

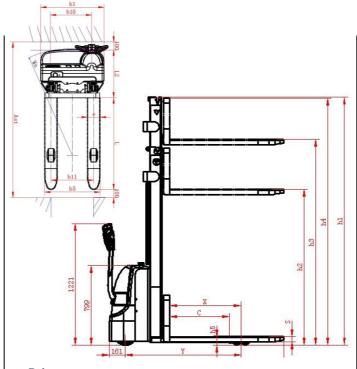

#### **Drive**

Type of drive	Electric motor
Rising capacity, unloaded	8 %
Rising capacity, loaded	6 %
Motor output, drive	0.75 kW
Drive speed unloaded	4.2 km/h

#### **BATTERY**

Battery type	Gel
Operating period	4 h
Charging time	6 h
Battery weight	54 kg

Battery capacity	100 Ah
Battery voltage	12 V
Battery level display	Yes
Number of batteries	2
Charger	Including, internal

#### LIFT

Lifting height (h3)	2500 mm
Lifting type	Electrical hydraulic
Lifting speed, loaded	0.095 m/s
Lifting speed, unloaded	0.13 m/s
Motor output, lift	2.2 kW

#### **TYRES**

Material of tyres	Polyurethane (PU)
Casters	Tandem
Width of casters	70 mm
Diameter of casters	80 mm
Width of swivel casters	70 mm
Diameter of casters	210 mm

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Details to our manufacturer warranty available under Declaration of warranty. The platform trolley complies with the EC Safety regulations.



# **Images**

# Electrical high lift truck BUDGET-S
















### **Images**

Electrical high lift truck BUDGET-S





# Why Pallit?

- Delivery free of charge within 1-3 workdays
- o 100 days right of return
- Five year basic warranty for all platform trolleys
- Live-long first aid in case of technical disruption
- o On-site repair service available



 ${\tt Questions?}\ {\tt Contact}\ {\tt our}\ {\tt product}\ {\tt experts}.$ 

© 0800 - 000 96 25