

Electric stacker DOUBLE-L



Why the DOUBLE-L?

The DOUBLE-L electric pallet truck from Pallit is a professional model and perfectly suited for industrial use. The initial lift enables two pallets to be picked up at the same time, thus optimizing logistics processes. Loads of up to 1600 kg can be transported with ease

- **Three options:** Lifting heights from 3.4 m to 4.5 m
- Powerful 270 Ah **lead batteries** for long operating times and lateral removal
- Wear-free braking thanks to the **electromagnetic braking system**
- With **multifunction display** for battery status and operating hours overview

- With **free-lift function** so that the overall height does not change - ideal for low rooms or containers
- Transport two pallets simultaneously thanks to **initial lift**
- **High maneuverability** due to small size and steering radius
- **External charger included:** Included and compatible with any normal 230V
- Strong and efficient - even in the long term: that's why we offer our **Plus Guarantee for 5 years**

Technical data

Electric stacker DOUBLE-L


OPTIONS Choose between

1 | 2

Lifting height (h3)	3.4 4 4.5 m
Max. Total height (h4)	3880 4480 5080 mm
Min. total height (h1)	1708 1908 2108 mm
Free stroke (h2)	1120 1320 1520 mm

DIMENSIONS

Fork length	1150 mm	l
Width	820 mm	b1
Length	2042 mm	l1
Fork width outside	570 mm	b5
Ground clearance	28 mm	m2
Initial stroke	120 mm	h5
Distance between forks	210 mm	
Height from floor	90 mm	h13
Drawbar height	1385 mm	h14
Fork width single	180 mm	e
Load center	600 mm	c
Turning radius	1711 mm	Wa
Min. aisle width (EPAL1 Euro pallet)	2555 mm	Ast

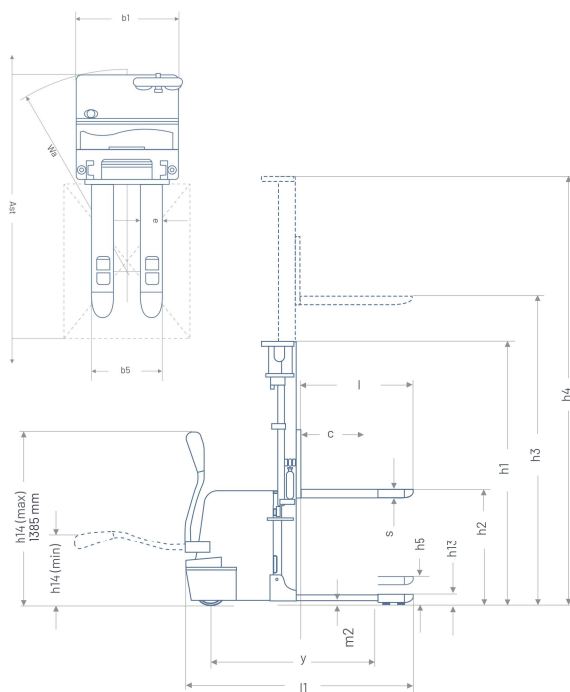

GENERAL

Load capacity	1600 kg
Drive type	Electric
Material	Steel
Travel speed, unloaded	6 km/h
Brake type	Electromagnetic
Sound pressure level according to EN 12053	70 db(A)

BATTERY

Battery type	Lead-acid
Weight of the battery	230 kg
Battery capacity	270 Ah
Number of batteries	1
Battery level indicator	Yes
Operating time	4 hours
Battery voltage	24 V
Charger	External, included

LIFT

Lift	Electric hydraulic
Lifting speed, unloaded	0.20 m/s
Engine power, stroke	3.2 kW

TREATMENT

Tire material	Polyurethane (PU)
Castors	Tandem
Wide castors	84 mm
Diameter of the rollers	80 mm
Wide swivel castors	70 mm
Castor diameter	250 mm

We are constantly improving our products. For this reason, technical data may change without prior notice. Wear parts, rechargeable batteries and batteries are excluded from our manufacturer's "Plus Warranty" - details can be found in our warranty statement. The pallet truck complies with EU safety regulations.


Pictures

Electric stacker DOUBLE-L



Pictures

Electric stacker DOUBLE-L

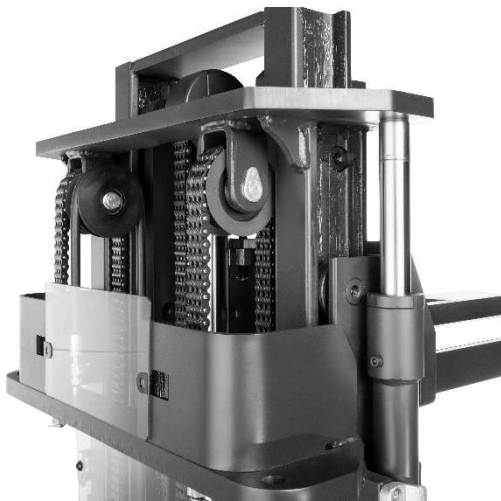

Why Pallit?

- **Free delivery in 1-3 working days**
- **100-day return policy**
- **First aid for technical issues for life**
- **On-site repair service available**



Questions? Talk to our product experts.

📞 0800 - 000 96 25