

## Electric pallet truck ULTRA-S



### Why the ULTRA-S?

Like all our electric pedestrian stackers in the ULTRA series, the ULTRA-S is a robust, versatile solution for pedestrian operation. It is ideal for storing and retrieving heavy pallets at great heights. The ULTRA-S has the smallest load capacity, performance and equipment of the series, but also the lowest price.

- **Two options** to choose from: The ULTRA-S is available with a lifting height of 4.0 m and 4.5 m
- **Maintenance-free 24V/120Ah gel battery** for several hours of use
- **Perfect use for 2-3 hours**
- **No forklift license** required for operation



- **Regenerative, electromagnetic braking system**
- Thanks to **the battery level indicator**, the operator can always keep an eye on the battery level
- **Integrated charging cable** for flexible charging
- **Free-lift function** raises forks up to 1410 / 1570 mm without changing the overall height
- The hard-wearing **polyurethane (PU) tires** are durable and quiet
- Strong and efficient - even in the long term: that's why we offer our **Plus Guarantee for 5 years**

## Technical data

### ULTRA-S electric pallet truck


#### OPTIONS Choose between

1 | 2

Lifting height (h3)	4.0   4.5 m
Max. Total height (h4)	4530   5030 mm
Min. total height (h1)	1890   2050 mm
Free stroke (h2)	1410   1570 mm
Weight	1085   1125 kg

#### DIMENSIONS

Fork dimensions	60x180x1150	s/e/l
Width	816 mm	b1
Length	1967 mm	l1
Fork width outside	570 mm	b5
Ground clearance	26 mm	m2
Distance between forks	210 mm	
Height from floor	90 mm	h13
Drawbar height min./max.	670 / 1300 mm	h14
Load center	500 mm	c
Turning radius	1491 mm	Wa
Min. aisle width (EPAL1 Euro pallet)	2353 mm	Ast

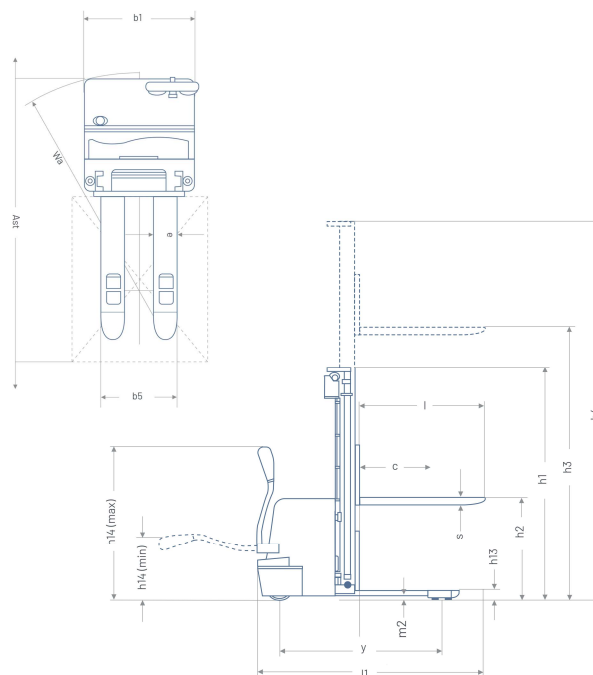

#### GENERAL

Load capacity	1200 kg
Drive type	Electric
Travel speed, unloaded	5.6 km/h
Climbing ability, loaded	6%
Climbing ability, unloaded	15 %
Material	Steel
Brake type	Electromagnetic
Sound pressure level according to EN 12053	70 db(A)

#### BATTERY

Battery type	Gel
Weight of the battery	63 kg
Battery capacity	120 Ah
Battery level indicator	Yes
Operating time	2-3 hours
Battery voltage	24 V
Charger	Internal, inclusive

#### LIFT

Type of stroke	Electric hydraulic
Lifting speed, unloaded	0.13 m/s
Motor power	2.2 kW

#### TREATMENT

Tire material	Polyurethane (PU)
Castors	Tandem
Wide castors	70 mm
Diameter of the rollers	80 mm
Wide swivel castors	70 mm
Castor diameter	250 mm

We are continuously improving our products. For this reason, technical data may change without prior notice. Wear parts, rechargeable batteries and batteries are excluded from our manufacturer's "Plus Warranty" - details can be found in our warranty statement. The pallet truck complies with EU safety regulations.

## Pictures

ULTRA-S electric pallet truck



ULTRA-S			
4500	500	425	375
4000	600	550	425
3500	800	700	600
3300	900	800	700
2500	1200	1075	950
	500	600	700

## Why Pallit?

- **Free delivery in 1-3 working days**
- **100-day return policy**
- **First aid for technical issues for life**
- **On-site repair service available**



Questions? Talk to our product experts.

📞 0800 - 000 96 25