


ORDERING INFORMATION

Order code: 61509
 Description: EMH0039/120-277/BLS/STD
 UPC: 69549615090

SPECIFICATIONS


Ballast type: Electronic HID
 Lamp type: 39 W CMH
 Input voltage (V): 120-277 V
 Input frequency (Hz): 50/60 HZ
 ANSI code: M130
 Max. Case Temp: 75 °C
 Min. Case Temp: -20 °C
 Safety approval: 61509

WIRING DIAGRAM

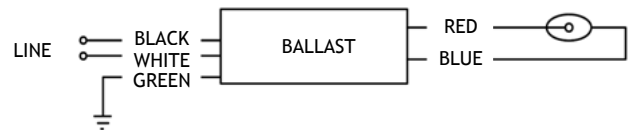


Lamp Number	Lamp Watts	Volts	Line Current	Input power	Regulation	Power Factor	THD %	Max. distance to lamp	Lamp current crest factor
		(V)	(A)	(W)				(ft)	
1	39	120	0.37	44	± 5%	> 0.95	< 15%	0.90	< 1.4
		277	0.17						

HOT SPOT LOCATION

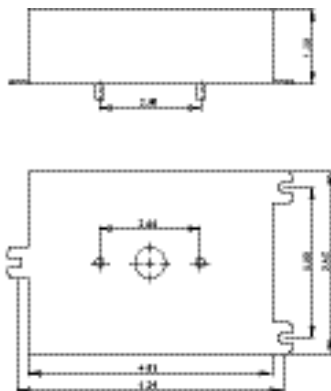

BALLAST DIMENSIONS

Length (L)	4.85" (12.32 cm)
Width (W)	3.62" (9.20 cm)
Height (H):	1.50" (3.81 cm)
Mounting Length	5.29" (13.47 cm)
Mounting Width	3" (7.62 cm)



This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 April 6, 2015