ADJUSTABLE CLEANOUT FINISH FIXTURE

834 SERIES

FinishLine™

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 834 Series FinishLine finish fixture for adjustable cleanout system shall be used where necessary in drainage systems. Finish Fixture shall allow adjustment of 1.25" after the concrete pour when used with FinishLine rough-in fixtures. Scoriated cover shall meet all applicable load requirements for intended use.
Designed in accordance with ASME A112.6.3

MATERIALS

Ring/cover: Nickel-bronze, 304 Stainless steel, Ductile iron
Head adapter: Ductile iron

COVER LOAD RATING

Nickel-Bronze / Stainless Steel: 4,000 lbs. (Medium duty)
Reinforced Nickel-Bronze / Stainless Steel: 15,000 lbs. (Special duty)
Ductile Iron: 6,000 lbs. (Heavy duty)
Reinforced Ductile Iron: 15,000 lbs. (Special duty)

DIMENSIONS


A:	Top diameter - Round / Square	6-1/2" / 6-5/8"
B:	Overall height	2-7/8"
C:	Outlet diameter	4"



834-4DHSR



834-4DHNQ

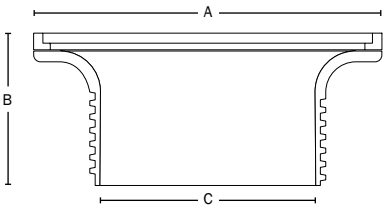

Create Item Number

834-4DH A B

e.g. 834-4DHNRV: FinishLine cleanout finish fixture with round, vandal-resistant, nickel-bronze ring/cover

RING/COVER A

- ☐ **iR** = Round ductile iron
- ☐ **NR** = Round nickel-bronze
- ☐ **NQ** = Square nickel-bronze
- ☐ **SR** = Round stainless steel
- ☐ **SQ** = Square stainless steel

INSTALLED OPTIONS B

- ☐ **V** = Vandal-resistant cover screws
- ☐ **S** = Stamping (specify letters)
- ☐ **C** = Carpet marker
- ☐ **Z** = Complies with BABAA[1]
- ☐ **H** = Reinforced cover - Special Duty

Accessories - Available Separately:
832-S4: Leveling shim kit
832-EX4: Ductile iron extension adapter
832-W: Flexible locating bristle kit

1 Available for round nickel-bronze covers only