


Finishes Pre-Galvanized with Zinc Plated insert nut

Materials Carbon Steel,
Stainless Steel 304SS & 316SS 1/2"- 4" Only

Approvals ULC, UL and FM (3/4" - 8") and complies with:
MSS SP-58 & SP-69 (Type 10)
(Note: approvals do not apply to Stainless Steel)

Recommended for the suspension of non-insulated stationary pipe lines allowing
for vertical adjustment.

Maximum temperature: 450°F

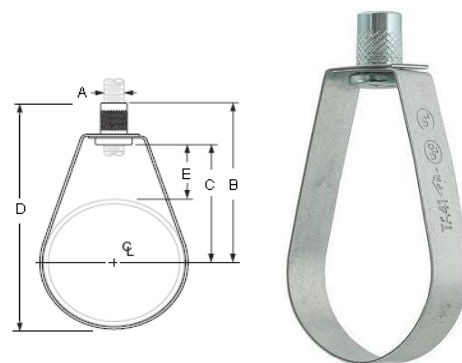

IRON PIPE SIZE	SPECIFICATION DATA					REC. MAX LOAD (LBS)	APP'X WT. PER 100 (LBS)	PC'S PER PKG.
	A	B	C	D	E			
1/2	3/8	2 15/16	1 7/8	3 3/8	1 7/16	400	9	100
3/4	3/8	2 7/8	1 7/8	3 3/8	1 11/32	400	9	100
1	3/8	2 7/8	1 7/8	3 1/2	1 7/32	400	9	100
1 1/4	3/8	3 1/16	1 15/16	3 7/8	1 1/8	400	10	100
1 1/2	3/8	3 3/16	2 1/8	4 1/8	1 3/16	400	11	100
2	3/8	3 7/16	2 7/16	4 5/8	1 1/4	400	12	100
2 1/2	3/8	3 13/16	2 3/4	5 1/4	1 3/8	600	28	50
3	3/8	4	3	5 3/4	1 1/4	600	30	50
4	3/8	4 3/4	3 3/4	7	1 1/2	1000	37	25
5	1/2	6	4 3/4	8 3/4	1 15/16	1000	83	20
6	1/2	6 9/16	5 1/4	9 7/8	1 15/16	1250	95	15
8	1/2	7 13/16	6 5/8	12 1/8	2 5/16	1250	118	10

QWI 4.3.1 Issue Date Oct/19 Rev.7

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at
www.taylorpipesupports.ca

For more information, please contact Customer Service at 1-800-263-8652