MARATHON EQUIPMENT COMPANY

Roll-Off Octagon Compaction Containers

arathon's reliable Octagon Compaction Containers offer you more in features and benefits. The contoured end creates a rolling effect as solid waste is compressed into the container, filling all voids. The result: high density compaction!

Three sizes are available to meet your compaction requirements: *30*, *40*, and *43* cubic yard capacities. Each have clean, smooth sides that make them attractive, easy to clean and easy to handle.

EXTRA design and manufacturing attention is given to key areas most subject to abuse such as: *hinges*, made of 1/2" thick plate; *hinge pins*, 1-1/2" diameter; *structural channel*, reinforces compactor opening; and *rail ends*, inserted with 1-1/4" thick plate.

The octagon shape creates a rolling effect as solid waste is compressed into the container which increases compaction density.



RJ-40 OCVL Value Line Series Compaction Container

Marathon's economically priced Value Line Series Octagon Compaction Container offers

the same features and benefits of the regular line containers but with 11 gauge steel body construction.



Rental & Leasing Programs Available

ROLL-OFF OCTAGON COMPACTION CONTAINERS

Features & Benefits:

- Special attention in design and construction given to the floor, front and door, three areas subject to the most abuse, to ensure strength and long life.
- Floor constructed of 7 gauge steel plate backed with 3" structural steel channel.
- Container sides constructed of 7 gauge steel plate.
- 8 5/8" (219mm) diameter ground rollers.

Α

23'-8 1/2"

7226mm

22'-2"

6756mm

22'-2"

6756mm

22'-2"

7010mm

16'-11 1/2"

5169mm

В

8'-0"

2438mm

8'-0"

2438mm

8'-0"

2438mm

8'-0"

2438mm

8'-0"

2438mm

С

8'-8"

2642mm

8'-8"

2642mm

8'-8"

2642mm

8'-8"

2642mm


8'-8"

2642mm

- Longitudinal sills made of 2" x 6" structural steel tubing.
- Door reinforced with 3" structural steel channels, deep box sections of 7 gauge plate and 3/4" x 4" bar stock hinges.
- Hinges, guide rollers and ground rollers equipped with grease fittings for extended life.
- Understructures available to fit • most roll-off hoists.
- 46 3/8"H x 64" W standard door opening. Other sizes optional.

Automatic Three Position Door Latch

- 1 Unlocked Position
- Automatic Latching Position: 0 When door is closed, latch automatically engages door.



FRONT VIEW

Model No.


RJ-43 OC

RJ-40 OC

RJ-40 OC/VL

RJ-40 OC/XHD

RJ-30 OC

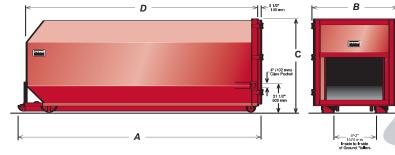

D

22'-5 1/2"

6845mm

20'-11"

6375mm

20'-11"

6375mm

20'-11"

6375mm

15'-5 1/2"

4712mm

Compatible with Marathon's extensive line of compactors and most competitive models.

Options:

- Front Ground Rollers
- Canvas Door Covers
- 1/4" Floor

Authorized Distributor:






MARATHON EQUIPMENT COMPANY

P.O. Box 1798 • Vernon, AL 35592-1798 USA • (205) 695-9105 fax (205) 695-7250 1-800-633-8974 130 Hwy. 339 • Yerington, NV 89447 USA • (775) 463-4030 fax (775) 463-4531 1-800-624-5724 1102 Industrial Park Rd. • Clearfield, PA 16830 USA • (814) 765-0200 fax (814) 765-2072 1-800-922-7062

Visit our web site: www.MarathonEquipment.com

Specifications are subject to change without notice in order to accommodate improvements to the equipment. Pictures in this literature are illustrative only. Products must be used with safe practice and in accordance with said regulations and standards.



Capacity

43 cv

33m³

40 cy

31m³

40 cv

31m³

40 cy

31m³

30 cv

23m³

Max Force

Rate

80.000 lbf

355.8 kN

80.000 lbf

355.8 kN

70,000 lbf

311.3 kN

120.000 lbf

533.7.3 kN

80.000 lbf

355.8 kN

Weiaht

(Approx.)

7200 lb

3266 kg

6700 lb

3039 kg

5600 lb

2540 kg

7900 lb

3583 kg

5500 lb

2495 kg