




SIDE MOUNT BRACKETS

PART NUMBER	SIZE	APPROX HEIGHT	CABLE DIA.		
			0.187	0.25	3mm
CWMPV2418	2"W x 4"D x 18RU	31.5"	79	44	200
CWMPV2440	2"W x 4"D x 40RU	71.8"	79	44	200
CWMPV3418	3"W x 4"D x 18RU	31.5"	125	70	315
CWMPV3440	3"W x 4"D x 40RU	71.8"	125	70	315




Side bracket shown mounted flush. Slide cage nut along slot for additional adjustment.

Removable brackets can be relocated along the duct for more flexibility.




FRONT MOUNT BRACKETS

PART NUMBER	SIZE	APPROX HEIGHT	CABLE DIA.		
			0.187	0.25	3mm
CWMPV2318	2"W x 3"D x 18RU	32"	74	41	185
CWMPV2340	2"W x 3"D x 40RU	70"	74	41	185
CWMPV3318	3"W x 3"D x 18RU	32"	110	61	277
CWMPV3340	3"W x 3"D x 40RU	70"	110	61	277




SIDE BRACKET ASSEMBLY



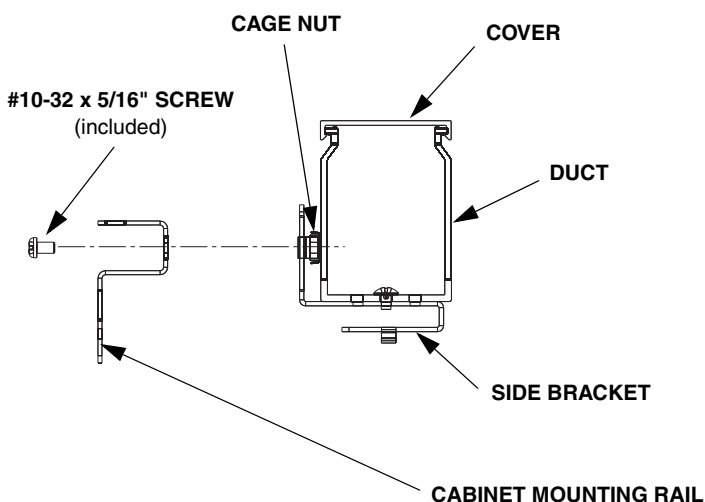


Align side mount bracket assembly to the cabinet mounting rail and fasten in place with included #10-32 x 5/16" screw.


FRONT BRACKET ASSEMBLY

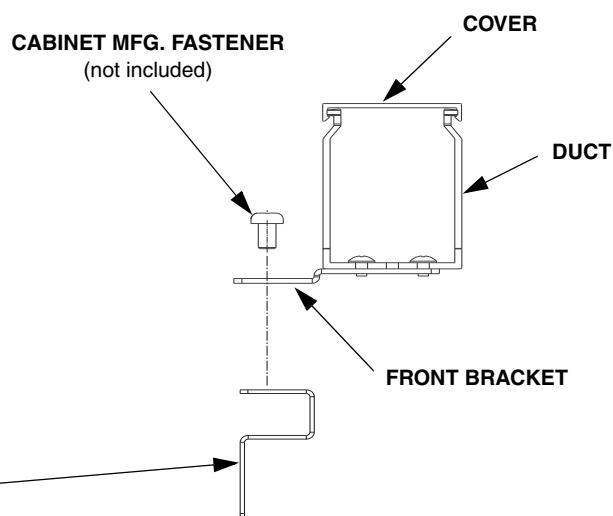

Align front mount bracket assembly to the cabinet mounting rail and fasten in place with cabinet manufacturer's fastener.

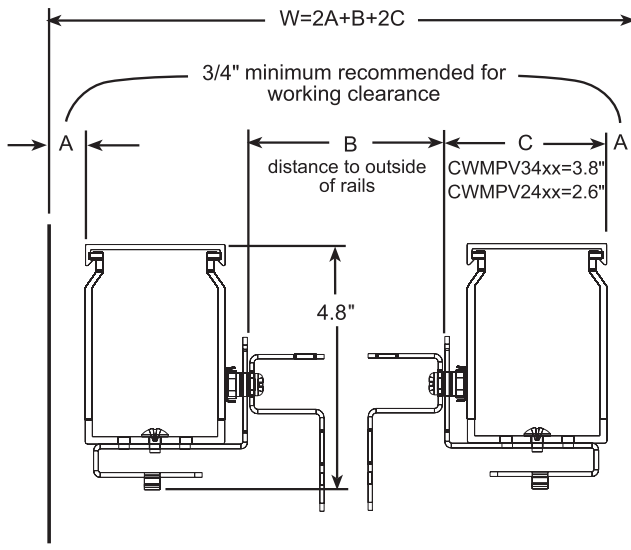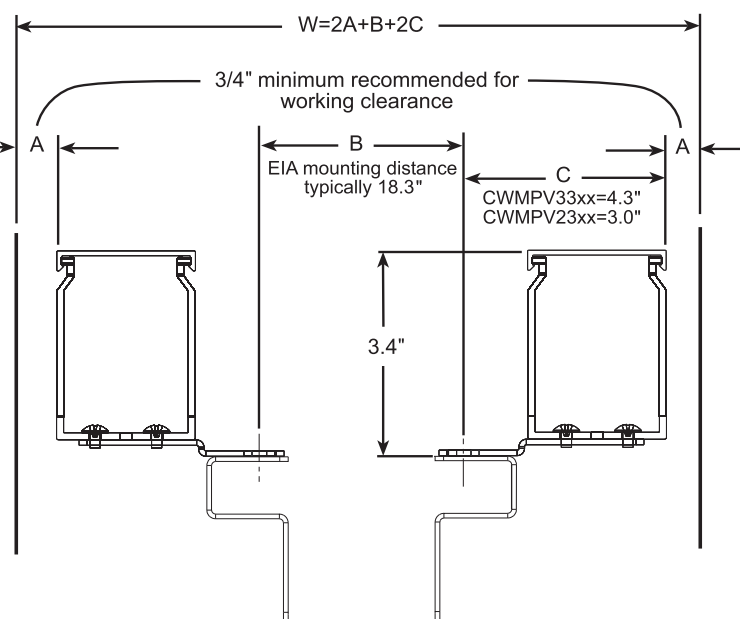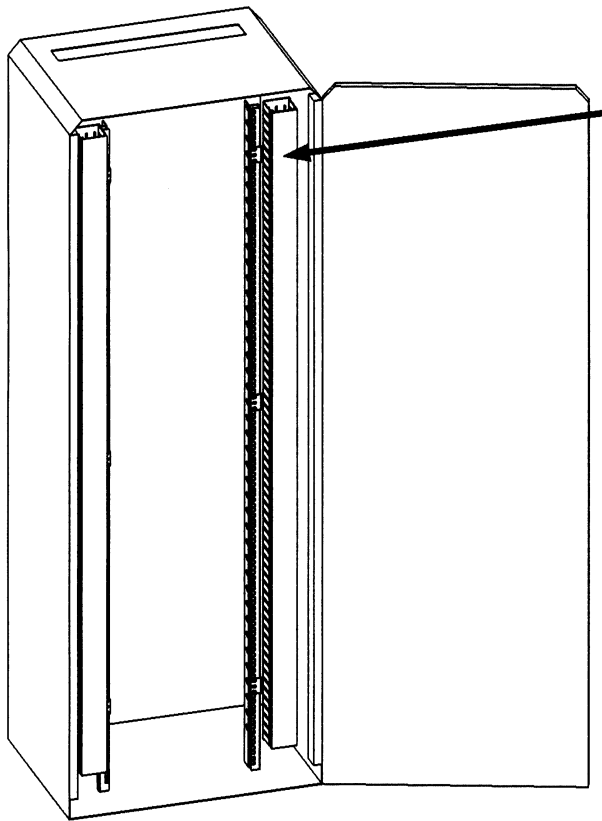SIDE MANAGER CABINET WIDTH FORMULA**FRONT MANAGER CABINET WIDTH FORMULA****TYPICAL CABINET INSTALLATION**

Cable bundle secured to the rear of the cable managers using Panduit Tak-Tys.

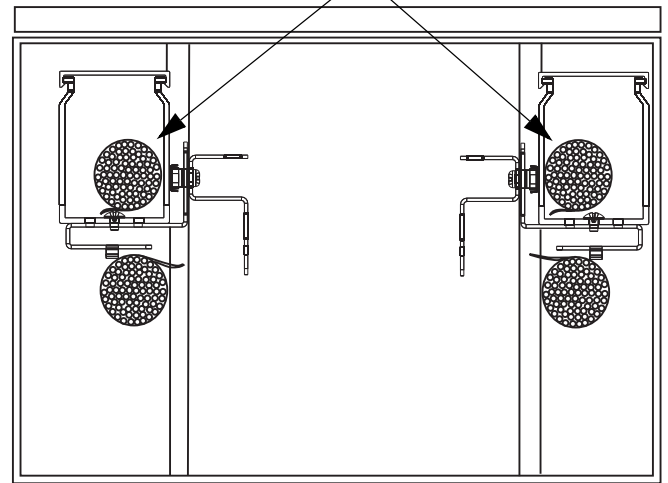

For Instructions in Local Languages
and Technical Support:

www.panduit.com/resources/install_maintain.asp

PANDUIT
www.panduit.com

E-mail:
techsupport@panduit.com

Phone:
866-405-6654