THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	FIGURE	CONDUCTOR RANGE	DIMENSIONS - IN [mm] ±.1 [2.5]			BOLT DIA	WRENCH SIZE
			L	W	H		
GM-1-Q	1	8 SOL - 4 STR	1.25 [32]	1.00 [25]	1.63 [41]	3/8"	9/16"
GM-2-Q	1	4 SOL - 2/0 STR	1.63 [41]	1.13 [29]	1.75 [45]	3/8"	9/16"
GM-3-Q	1	2/0 SOL - 250 kcmil	2.13 [54]	1.50 [38]	2.00 [51]	1/2"	3/4"
GM-3E-X	2	4 SOL - 300 kcmil	1.96 [50]	1.50 [38]	2.32 [59]	1/2"	3/4"
GM-4-X	2	300 kcmil - 500 kcmil	2.38 [60]	1.63 [41]	2.50 [63]	1/2"	3/4"

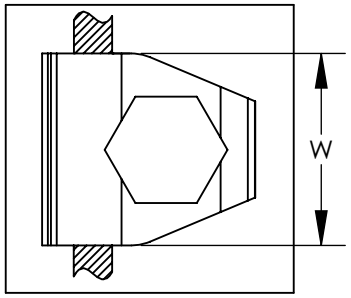



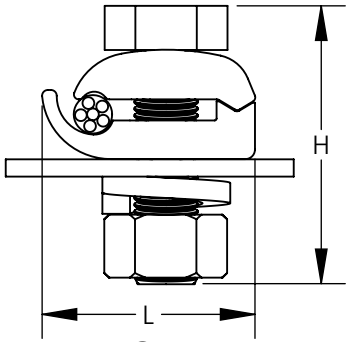

FIGURE 1



FIGURE 2

NOTES:

1. MADE FROM HIGH COPPER CONTENT ALLOY. FURNISHED WITH FULL THREADED SILICON BOLT, NUTS, AND LOCKWASHERS.
2. THESE CONNECTORS ARE UL LISTED FOR GROUNDING AND BONDING, AND DIRECT BURIAL APPLICATIONS.
3. SEE www.PANDUIT.com FOR PACKAGE QUANTITIES.

c UL us LISTED 467

DB RATED

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07	4/20	JHNU	RGB	RGB	ADDED WRENCH SIZE TO TABLE	N41169BB-C41169
06	8/18	JHNU	JHNU	RGB	REMOVED GM-5-5, GM-6-5	N41169BB-C41169
05	7/18	JHNU	JHNU	RGB	ADDED GM-1-Q, GM-4-X, GM-3E-X, GM-5-5, GM-6-5	038340
04	11/15	JHNU	JHNU	RGB	REVISED WIRE RANGE FOR GMS-3-Q: 2/0 SOL WAS 2/0 STR	N41169BB-C41169

TITLE: BRONZE GROUND CLAMP
GM SERIES
CUSTOMER DRAWING

ITEM REVISION NAME: N41169BB/07

DATASET FILE NAME: N41169BB-C41169/07.SLDDRW

PANDUIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ±
.XX ±
.XXX ±
ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: C41169

DRAWN BY	DATE	CHK	SCALE	SHEET	SIZE
ED	10/95	WJB	N/A	SHEET 1 0F 1	A