Steel City[®]


Stud Wall and Drywall Accessories

Grounding Devices



Grounding Clip


- For grounding switch and outlet boxes using nonmetallic sheathed cables with ground wire
- Grounds #12 and #14 copper and #12 aluminum conductors

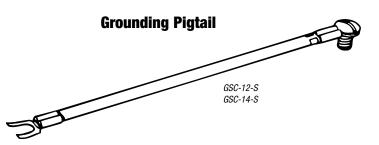

Grounding Screw

Grounding Screw and Wire

 A prelooped 6"-long bare or insulated copper ground wire attached to a 10-32 x ³/₈" hexagon-head washer-face screw, colored green





CAT. NO.	DESCRIPTION	STD. CTN.	UNIT PKG.
Grounding Clip			
GEE	Zinc-plated, spring-steel, colored green accommodates #12 and #14 copper and #12 aluminum solid conductors in non-metallic sheathed cable. Also approved for connecting bonding jumper from receptacle to grounded metal device box. 50 per unit package	1,000	—
Grounding Screws and Pigtails			
GSC 12	10-32 x %" slotted hexagon-head washer-face ground screw with green dye finish and a six-inch solid copper #12 AWG insulated wire	1,000	100
GSC-12-S*	#12 AWG insulated eight-inch stranded pigtail with a captive 10-32 x %" round head screw on one end and a fork-tongue terminal on the other end	1,000	100
GSC-12-10 1/2	10-32 x %" slotted hexagon-head washer-face ground screw with green dye finish and a 10½ inch solid-copper #12 AWG insulated wire	1,000	100
GSC 14	10-32 x %" slotted hexagon-head washer-face ground screw with green dye finish and a six-inch solid-copper #14 AWG insulated wire	1,000	100
GSC 14 S*	#14 AWG insulated eight-inch stranded pigtail with a captive 10-32 x %" round head screw on one end and a fork-tongue terminal on the other end	1,000	100
GSB 12	10-32 x %" slotted hexagon-head washer-face ground screw with green dye finish and a six-inch solid-copper #12 AWG bare wire	1,000	100
GSB 14	10-32 x %" slotted hexagon-head washer-face ground screw with green dye finish and a six-inch solid-copper #14 AWG bare wire	1,000	100
GS 1-SC	10-32 x %" slotted hexagon-head washer-face screw with green dye finish. Provides positive ground continuity in boxes with a #10-32 tapped hole	1,000	100

* Eight-inch stranded pigtail is also available with a captive 10-32 x 3/4" round-head screw on one end and a fork-tongue terminal on the other end.



United States Tel: 901.252.8000 800.816.7809 Fax: 901.252.1354 Technical Services Tel: 888.862.3289

