



Wire Mesh Tray

U-shaped, spot-welded from steel wires, with welded connector

MTC 105.150 F NX **CITO**Line

EAN Code: 4013339712168
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

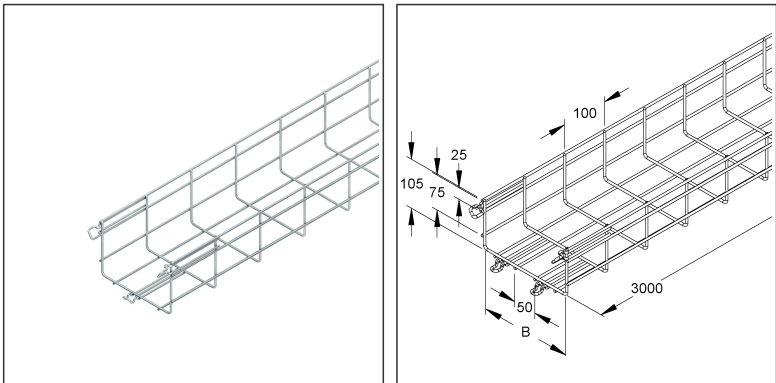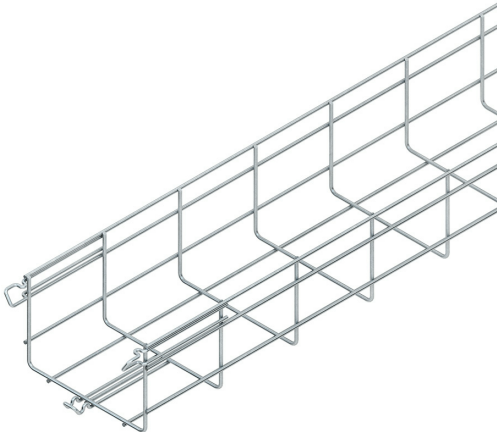

Article Description

Wire mesh tray, U-shaped, w. welded connector, 105x150x3000 mm, CITO, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	1,294 kg / m
Weight in kg per 100	129 kg/ 100m

Technical Datasheet

Wire Mesh Tray System


MTC 105.150 F NX CITO^{Line}

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	108.80 mm
Width	165.60 mm
Depth/length	3024 mm

Load Specifications

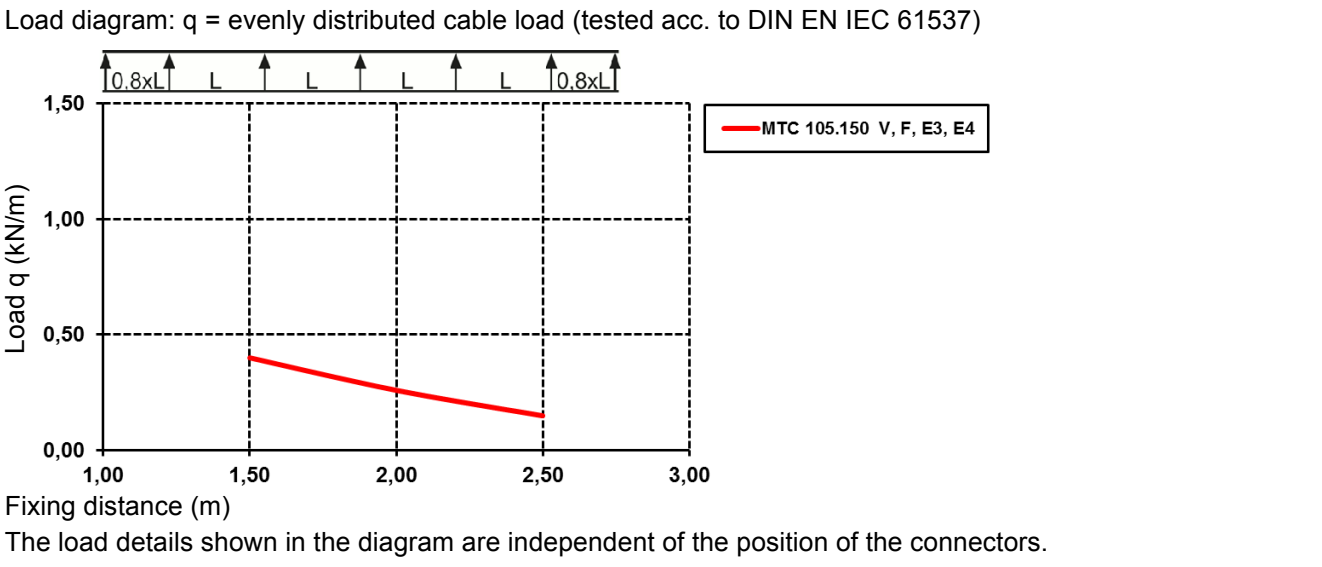

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		
Lenght	3024 mm	Width	166.00 mm	Height 109.00 mm
Gross weight	3,88 kg	Volume	0,054 m³	
Min. quantity	3.00 m	Max. Quantity	3.00 m	
6 meters = 1 bundle				
Lenght	3024 mm	Width	171.00 mm	Height 114.00 mm
Gross weight	7,76 kg	Volume	0,059 m³	
Min. Quantity	6.00 m	Max. Quantity	6.00 m	
240 meters = 1 rack				
Lenght	3024 mm	Width	1162 mm	Height 1120 mm
Gross weight	408 kg	Volume	3,935 m³	
Min. Quantity	240.00 m	Max. Quantity	240.00 m	

Tender Text

Wire mesh tray according to DIN EN 61537, U-shaped, made of steel wires, spot-welded, for quick fixing with welded splice plates in the sides and bottom.
VDE certified!
Dimensions (approx. dimensions) Nominal dimension H x W (inside) : 105 x 150 mm
Longitudinal wire Ø : 3.9 mm

Technical Datasheet

Wire Mesh Tray System

MTC 105.150 F NXCITO^{Line}

the photorealistic images are to be considered as reference images

Tender Text

Bottom longitudinal wire spacing : 50 mm
Transverse wire Ø : 3.9 mm
Transverse wire spacing : 100 mm
Delivery length L : 3000 mm
Usable cross-section : 15185 mm²
Material : Steel, hot-dip galvanised according to DIN EN ISO 1461
NIEDAX Model no. : MTC 105.150 F
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	FR
Customs tariff number	73089098

Related items

Cover

Model No.	Description
GRDHL 30 F	Cover retaining lug for cover wire mesh tray, steel, hot dip galvanised DIN EN ISO 1461
GTD 150 F	Cover for wire mesh tray, 150x3000 mm, steel, HDGAF, acc. DIN EN ISO 1461
MTCC 150/7.5° F	Cover for MTC wire mesh tray, 161x3000 mm, 7,5° tilt angle, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
GRTB 6 F	Barrier strip fastening clamp, steel, hot dip galvanised DIN EN ISO 1461
GRVC 14 F	Barrier strip fastening clamp, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 110 F	Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 85 F	Barrier strip, 80x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories