

Wire Mesh Tray

U-shaped, spot-welded from steel wires, with welded connector




MTC 105.400 V NX CITO Line

EAN Code: 4013339711390

Smallest packaging unit:3 m

quantity unit:m M

the photorealistic images are to be considered as reference images

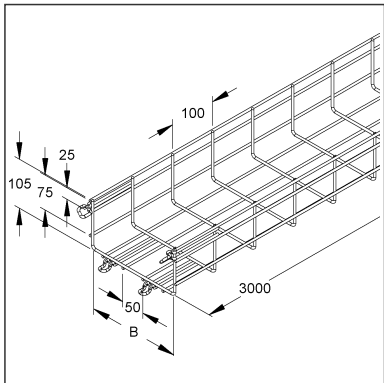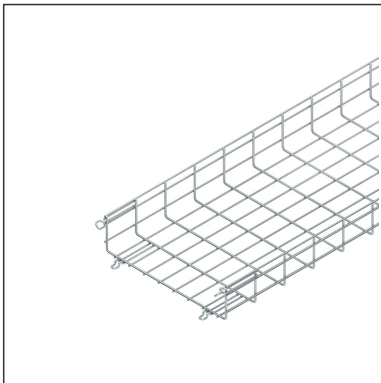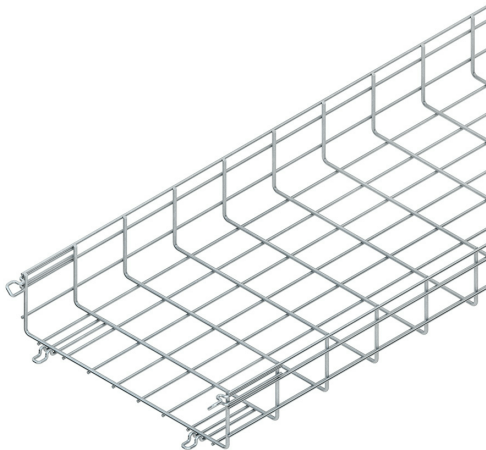

Article Description

Wire mesh tray, U-shaped, w. welded connector, 105x400x3000 mm, CITO, steel, electro galvanised according DIN EN ISO 2081, blue passivated

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,260 kg / m
Weight in kg per 100	326 kg / 100m

Technical Datasheet

Wire Mesh Tray System


MTC 105.400 V NX CITO Line

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	110.52 mm
Width	421 mm
Depth/length	3033 mm

Load Specifications

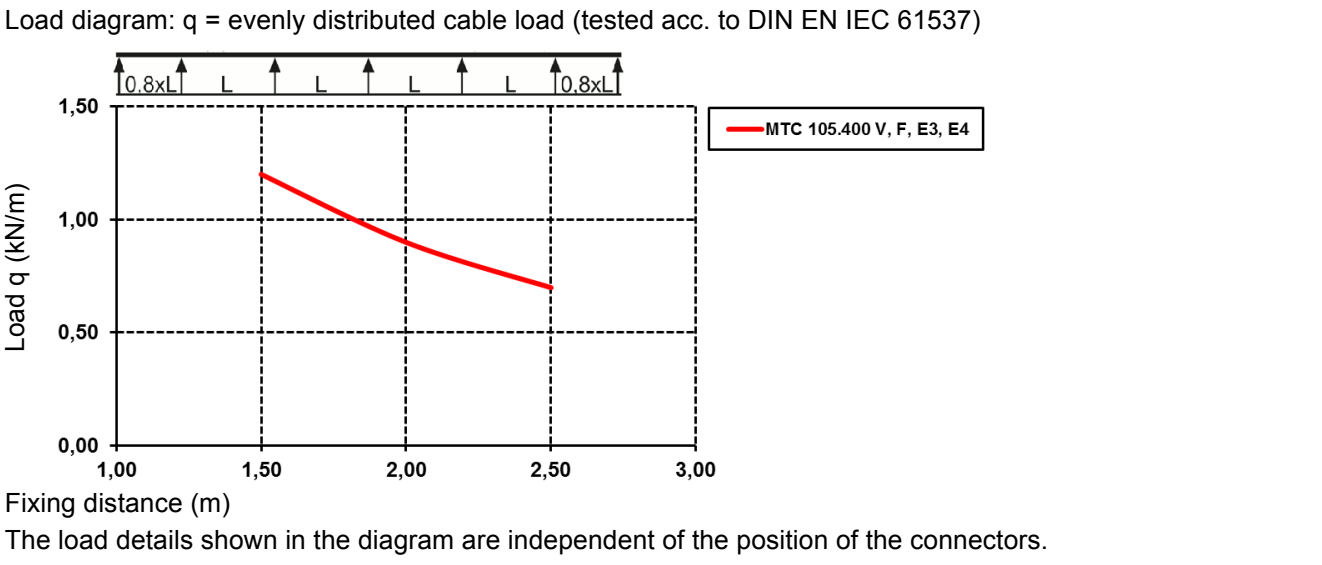

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	3033 mm	Width	422 mm	Height	111.00 mm
Gross weight	9,78 kg	Volume	0,141 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		
6 meters = 1 bundle					
Lenght	3033 mm	Width	427 mm	Height	116.00 mm
Gross weight	20 kg	Volume	0,149 m³		
Min. Quantity	6.00 m	Max. Quantity	6.00 m		
96 meters = 1 rack					
Lenght	3033 mm	Width	1162 mm	Height	1120 mm
Gross weight	411 kg	Volume	3,947 m³		
Min. Quantity	96.00 m	Max. Quantity	96.00 m		

Tender Text

Wire mesh tray according to DIN EN 61537, U-shaped, made of steel wires, spot-welded, for quick fixing with welded splice plates in the sides and bottom.
VDE certified!
Dimensions (approx. dimensions) Nominal dimension H x W (inside) : 105 x 400 mm
Longitudinal wire Ø : 4.82 mm

Technical Datasheet

Wire Mesh Tray System

MTC 105.400 V NXCITO_{Line}

the photorealistic images are to be considered as reference images

Tender Text

Bottom longitudinal wire spacing : 50 mm
Transverse wire Ø : 5.82 mm
Transverse wire spacing : 100 mm
Delivery length L : 3000 mm
Usable cross-section : 40008 mm²
Material : Steel, galvanised according to DIN EN ISO 2081, blue passivated
NIEDAX Model No. : MTC 105.400 V
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	CH
Customs tariff number	73089098

Related items

Cover

Model No.	Description
GRDHL 30 S	Cover retaining lug for cover wire mesh tray, steel, pre-galvanised according to DIN EN 10346
GTD 400 S	Cover for wire mesh tray, 40x3000 mm, steel, mill gal., acc. DIN EN 10346
MTCC 400/7.5° S	Cover for MTC wire mesh tray, 415,7x3000 mm, 7,5° tilt angle, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
GRTB 6 S	Barrier strip fastening clamp, steel, pre-galvanised according to DIN EN 10346
GRVC 14	Barrier strip fastening clamp, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 110	Barrier strip, 98x3000 mm, t=0,9 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 85	Barrier strip, 80x3000 mm, t=0,9 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories